INCH-POUND

MIL-M-28787/429
5 August 1991

# MILITARY SPECIFICATION

## MODULES, STANDARD ELECTRONIC

## MIL-STD-1553 COMMON BUS INTERFACE MODULE, KEY CODE GWB

**This specification is approved for use by all Departments and Agencies of the Department of Defense.**

The requirements for acquiring the modules described herein shall consist of this specification and the latest issue of MIL-M-28787.

### 1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic MIL-STD-1553 common bus interface module.

1.2 Classification. This specification covers two classes of modules. Classes I and II as specified in MIL-STD-1389.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, Code SEA-55Z3, Department of the Navy, Washington, D.C. 20362-5101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standards. The following specification and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Modules furnished under this specification shall be products which are authorized by the qualifying activity for listing on the applicable qualified products list by the time of award of contract (see 4.5).



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

3.2 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.3 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

3.4 Failure rate requirements. All modules procured to this specification shall have a predicted failure rate no greater than 3.827 failures per million operating hours for class I or 11.447 failures per million operating hours for class II, when predicted in accordance with MIL-STD-1389. When a class II module is used in a class I environment, the failure rate for class I shall be used for reliability prediction.

3.5 Performance requirements. The module shall conform to the electrical requirements specified in table I and shall operate within the environment of design class I or class II as specified in MIL-STD-1389.

3.5.1 Substitutability. Class II modules are substitutable for class I modules. When class II modules are used in class I environments, the failure rate for class I shall be used for reliability prediction.

3.6 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.6.1 Key code. The module key code shall be GWB.

3.6.2 Size. The module size shall be 2A Format B.

3.6.3 Weight. The module shall have a maximum weight of 112 grams.

3.6.4 Contact pins. The module shall have 100 contact pins positioned 1 through 50 in one row and 51 through 100 in the other row.

3.6.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.6.6 Depth. The module shall have no additional depth requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

| Test cond | Parameter 5/ | Ref test table | Test type 1/-3/ | 25 ± 5°C 4/ | | Class I 4/ 0 ± 5°C 60 ± 5°C | | Class II 4/ -55 ± 5°C 95 ± 5°C | | Units |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Min | Max | Min | Max | Min | Max | |
| A | Isolation | II | S | 10 | INF | 10 | INF | 10 | INF | MOhm |
| B1-B6 | Continuity | III | X | 0 | 1 | 0 | 1 | 0 | 1 | Ohm |
| C | Vcc stress | IV | Q | ---------- Module shall pass all remaining tests ---------- | | | | | | |
| D1-D3 | Ibd | V | S | -0.024 | 0.124 | -0.024 | 0.124 | -0.024 | 0.124 | mA |
| D4-D6 | Ibd | V | S | 0.0 | 0.1 | 0.0 | 0.1 | 0.0 | 0.1 | mA |
| D7 | Ibd | V | S | 0.0 | 1.1 | 0.0 | 1.1 | 0.0 | 1.1 | mA |
| D8 | Ibd | V | S | 0.0 | 0.2 | 0.0 | 0.2 | 0.0 | 0.2 | mA |
| D9 | Ibd | V | S | -0 024 | 1.02 | -0.024 | 1.02 | -0.024 | 1.02 | mA |
| D10 | Ibd | V | S | 0 0 | 0.2 | 0 0 | 0.2 | 0.0 | 0 2 | mA |
| D11-D13 | Ibd | V | S | 0 0 | 1.0 | 0 0 | 1.0 | 0.0 | 1 0 | mA |
| D14 | Ibd | V | S | 0 0 | 0.1 | 0.0 | 0.1 | 0.0 | 0 1 | mA |
| D15 | Ibd | V | S | 0.0 | 0.2 | 0.0 | 0.2 | 0.0 | 0.2 | mA |
| D16-D19 | Ibd | V | S | -0 024 | 0.124 | -0.024 | 0.124 | -0.024 | 0.124 | mA |
| D20-D23 | Ibd | V | S | 0 0 | 0.1 | 0.0 | 0.1 | 0.0 | 0 1 | mA |
| D24-D26 | Ibd | V | S | -0 024 | 1.02 | -0.024 | 1.02 | -0.024 | 1 02 | mA |
| D27 | Ibd | V | S | 0 0 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | mA |
| E1-E10 | Ioe | VI | S | -325.0 | -100.0 | -325.0 | -100.0 | -325.0 | -100.0 | nA |
| E11 | Ioe | VI | S | -150.0 | -60.0 | -150.0 | -60.0 | -150.0 | -60.0 | nA |
| E12-E25 | Ioe | VI | S | -325.0 | -100.0 | -325.0 | -100.0 | -325.0 | -100.0 | nA |
| E26 | Ioe | VI | S | -150.0 | -60.0 | -150.0 | -60.0 | -150.0 | -60.0 | nA |
| E27-E42 | Ios | VI | S | -325.0 | -100.0 | -325.0 | -100.0 | -325.0 | -100.0 | nA |
| E43-E45 | Ios | VI | S | -130.0 | -30.0 | -130.0 | -30.0 | -130.0 | -30.0 | nA |
| E46-E62 | Ios | VI | S | -325 0 | -100.0 | -325.0 | -100.0 | -325.0 | -100 0 | nA |
| E63 | Ios | VI | S | -100 0 | -40.0 | -100.0 | -40.0 | -100.0 | -40 0 | nA |
| F1-F5 | Ith | VII | X | -0.25 | 0.07 | -0.25 | 0.07 | -0.25 | 0.07 | mA |
| F6-F8 | Ith | VII | X | -2 75 | -0.592 | -2.75 | -0.592 | -2.75 | -0.592 | mA |
| F9,F10 | Ith | VII | X | -0 65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| F11-F13 | Ith | VII | X | -0.6 | 0.02 | -0.6 | 0.02 | -0.6 | 0.02 | mA |
| F14,F15 | Ith | VII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |

- See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE I Module electrical requirements - Continued.

| Test cond | Parameter 5/ | Ref test table | Test type 1/-3/ | 25 ± 5°C 4/ | | Class I 4/ 0 ± 5°C 60 ± 5°C | | Class II 4/ -55 ± 5°C 95 ± 5°C | | Units |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Min | Max | Min | Max | Min | Max | |
| F16 | 11h | VII | X | -2.6 | 0.07 | -2.6 | 0.07 | -2.6 | 0.07 | mA |
| F17 | 11h | VII | X | -1 2 | 0.04 | -1.2 | 0.04 | -1.2 | 0 04 | mA |
| F18 | 11h | VII | X | -3 15 | -0.582 | -3.15 | -0.582 | -3.15 | -0.582 | mA |
| F19 | 11h | VII | X | -1.2 | 0.04 | -1.2 | 0.04 | -1.2 | 0.04 | mA |
| F20 | 11h | VII | X | -2.0 | 0.05 | -2.0 | 0.05 | -2.0 | 0.05 | mA |
| F21,F22 | 11h | VII | X | -0.25 | 0.025 | -0.25 | 0.025 | -0.25 | 0.025 | mA |
| F23 | 11h | VII | X | -1.6 | 0.02 | -1.6 | 0.02 | -1.6 | 0.02 | mA |
| F24 | 11h | VII | X | -1.2 | 0.04 | -1.2 | 0.04 | -1.2 | 0.04 | mA |
| F25-F28 | 11h | VII | X | -1.75 | -0.592 | -1.75 | -0.592 | -1.75 | -0.592 | mA |
| F29-F36 | 11h | VII | X | -0.25 | 0.07 | -0.25 | 0.07 | -0.25 | 0.07 | mA |
| F37-F52 | 11h | VII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| F53 | 11h | VII | X | -0 6 | 0.02 | -0.6 | 0.02 | -0.6 | 0 02 | mA |
| F54-F56 | 11h | VII | X | -0 2 | 0 02 | -0.2 | 0.02 | -0.2 | 0 02 | mA |
| F57-F59 | 11h | VII | X | -1 4 | -0.587 | -1.4 | -0.587 | -1.4 | -0.587 | mA |
| F60 | 11h | VII | X | -2.0 | 0.05 | -2.0 | 0.05 | -2.0 | 0.05 | mA |
| F61-F76 | 11h | VII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| G1-G5 | 11i | VIII | X | -0 25 | 0 07 | -0.25 | 0.07 | -0.25 | 0 07 | mA |
| G6-G8 | 11i | VIII | X | -2.75 | -0.582 | -2.75 | -0.582 | -2.75 | -0.582 | mA |
| G9,G10 | 11i | VIII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| G11-G13 | 11i | VIII | X | -0.6 | 0.02 | -0.6 | 0.02 | -0.6 | 0.02 | mA |
| G14,G15 | 11i | VIII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| G16 | 11i | VIII | X | -2.6 | 0.07 | -2.6 | 0.07 | -2.6 | 0.07 | mA |
| G17 | 11i | VIII | X | -1.2 | 0.04 | -1.2 | 0.04 | -1.2 | 0.04 | mA |
| G18 | 11i | VIII | X | -3.15 | -0.582 | -3.15 | -0.582 | -3.15 | -0.582 | mA |
| G19 | 11i | VIII | X | -1.2 | 0.04 | -1.2 | 0.04 | -1.2 | 0.04 | mA |
| G20 | 11i | VIII | X | -2 0 | 0.05 | -2.0 | 0.05 | -2.0 | 0 05 | mA |
| G21,G22 | 11i | VIII | X | -0 25 | 0.025 | -0.25 | 0.025 | -0.25 | 0 025 | mA |
| G23 | 11i | VIII | X | -1.6 | 0.02 | -1.6 | 0.02 | -1.6 | 0.02 | mA |
| G24 | 11i | VIII | X | -1.2 | 0.04 | -1.2 | 0.04 | -1.2 | 0.04 | mA |
| G25-G28 | 11i | VIII | X | -1.75 | -0.592 | -1.75 | -0.592 | -1.75 | -0.592 | mA |
| G29-G36 | 11i | VIII | X | -0.25 | 0.07 | -0.25 | 0.07 | -0.25 | 0.07 | mA |
| G37-G52 | 11i | VIII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| G53 | 11i | VIII | X | -0.6 | 0.02 | -0.6 | 0.02 | -0.6 | 0.02 | mA |

- See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

| Test cond | Parameter 5/ | Ref test table | Test type 1/-3/ | 25 ± 5°C 4/ | | Class I 4/ 0 ± 5°C 60 ± 5°C | | Class II 4/ -55 ± 5°C 85 ± 5°C | | Units |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Min | Max | Min | Max | Min | Max | |
| G54-G56 | Iil | VIII | X | -0.2 | 0.02 | -0.2 | 0.02 | -0.2 | 0.02 | mA |
| G57-G59 | Iil | VIII | X | -1.4 | -0.587 | -1.4 | -0.587 | -1.4 | -0.587 | mA |
| G60 | Iil | VIII | X | -2.0 | 0.05 | -2.0 | 0.05 | -2.0 | 0.05 | mA |
| G61-G76 | Iil | VIII | X | -0.65 | 0.07 | -0.65 | 0.07 | -0.65 | 0.07 | mA |
| H1-H63 | Voh | IX | X | 2.4 | 4.5 | 2.4 | 4.5 | 2.4 | 4.5 | V |
| J1-J58 | Vol | X | X | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | V |
| K1-K6 | Iozh | XI | X | -0.05 | 0.05 | -0.05 | 0.05 | -0.05 | 0.05 | mA |
| K7-K12 | Iozl | XI | X | -0.05 | 0.05 | -0.05 | 0.05 | -0.05 | 0.05 | mA |
| L1-L7 | Vic | XII | S | -1.2 | 0.0 | -1.2 | 0.0 | -1.2 | 0.0 | V |
| L8,L9 | Vic | XII | S | -1.5 | 0.0 | -1.5 | 0.0 | -1.5 | 0.0 | V |
| L10-L12 | Vic | XII | S | -1.2 | 0.0 | -1.2 | 0.0 | -1.2 | 0.0 | V |
| L13-L15 | Vic | XII | S | -1.5 | 0.0 | -1.5 | 0.0 | -1.5 | 0.0 | V |
| L16 | Vic | XII | S | -1.2 | 0.0 | -1.2 | 0.0 | -1.2 | 0.0 | V |
| M1 | PSFC | XIII | S | 5.8 | 10.7 | 5.8 | 10.7 | 5.8 | 10.7 | uF |
| M2 | PSFC | XIII | S | 7.0 | 13.0 | 7.0 | 13.0 | 7.0 | 13.0 | uF |
| N | Icc | XIV | X | 800 | 1910 | 800 | 1910 | 800 | 1910 | mA |
| P1,P2 | Functional | XV | X | See table XV | | | | | | |
| Q1,Q2 | Dynamic | XVI | S | See table XVI | | | | | | |
| Q3,Q4 | Dynamic | XVI | Q | See table XVI | | | | | | |
| R1-R4 | Ci/o | XVIII | Q | 4 | 100 | 4 | 100 | 4 | 100 | pF |
| R5 | Ci/o | XVIII | Q | 4 | 75 | 4 | 75 | 4 | 75 | pF |
| R6,R7 | Ci/o | XVIII | Q | 4 | 125 | 4 | 125 | 4 | 125 | pF |
| R8 | Ci/o | XVIII | Q | 4 | 150 | 4 | 150 | 4 | 150 | pF |
| R9,R10 | Ci/o | XVIII | Q | 4 | 75 | 4 | 75 | 4 | 75 | pF |
| R11-R13 | Ci/o | XVIII | Q | 2 | 75 | 2 | 75 | 2 | 75 | pF |

- See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE I Module electrical requirements - Continued.

| Test cond | Parameter 5/ | Ref test table | Test type 1/-3/ | 25 ± 5°C 4/ | | Class I 4/ 0 + 5°C 60 ∓ 5°C | | Class II 4/ -55 + 5°C 85 ∓ 5°C | | Units |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Min | Max | Min | Max | Min | Max | |
| R14-R19 | Ci/o | XVIII | Q | 4 | 75 | 4 | 75 | 4 | 75 | pF |
| R20-R23 | Ci/o | XVIII | Q | 2 | 75 | 2 | 75 | 2 | 75 | pF |
| R24 | Ci/o | XVIII | Q | 4 | 125 | 4 | 125 | 4 | 125 | pF |
| R25-R52 | Ci/o | XVIII | Q | 4 | 75 | 4 | 75 | 4 | 75 | pF |
| R53-R56 | Ci/o | XVIII | Q | 2 | 75 | 2 | 75 | 2 | 75 | pF |
| R57-R59 | Ci/o | XVIII | Q | 2 | 100 | 2 | 100 | 2 | 100 | pF |
| R60 | Ci/o | XVIII | Q | 2 | 125 | 2 | 125 | 2 | 125 | pF |
| R61-R76 | Ci/o | XVIII | Q | 4 | 75 | 4 | 75 | 4 | 75 | pF |
| T1, T2 | PSTR | XIX | Q | 0 | 400 | 0 | 400 | 0 | 400 | mV |

- See footnotes on next page.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

1/ "X" parameters shall be 100 percent tested during the module acceptance test.

2/ "S" parameters shall ~~be sample~~ acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.

3/ "Q" parameters shall be tested during qualification testing only.

4/ Unless otherwise specified in the test table, limits are for initial and end-of-life.

5/ Abbreviations used in table I are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

3.6.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.6.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part or identifying number M28787/429-1 for class I and M28787/429-2 for class II. No marking shall interfere with heat dissipation from the fin (such as affixing a label which may act as a heat barrier).

3.7 Circuit pin configuration. The functional block diagram shall conform to figure 1. The pin assignments shall conform to figure 2.

3.8 Acceptance test. All production modules shall be tested in accordance with footnotes 1 and 2 in table I.

3.9 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits in table I (see 6.2).

3.10 Power supply voltage. Unless otherwise specified herein, the module shall be capable of conforming to the requirements in table I for a power supply voltage (Vcc) of 5.5 V dc.

3.11 Parallel outputs. Paralleling of outputs is not permissible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. Unless otherwise specified herein, all resistors shall be metal film and all capacitors shall be ceramic.

4.4 Test procedures. The module shall be tested as specified in table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

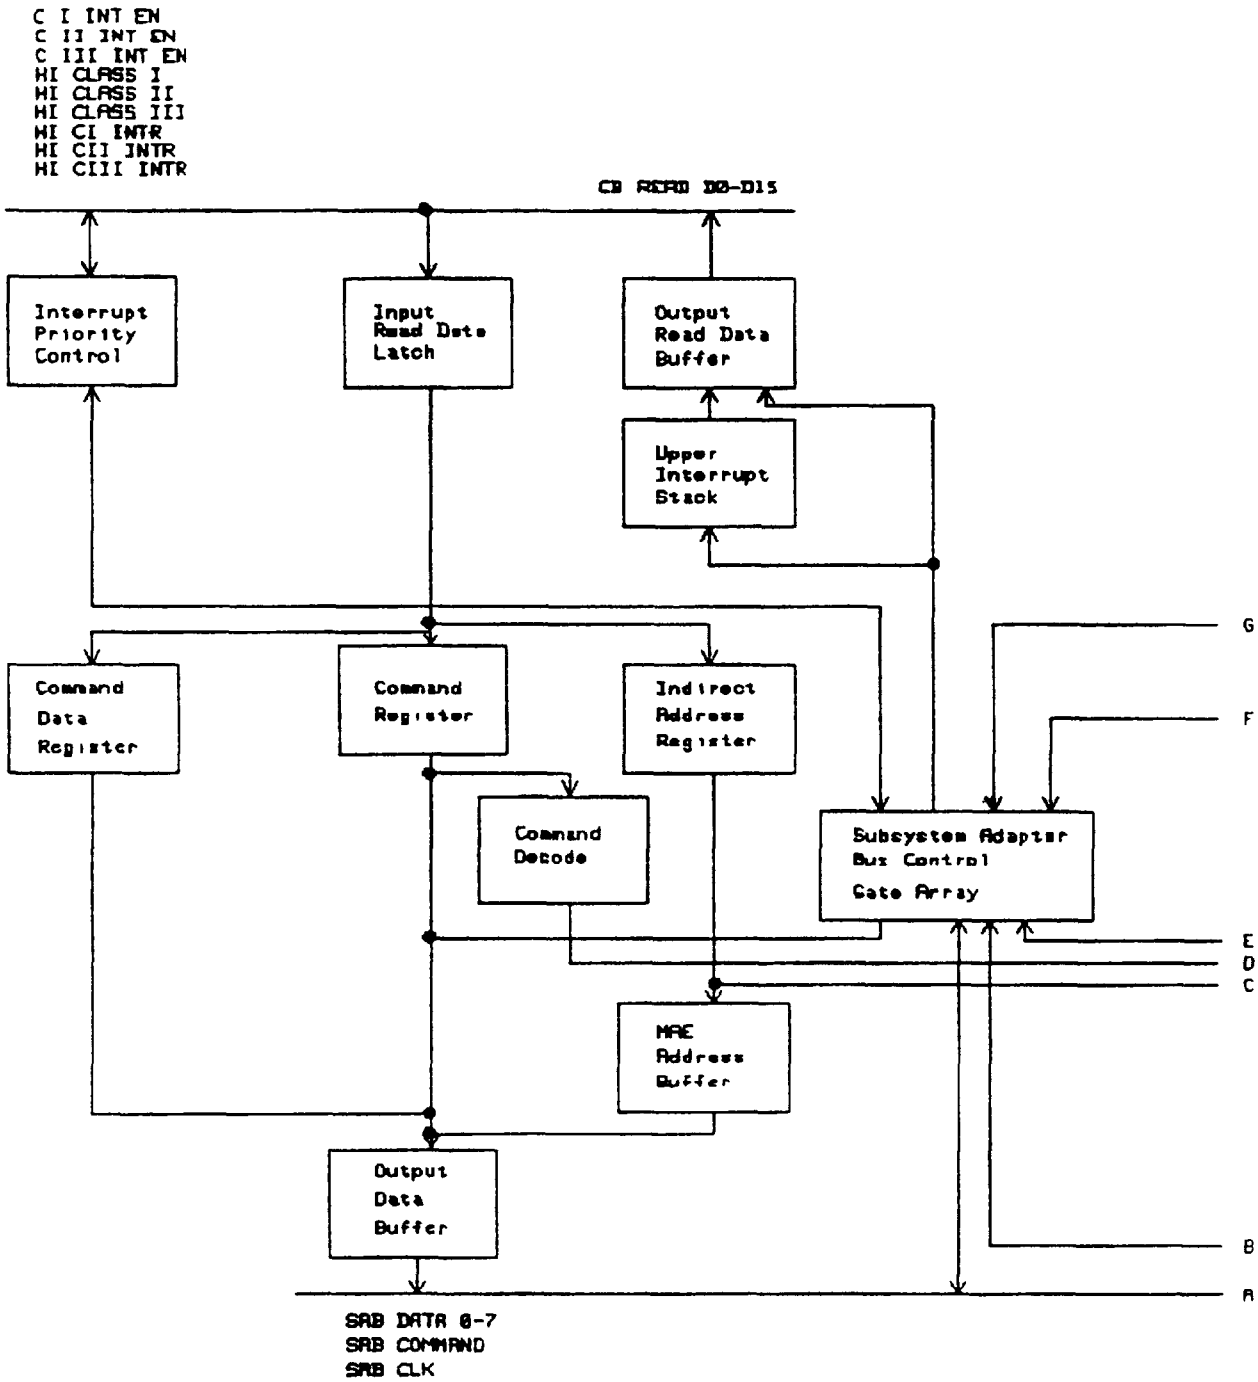



FIGURE 1. GWB functional block diagram.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

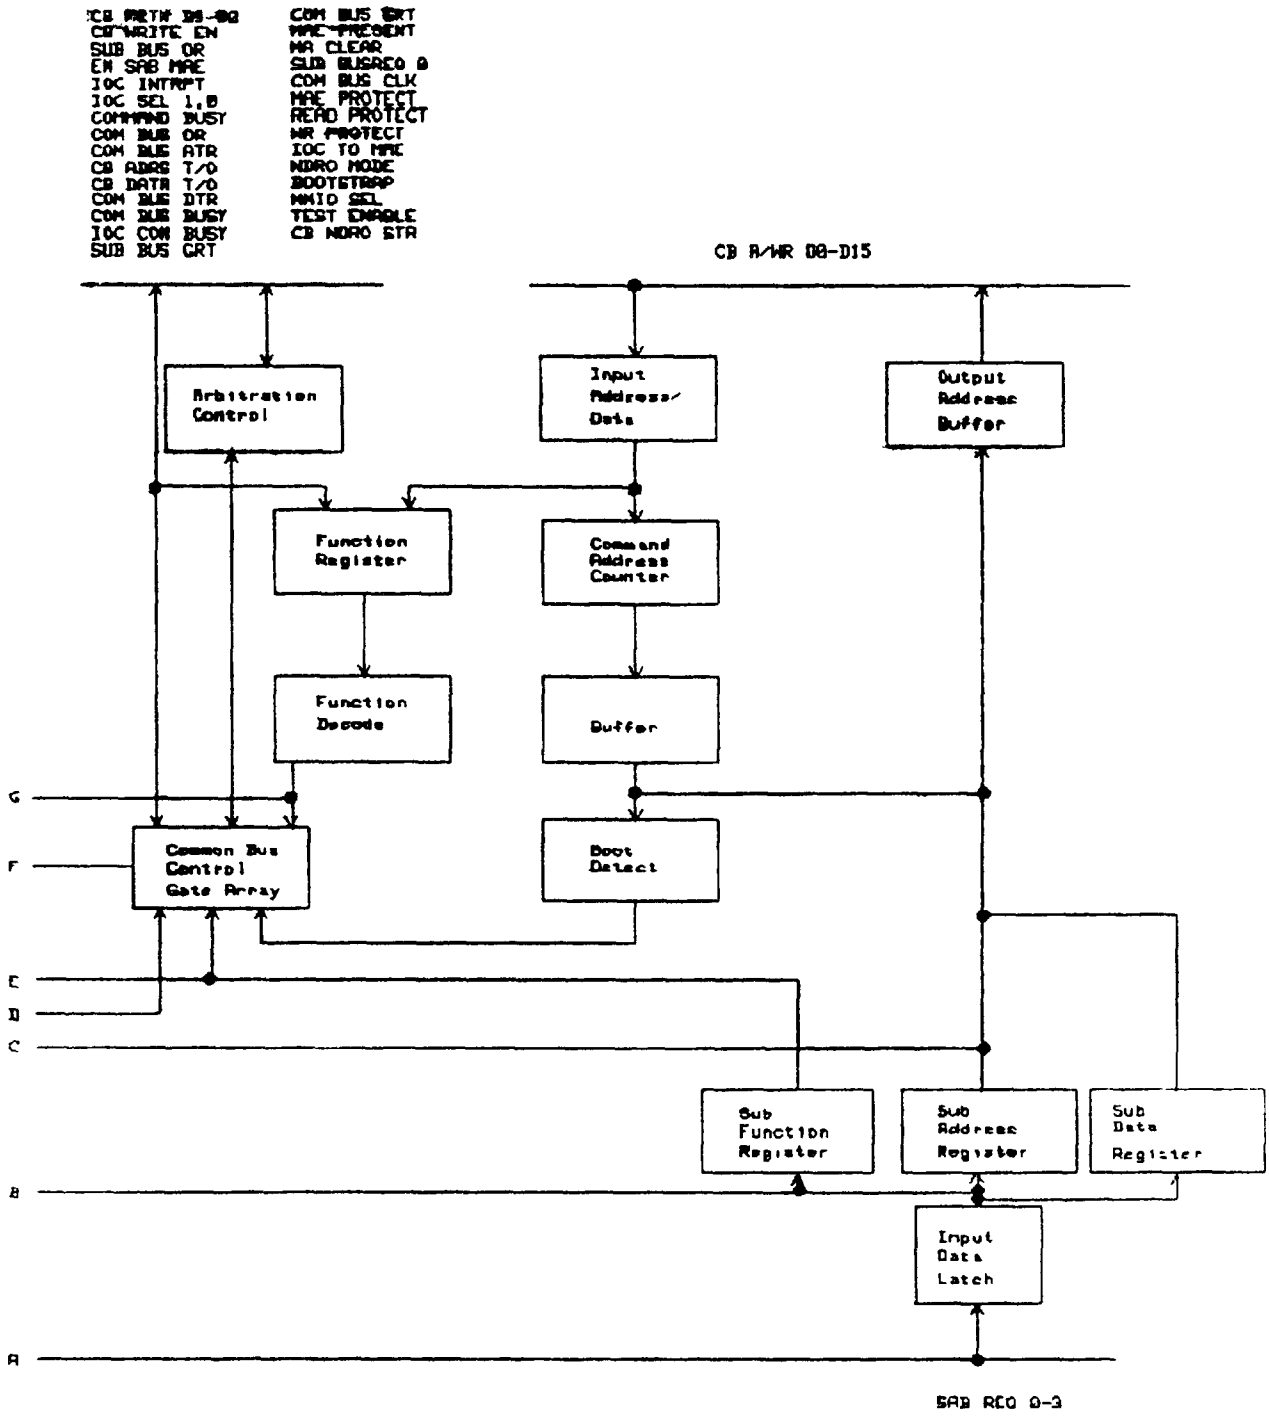



FIGURE 1. GWB functional block diagram - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

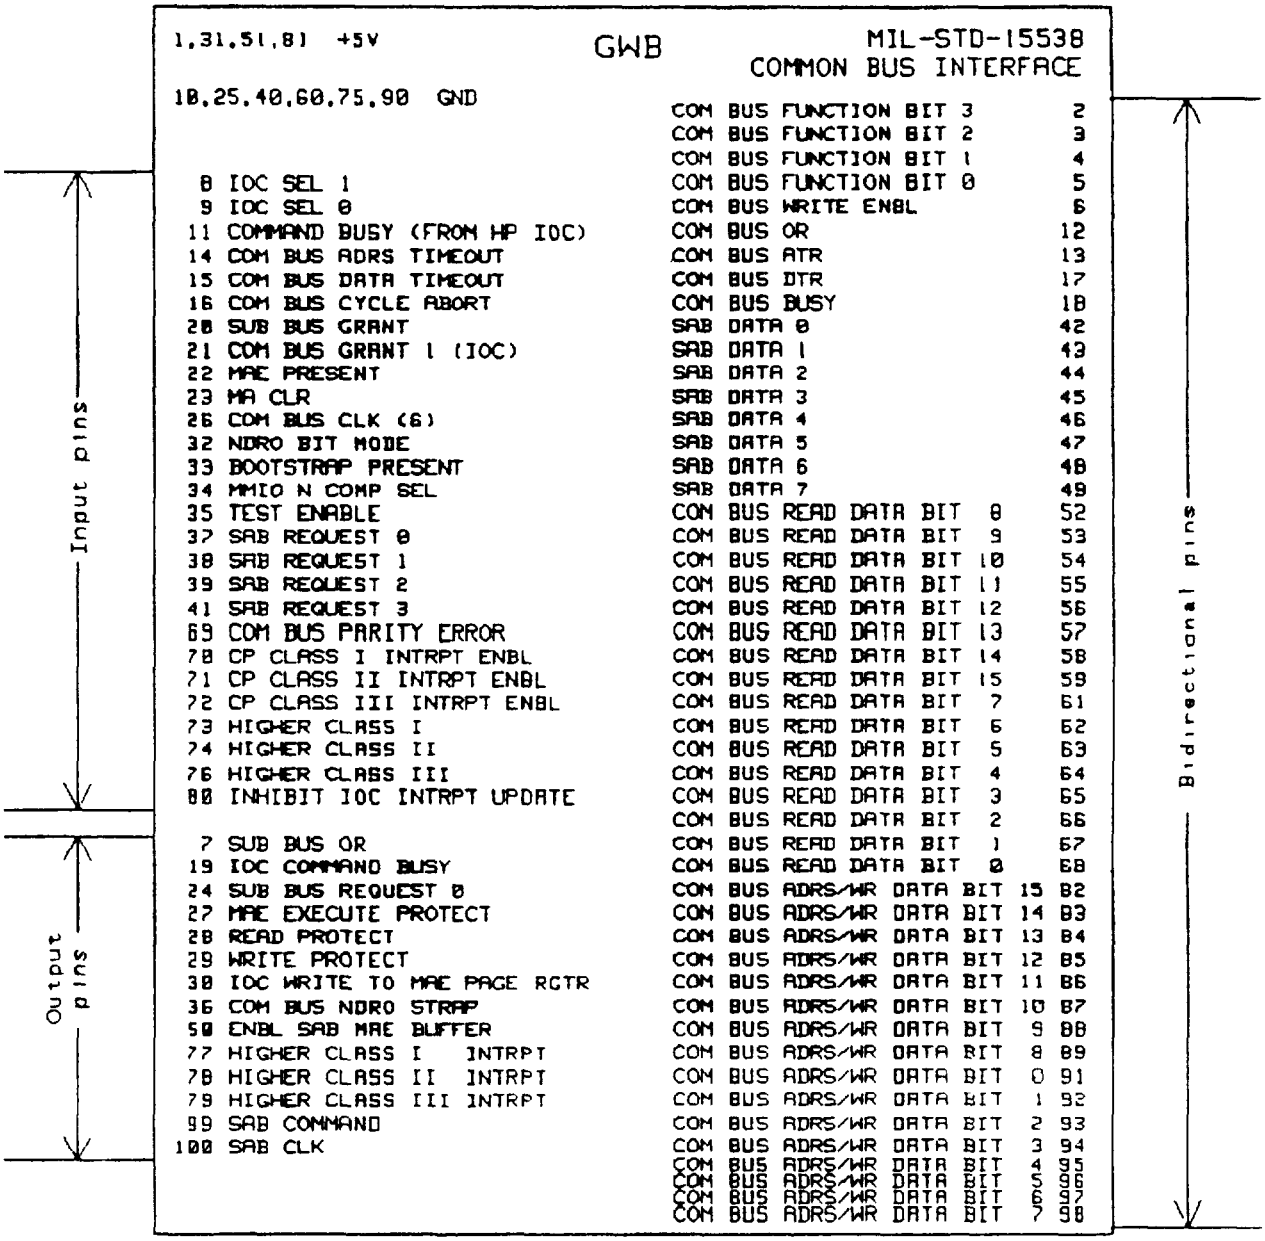



FIGURE 2. GWB pin assignment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Quality Assurance Activity (SEM-QAA) and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through T shall be performed in any order with the following exceptions. Test conditions A, C, D, E, and L are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, C, D, E or L are part of a sequence of tests, the order of testing shall be as follows: A, C, D, E, and L where applicable, followed by the remaining tests in the sequence.

4.4.3 Multiple testing of pins. Singular pins listed multiple times in a test table indicate multiple devices connected to the pins. The module shall be tested so that each device connected to a pin is exercised and tested.

4.5 Qualification testing. Initial qualification tests and periodic check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.


4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through T in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions B, F through K and M through Q shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 3.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 3.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 4. Following the vibration tests, the electrical tests in table I which are marked with an "X" in the test type column, and test condition M, shall be performed using the initial limits at 25 ± 5°C ambient.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

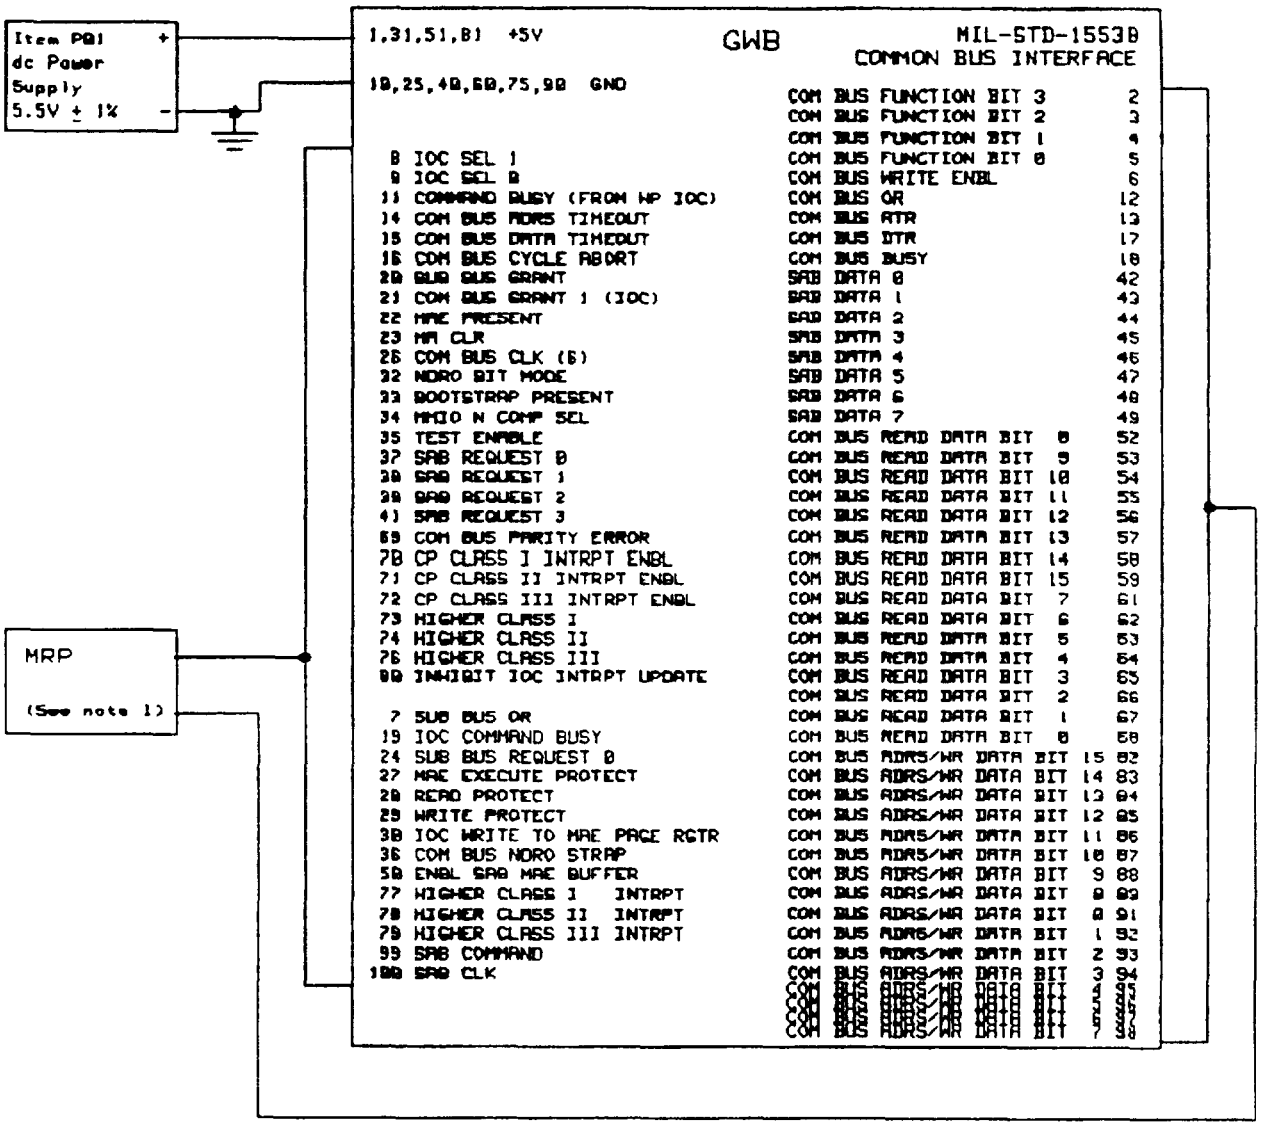


NOTE:

1. Military Reconfigurable Processor (MRP) or emulator capable of reproducing system backpanel characteristics.

FIGURE 3. GWB operating temperature and component temperature test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

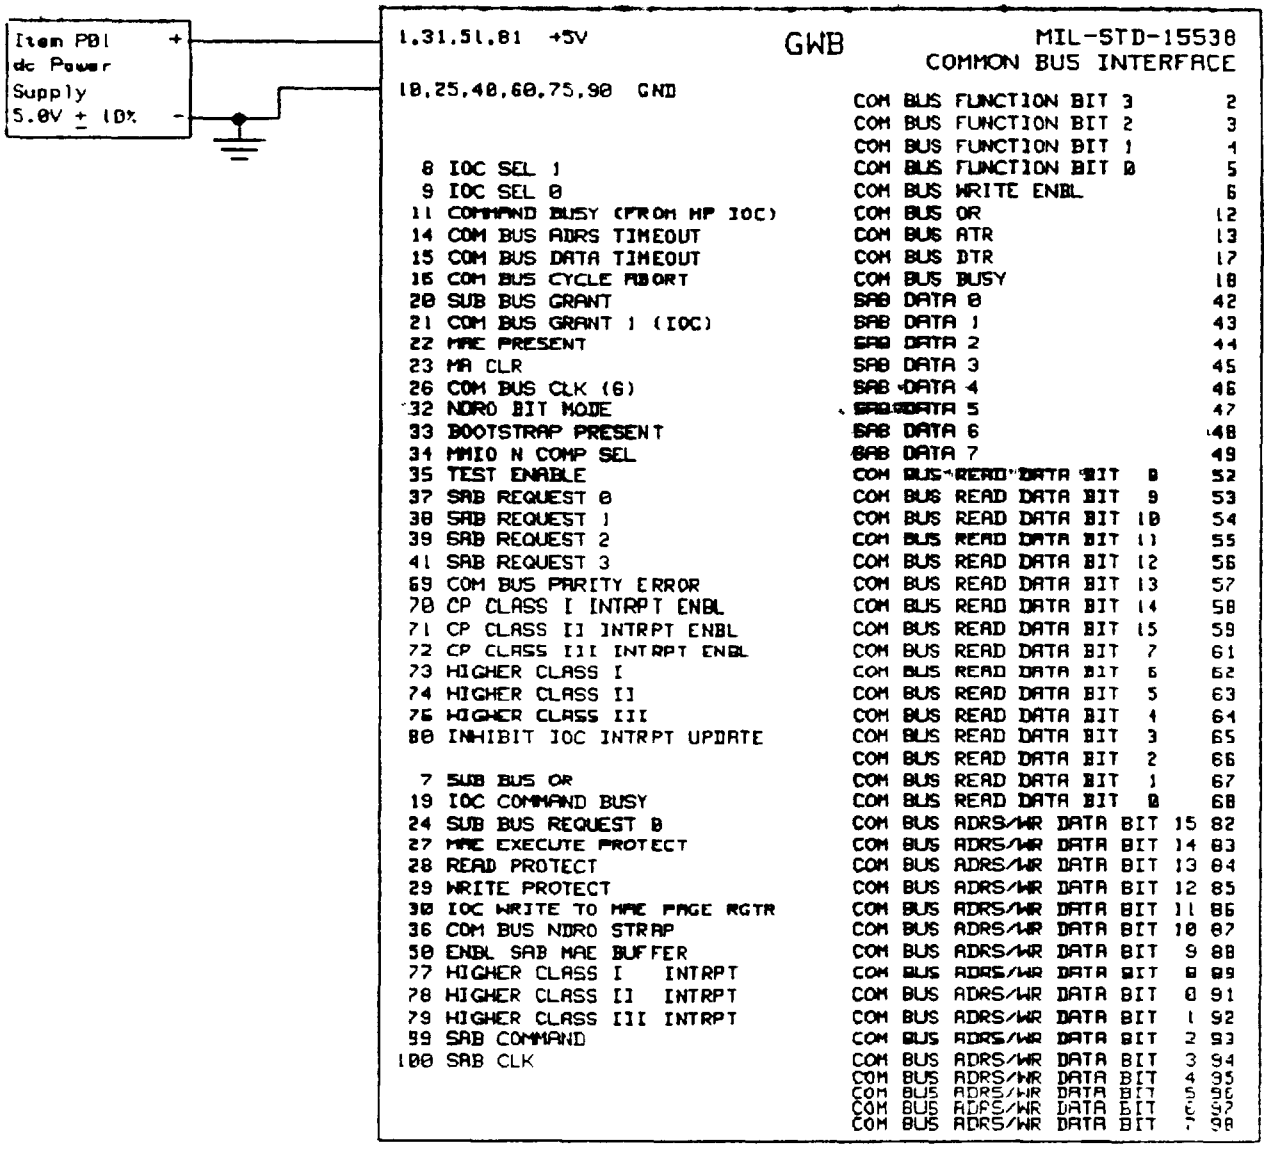



FIGURE 4. GWB vibration test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 5. Following the life test and while still at the maximum class temperature, electrical tests B, F through K and M through Q shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests B, F through K and M through Q shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I.


4.5.4 Thermal shock test. The thermal shock test shall be conducted in accordance with MIL-M-28787. The module shall be unpowered during this test. Following the thermal shock test, the electrical tests in table I which are marked with an "X" in the test type column, shall be performed using the initial limits at 25 ± 5°C ambient.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

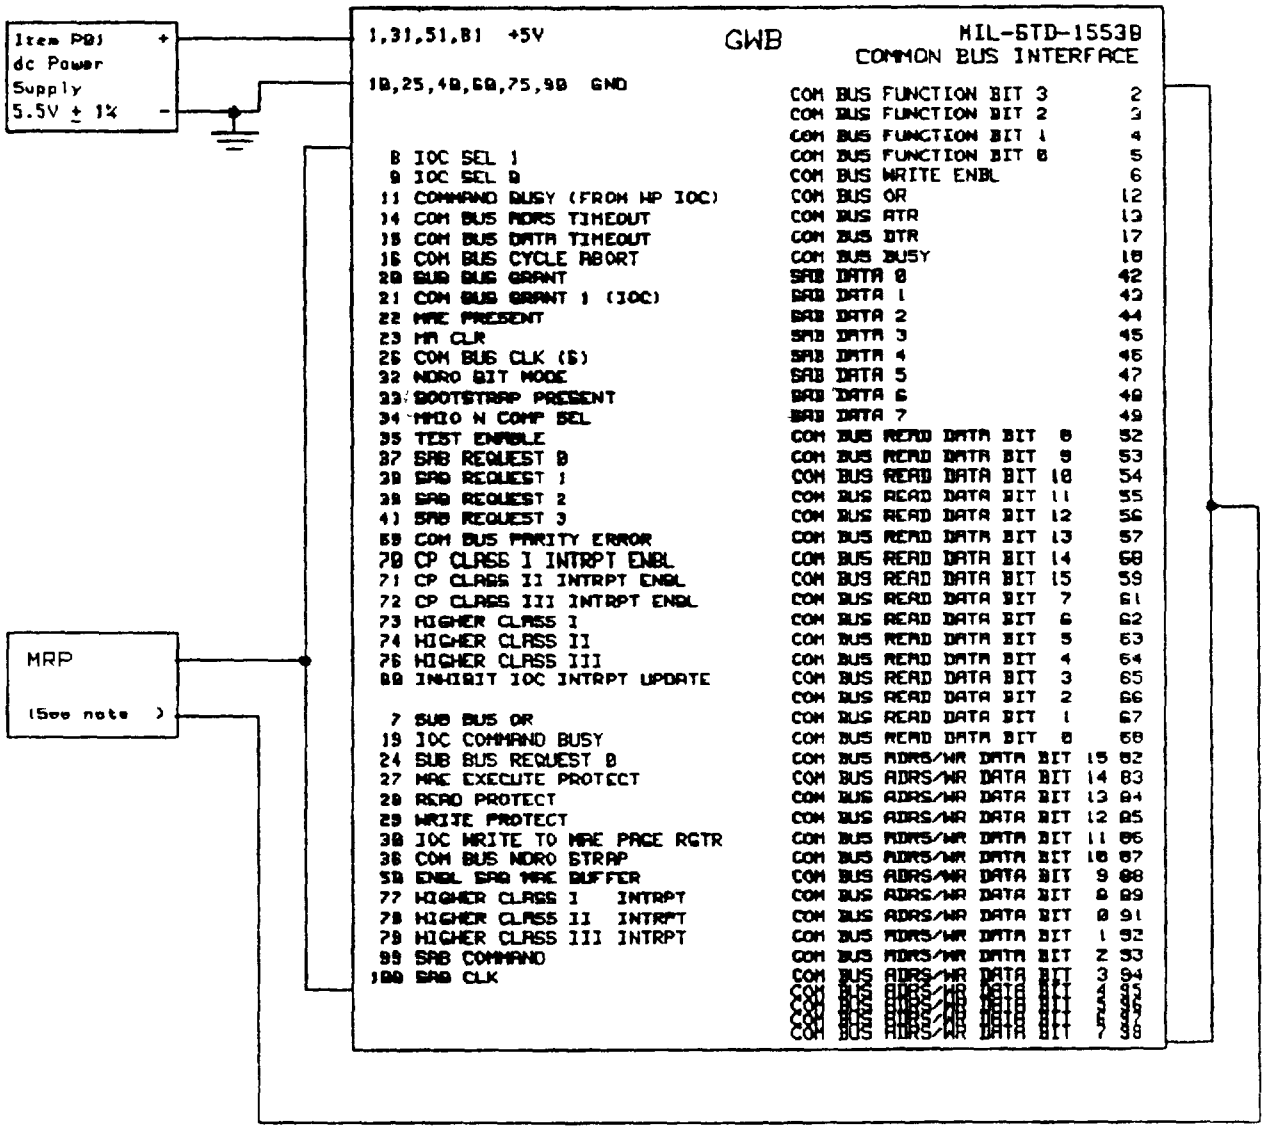


NOTE:

1. MRP or emulator capable of reproducing system backpanel characteristics.

FIGURE 5. GWB life test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Definitions. Negative (-) current is current directed out of the module pin and positive (+) current is current directed into the module pin. Abbreviations used in this specification are defined as follows:

(a) Cin = input capacitance.
(b) Ci/o = input/output capacitance.
(c) Cout = output capacitance.
(d) Ibd = input breakdown current.
(e) Icc = power supply current.
(f) Iih = input high level current.
(g) Iil = input low level current.
(h) Iin = input forcing current.
(i) Ioh = output high level current.
(j) Iol = output low level current.
(k) Ios = output short circuit current.
(l) Iozh = output high level leakage current.
(m) Iozl = output low level leakage current.
(n) NA = not applicable.
(o) PSFC = power supply filter capacitance.
(p) PSTA = power supply transient amplitude.
(q) Vic = input clamp diode voltage.
(r) Vih = input high level voltage.
(s) Vil = input low level voltage.
(t) Vin = input forcing voltage.
(u) Voh = output high level voltage.
(v) Vol = output low level voltage.
(w) Vout = output forcing voltage.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements in table I, the module is considered to have completed its useful life (see 3.9).

6.3 Module description. The following electrical parameters reflect the -55°C to 85°C end-of-life parameters in table I. Operating power supply voltage range: 4.5 V dc to 5.5 V dc. Module power dissipation: 10.505 W (max); 7.0525 W (typical).



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| CB FCTN B3 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 100 |
| CB FCTN B2 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 100 |
| CB FCTN B1 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 100 |
| CB FCTN B0 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 100 |
| CB WRITE EN | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| IOC SEL 1 | NA | 0.4 | 2.4 | -2.75 | -0.592 | 0.124 | 125 |
| IOC SEL 0 | NA | 0.4 | 2.4 | -2.75 | -0.592 | 0.124 | 125 |
| COMMAND BUSY | NA | 0.4 | 2.4 | -2.75 | -0.592 | 0.124 | 150 |
| COM BUS OR | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| COM BUS ATR | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB ADRS T/O | -1.2 | 0.4 | 2.4 | -0.6 | 0.02 | 0.1 | 75 |
| CB DATA T/O | -1.2 | 0.4 | 2.4 | -0.6 | 0.02 | 0.1 | 75 |
| CB CYCLE ABT | -1.2 | 0.4 | 2.4 | -0.6 | 0.02 | 0.1 | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters - Continued.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| COM BUS DTR | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| COM BUS BUSY | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| SUB BUS GRT | -1.2 | 0.4 | 2.4 | -2.6 | 0.07 | 1.1 | 75 |
| COM BUS GRT | -1.2 | 0.4 | 2.4 | -1.2 | 0.04 | 0.2 | 75 |
| MAE PRESENT | NA | 0.4 | 2.4 | -3.15 | -0.562 | 1.02 | 75 |
| MA CLEAR | -1.2 | 0.4 | 2.4 | -1.2 | 0.04 | 0.2 | 75 |
| COM BUS CLK | -1.2 | 0.4 | 2.4 | -2.0 | 0.05 | 1.0 | 75 |
| NDRO MODE | -1.5 | 0.4 | 2.4 | -0.25 | 0.025 | 1.0 | 75 |
| BOOTSTRAP | -1.5 | 0.4 | 2.4 | -0.25 | 0.025 | 1.0 | 75 |
| MMIO SEL | -1.2 | 0.4 | 2.4 | -1.6 | 0.02 | 0.1 | 75 |
| TEST ENABLE | -1.2 | 0.4 | 2.4 | -1.2 | 0.04 | 0.2 | 125 |
| SAB REQ 0 | NA | 0.4 | 2.4 | -1.75 | -0.592 | 0.124 | 75 |
| SAB REQ 1 | NA | 0.4 | 2.4 | -1.75 | -0.592 | 0.124 | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters – Continued.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| SAB REQ 2 | NA | 0.4 | 2.4 | -1.75 | 0.592 | 0.124 | 75 |
| SAB REQ 3 | NA | 0.4 | 2.4 | -1.75 | 0.592 | 0.124 | 75 |
| SAB DATA 0 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 1 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 2 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 3 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 4 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 5 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 6 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| SAB DATA 7 | NA | 0.4 | 2.4 | -0.25 | 0.07 | NA | 75 |
| CB READ D8 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D9 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D10 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters - Continued.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| CB READ D11 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D12 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D13 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D14 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D15 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D7 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D6 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D5 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D4 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D3 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D2 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D1 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB READ D0 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters - Continued.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| CB PARITY ER | -1.2 | 0.4 | 2.4 | -0.6 | 0.02 | 0.1 | 75 |
| C I INT EN | -1.5 | 0.4 | 2.4 | -0.2 | 0.02 | 0.1 | 75 |
| C II INT EN | -1.5 | 0.4 | 2.4 | -0.2 | 0.02 | 0.1 | 75 |
| C III INT EN | -1.5 | 0.4 | 2.4 | -0.2 | 0.02 | 0.1 | 75 |
| HI CLASS I | NA | 0.4 | 2.4 | -1.4 | -0.587 | 1.02 | 100 |
| HI CLASS II | NA | 0.4 | 2.4 | -1.4 | -0.587 | 1.02 | 100 |
| HI CLASS III | NA | 0.4 | 2.4 | -1.4 | -0.587 | 1.02 | 100 |
| IOC INTRPT | -1.2 | 0.4 | 2.4 | -2.0 | 0.05 | 1.0 | 125 |
| CB A/WR D15 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D14 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D13 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D12 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D11 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.1 Input parameters - Continued.

| Signal | Vic min (V) | Vil max (V) | Vih min (V) | Iil min (mA) | Iih max (mA) | Ibd max (mA) | Cin max (pF) |
|---|---|---|---|---|---|---|---|
| CB A/WR D10 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D9 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D8 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D0 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D1 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D2 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D3 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D4 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D5 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D6 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |
| CB A/WR D7 | NA | 0.4 | 2.4 | -0.65 | 0.07 | NA | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.2 Output parameters.

| Signal | Voh min (V) | Vol max (V) | Ioh max (mA) | Iol max (mA) | Iozh max (mA) | Iozl max (mA) | Ios max (mA) | Cout max (pF) |
|---|---|---|---|---|---|---|---|---|
| CB FCTN B3 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 100 |
| CB FCTN B2 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 100 |
| CB FCTN B1 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 100 |
| CB FCTN B0 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 100 |
| CB WRITE EN | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SUB BUS OR | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |
| COM BUS OR | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| COM BUS ATR | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| COM BUS DTR | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| COM BUS BUSY | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| IOC COM BUSY | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -60.0 | NA |
| SUB BUSREQ 0 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | NA |
| MAE PROTECT | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.2 Output parameters - Continued.

| Signal | Voh min (V) | Vol max (V) | Ioh max (mA) | Iol max (mA) | Iozh max (mA) | Iozl max (mA) | Ios max (mA) | Cout max (pF) |
|---|---|---|---|---|---|---|---|---|
| READ PROTECT | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |
| WR PROTECT | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |
| IOC TO MAE | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |
| CB NDRO STR | 2.4 | 0.5 | -0.4 | 6.0 | 0.05 | 0.05 | -100.0 | NA |
| SAB DATA 0 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 1 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 2 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 3 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 4 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 5 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 6 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB DATA 7 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| EN SAB MAE | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -60.0 | NA |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.2 Output parameters - Continued.

| Signal | Voh min (V) | Vol max (V) | Ioh max (mA) | Iol max (mA) | Iozh max (mA) | Iozl max (mA) | Ios max (mA) | Cout max (pF) |
|---|---|---|---|---|---|---|---|---|
| CB READ D8 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D9 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D10 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D11 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D12 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D13 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D14 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D15 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D7 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D6 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D5 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D4 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D3 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.2 Output parameters - Continued.

| Signal | Voh min (V) | Vol max (V) | Ioh max (mA) | Iol max (mA) | Iozh max (mA) | Iozl max (mA) | Ios max (mA) | Cout max (pF) |
|---|---|---|---|---|---|---|---|---|
| CB READ D2 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D1 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB READ D0 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| HI CI INTR | 2.4 | 0.5 | -0.16 | 1.6 | NA | NA | -30.0 | NA |
| HI CII INTR | 2.4 | 0.5 | -0.16 | 1.6 | NA | NA | -30.0 | NA |
| HI CIII INTR | 2.4 | 0.5 | -0.16 | 1.6 | NA | NA | -30.0 | NA |
| CB A/WR D15 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D14 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D13 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D12 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D11 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D10 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D9 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.2 Output parameters - Continued.

| Signal | Voh min (V) | Vol max (V) | Ioh max (mA) | Iol max (mA) | Iozh max (mA) | Iozl max (mA) | Ios max (mA) | Cout max (pF) |
|---|---|---|---|---|---|---|---|---|
| CB A/WR D8 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D0 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D1 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D2 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D3 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D4 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D5 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D6 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| CB A/WR D7 | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | 75 |
| SAB COMMAND | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -100.0 | NA |
| SAB CLK | 2.4 | 0.5 | -0.4 | 6.0 | NA | NA | -40.0 | NA |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.3 Class I and II dynamic parameters.

| Ref num | Sym | Parameter | Minimum limit | | | Maximum limit | | | Unit | Figs |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | -55°C | 25°C | 85°C | -55°C | 25°C | 85°C | | |
| 1 | tpd | COM BUS CLK to SUB BUSREQ 0 | - | - | - | 1175 | 1175 | 1175 | nS | 11 |
| 2 | tpd | COM BUS CLK to COM BUS ATR | - | - | - | 325 | 325 | 325 | nS | 11 |
| 3 | tpd | COM BUS CLK to COM BUS BUSY | - | - | - | 175 | 175 | 175 | nS | 11 |
| 4 | tpd | COM BUS CLK to COM BUS DTR | - | - | - | 375 | 375 | 375 | nS | 11 |
| 5 | tpd | COM BUS CLK to IOC COM BUSY | - | - | - | 60 | 60 | 60 | nS | 11 |
| 6 | tpd | SUB BUS GRT to EN SAB MAE | - | - | - | 20 | 20 | 20 | nS | 11 |
| 7 | tpd | COM BUS GRT to CB A/WR D15-D0 | - | - | - | 28 | 28 | 28 | nS | 11 |
| 8 | tpd | COM BUS CLK to SAB COMMAND | - | - | - | 45 | 45 | 45 | nS | 11 |
| 9 | tpd | COM BUS CLK to SAB DATA 0-7 | - | - | - | 52 | 52 | 52 | nS | 11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.3.3 Class I and II dynamic parameters - Continued.

| Ref num | Sym | Parameter | Minimum limit | | | Maximum limit | | | Unit | Figs |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | -55°C | 25°C | 85°C | -55°C | 25°C | 85°C | | |
| 10 | tpd | COM BUS CLK to CB READ D0-D4 | - | - | - | 670 | 670 | 670 | nS | 11 |
| 10 | tpd | COM BUS CLK to CB READ D8-D15 | - | - | - | 670 | 670 | 670 | nS | 11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4 Module function. The Common Bus Interface (CBI) acts as a modified version of the AN/UYK-44 Input/Output Controller (IOC). It handles interrupts and generates all of the handshake signals necessary for residency on the AN/UYK-44 common bus. The main functions of the CBI module are command execution, interrupt handling, and completion of all the main memory transactions.

The CBI executes commands similar to an AN/UYK-44 IOC. The Central Processor (CP) sets up a command to be executed in the main memory and then sends the address of the instruction to the CBI via the 74 hexadecimal (hex) instruction. Upon receipt of the address, the CBI sets Command Busy and fetches the command and any required data from memory. The command is then decoded, and the CBI initiates any reads or writes of the Subsystem Adapter Card (SAC), key code GWA, necessary to complete the instruction. Upon completion of the command, the CBI clears Command Busy and continues to monitor the common bus for any further commands.

The CBI is also responsible for monitoring all of its memory transactions for parity, resume or protect errors. On the occurrence of an error, the CBI generates the appropriate interrupt and interrupt vector data necessary for the CP to process the interrupt. In the case of the MIL-STD-1553B channel wishing to interrupt the CP, the SAC forms part of the interrupt vector data and transfers it to the CBI. The CBI then posts an interrupt. Once the interrupt vector data is latched and the interrupt generated, the CBI waits for a master read of the interrupt data by the CP. On occurrence of the read, the CBI checks to see if it is the highest priority and, if it is, transfers the interrupt vector data to the CP.

The third major function of the CBI is the handling of all the main memory references for the MIL-STD-1553B channels. The SAC presents a subsystem request to the CBI; the CBI acknowledges the request by sending a grant code to the SAC. The SAC then sends a function code specifying a memory read or write. In the case of a write, the SAC transfers the address to be written and the corresponding data to the CBI. The CBI completes the memory write on the common bus. For a read, the SAC sends the address and then waits for the CBI to complete the memory read and transfer the data to the SAC.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4.1 Description of I/O pins.

| Signal name | Pin number | I/O | Description |
|---|---|---|---|
| IOC SEL 1 | 8 | I | IOC SEL 1 |
| IOC SEL 0 | 9 | I | IOC SEL 0 |
| COMMAND BUSY | 11 | I | COMMAND BUSY (FROM HP IOC) |
| CB ADRS T/O | 14 | I | COM BUS ADRS TIMEOUT |
| CB DATA T/O | 15 | I | COM BUS DATA TIMEOUT |
| CB CYCLE ABT | 16 | I | COM BUS CYCLE ABORT |
| SUB BUS GRT | 20 | I | SUB BUS GRANT |
| COM BUS GRT | 21 | I | COM BUS GRANT 1 (IOC) |
| MAE PRESENT | 22 | I | MAE PRESENT |
| MA CLEAR | 23 | I | MA CLR |
| COM BUS CLK | 26 | I | COM BUS CLK (6) |
| NDRO MODE | 32 | I | NDRO BIT MODE |
| BOOTSTRAP | 33 | I | BOOTSTRAP PRESENT |
| MMIO SEL | 34 | I | MMIO N COMP SEL |
| TEST ENABLE | 35 | I | TEST ENABLE |
| SAB REQ 0 | 37 | I | SAB REQUEST 0 |
| SAB REQ 1 | 38 | I | SAB REQUEST 1 |
| SAB REQ 2 | 39 | I | SAB REQUEST 2 |
| SAB REQ 3 | 41 | I | SAB REQUEST 3 |
| CB PARITY ER | 69 | I | COM BUS PARITY ERROR |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4.1 Description of I/O pins - Continued.

| Signal name | Pin number | I/O | Description |
|---|---|---|---|
| C I INT EN | 70 | I | CP CLASS I INTRPT ENBL |
| C II INT EN | 71 | I | CP CLASS II INTRPT ENBL |
| C III INT EN | 72 | I | CP CLASS III INTRPT ENBL |
| HI CLASS I | 73 | I | HIGHER CLASS I |
| HI CLASS II | 74 | I | HIGHER CLASS II |
| HI CLASS III | 76 | I | HIGHER CLASS III |
| IOC INTRPT | 80 | I | INHIBIT IOC INTRPT UPDATE |
| CB FCTN B3 | 2 | I/O | COM BUS FUNCTION BIT 3 |
| CB FCTN B2 | 3 | I/O | COM BUS FUNCTION BIT 2 |
| CB FCTN B1 | 4 | I/O | COM BUS FUNCTION BIT 1 |
| CB FCTN B0 | 5 | I/O | COM BUS FUNCTION BIT 0 |
| CB WRITE EN | 6 | I/O | COM BUS WRITE ENBL |
| COM BUS OR | 12 | I/O | COM BUS OR |
| COM BUS ATR | 13 | I/O | COM BUS ATR |
| COM BUS DTR | 17 | I/O | COM BUS DTR |
| COM BUS BUSY | 18 | I/O | COM BUS BUSY |
| SAB DATA 0 | 42 | I/O | SAB DATA 0 |
| SAB DATA 1 | 43 | I/O | SAB DATA 1 |
| SAB DATA 2 | 44 | I/O | SAB DATA 2 |
| SAB DATA 3 | 45 | I/O | SAB DATA 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4.1 Description of I/O pins - Continued.

| Signal name | Pin number | I/O | Description |
|---|---|---|---|
| SAB DATA 4 | 46 | I/O | SAB DATA 4 |
| SAB DATA 5 | 47 | I/O | SAB DATA 5 |
| SAB DATA 6 | 48 | I/O | SAB DATA 6 |
| SAB DATA 7 | 49 | I/O | SAB DATA 7 |
| CB READ D8 | 52 | I/O | COM BUS READ DATA BIT 8 |
| CB READ D9 | 53 | I/O | COM BUS READ DATA BIT 9 |
| CB READ D10 | 54 | I/O | COM BUS READ DATA BIT 10 |
| CB READ D11 | 55 | I/O | COM BUS READ DATA BIT 11 |
| CB READ D12 | 56 | I/O | COM BUS READ DATA BIT 12 |
| CB READ D13 | 57 | I/O | COM BUS READ DATA BIT 13 |
| CB READ D14 | 58 | I/O | COM BUS READ DATA BIT 14 |
| CB READ D15 | 59 | I/O | COM BUS READ DATA BIT 15 |
| CB READ D7 | 61 | I/O | COM BUS READ DATA BIT 7 |
| CB READ D6 | 62 | I/O | COM BUS READ DATA BIT 6 |
| CB READ D5 | 63 | I/O | COM BUS READ DATA BIT 5 |
| CB READ D4 | 64 | I/O | COM BUS READ DATA BIT 4 |
| CB READ D3 | 65 | I/O | COM BUS READ DATA BIT 3 |
| CB READ D2 | 66 | I/O | COM BUS READ DATA BIT 2 |
| CB READ D1 | 67 | I/O | COM BUS READ DATA BIT 1 |
| CB READ D0 | 68 | I/O | COM BUS READ DATA BIT 0 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4.1 Description of I/O pins - Continued.

| Signal name | Pin number | I/O | Description |
|---|---|---|---|
| CB A/WR D15 | 82 | I/O | COM BUS ADRS/WR DATA BIT 15 |
| CB A/WR D14 | 83 | I/O | COM BUS ADRS/WR DATA BIT 14 |
| CB A/WR D13 | 84 | I/O | COM BUS ADRS/WR DATA BIT 13 |
| CB A/WR D12 | 85 | I/O | COM BUS ADRS/WR DATA BIT 12 |
| CB A/WR D11 | 86 | I/O | COM BUS ADRS/WR DATA BIT 11 |
| CB A/WR D10 | 87 | I/O | COM BUS ADRS/WR DATA BIT 10 |
| CB A/WR D9 | 88 | I/O | COM BUS ADRS/WR DATA BIT 9 |
| CB A/WR D8 | 89 | I/O | COM BUS ADRS/WR DATA BIT 8 |
| CB A/WR D0 | 91 | I/O | COM BUS ADRS/WR DATA BIT 0 |
| CB A/WR D1 | 92 | I/O | COM BUS ADRS/WR DATA BIT 1 |
| CB A/WR D2 | 93 | I/O | COM BUS ADRS/WR DATA BIT 2 |
| CB A/WR D3 | 94 | I/O | COM BUS ADRS/WR DATA BIT 3 |
| CB A/WR D4 | 95 | I/O | COM BUS ADRS/WR DATA BIT 4 |
| CB A/WR D5 | 96 | I/O | COM BUS ADRS/WR DATA BIT 5 |
| CB A/WR D6 | 97 | I/O | COM BUS ADRS/WR DATA BIT 6 |
| CB A/WR D7 | 98 | I/O | COM BUS ADRS/WR DATA BIT 7 |
| SUB BUS OR | 7 | O | SUB BUS OR |
| IOC COM BUSY | 19 | O | IOC COMMAND BUSY |
| SUB BUSREQ 0 | 24 | O | SUB BUS REQUEST 0 |
| MAE PROTECT | 27 | O | MAE EXECUTE PROTECT |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.4.1 Description of I/O pins - Continued.

| Signal name | Pin number | I/O | Description |
|---|---|---|---|
| READ PROTECT | 28 | O | READ PROTECT |
| WR PROTECT | 29 | O | WRITE PROTECT |
| IOC TO MAE | 30 | O | IOC WRITE TO MAE PAGE RGTR |
| CB NDRO STR | 36 | O | COM BUS NDRO STRAP |
| EN SAB MAE | 50 | O | ENBL SAB MAE BUFFER |
| HI CI INTR | 77 | O | HIGHER CLASS I INTRPT |
| HI CII INTR | 78 | O | HIGHER CLASS II INTRPT |
| HI CIII INTR | 79 | O | HIGHER CLASS III INTRPT |
| SAB COMMAND | 99 | O | SAB COMMAND |
| SAB CLK | 100 | O | SAB CLK |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

6.5 Functional test vectors. Functional test vectors are not printed herein because of their extreme length; and, even when presented as a hard copy, they require conversion to on-line format. When the entire sequence of vector groups is needed for driving devices as part of inspection, a test program output should be generated in a form compatible with test system architecture (magnetic tape format usually preferred). For reference purposes, the Naval Weapons Support Center (Code 607) maintains a limited quantity of dated, hard copy printouts of the functional test vectors and these may be obtained upon request.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - SH

(Project 5963-0262)

Agent: NW



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE II. Isolation test.

| Test cond | Test description | Connect A to pin | Connect B to pin | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| A | Isolation | C | Frame | 10 | INF | MOhm | 1-8 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Isolation test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Megohm bridge voltage | 100 V | ± 10 percent | A |
| Isolation measurement | NA | ± 500 KOhm | A |

2. The ohmmeter used shall be item R06.

3. In the set-up conditions in table II, 'A' shall correspond to the positive terminal of the megohm bridge, 'B' shall correspond to the negative terminal and 'C' shall correspond to all used pins shorted together.

4. Warning: When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "DISCHARGE" before connecting or disconnecting the test leads.

5. When testing for frame isolation, penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal of the megohm bridge.

6. Caution: Set megohm bridge to limit current to 10 uA before applying voltage to the module.

7. The test circuit shall be as indicated on figure 6.

8. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

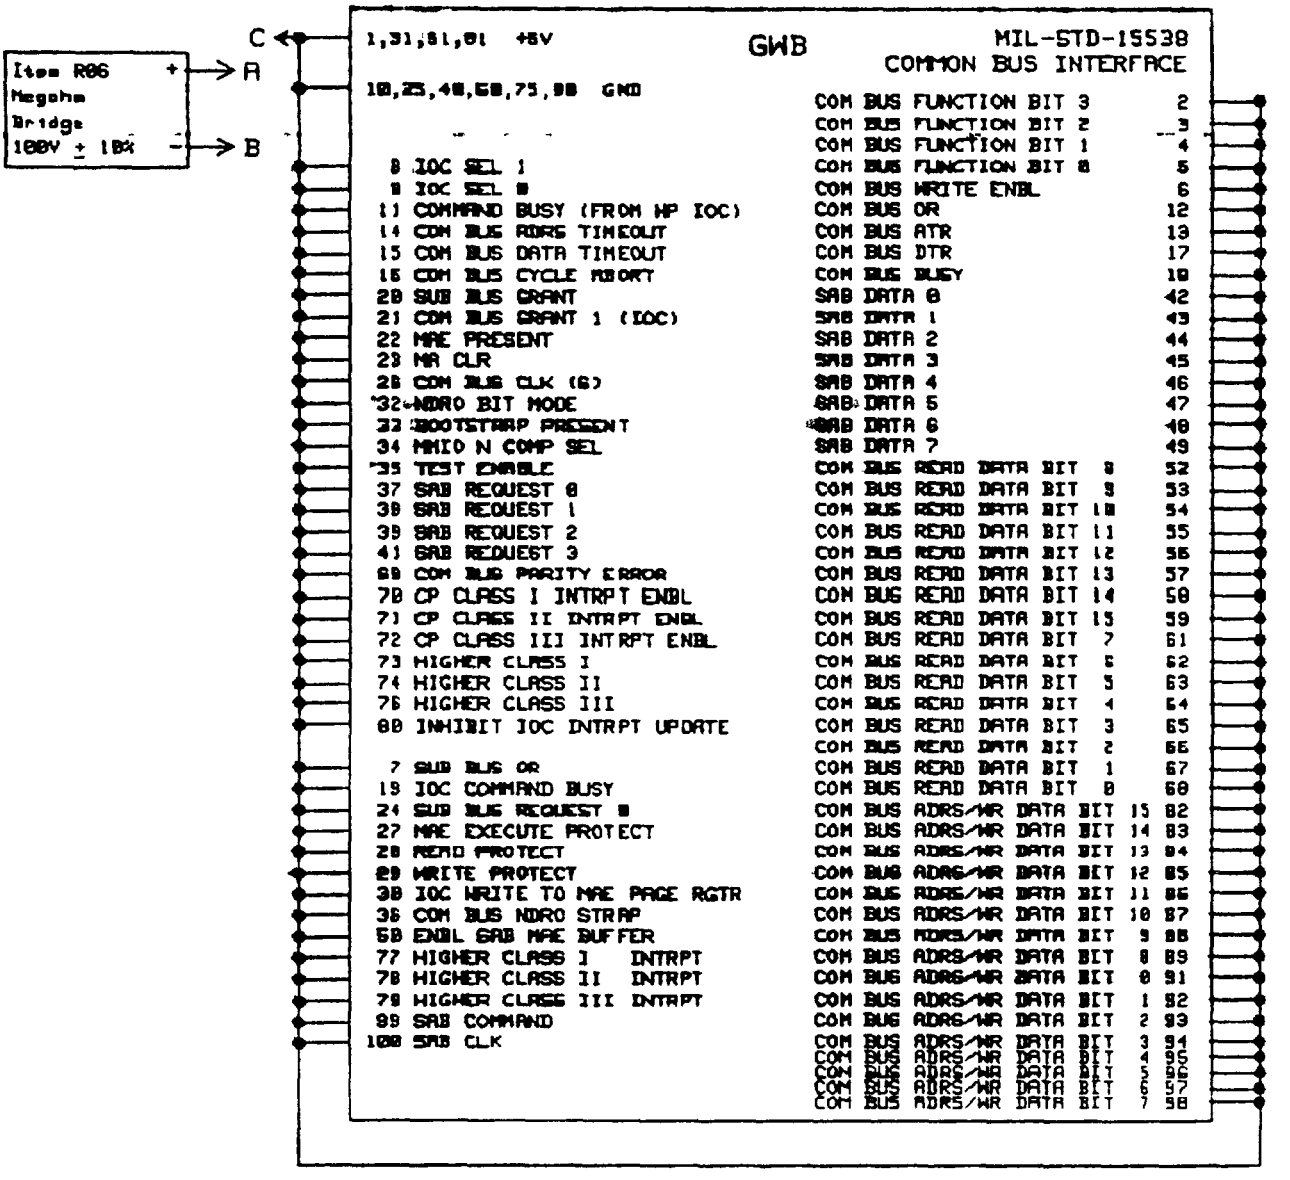



FIGURE 6. Isolation test circuit for table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE III. Continuity test.

| Test cond | Test description | Connect A to pin | Connect B to pin | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| B1 | Continuity, GND | 10 | 25 | 0 | 1 | Ohm | 1-5 |
| B2 | Continuity, GND | 10 | 40 | | | | |
| B3 | Continuity, GND | 60 | 75 | | | | |
| B4 | Continuity, GND | 60 | 90 | | | | |
| B5 | Continuity, Vcc | 1 | 31 | | | | |
| B6 | Continuity, Vcc | 51 | 81 | 0 | 1 | Ohm | 1-5 |

NOTES:

1. Continuity test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Continuity measurement | NA | ± 0.05 Ohm | B1-B6 |

2. The ohmmeter used shall be item R07.


3. In the set-up conditions in table III, 'A' shall correspond to the positive terminal of the ohmmeter, and 'B' shall correspond to the negative terminal.

4. The test circuit shall be as indicated on figure 7.

5. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.




| | | | |
|---|---|---|---|
| 1,31,51,81 +5V | GWB | MIL-STD-1553B COMMON BUS INTERFACE | |
| 10,25,40,60,75,90 GND | | COM BUS FUNCTION BIT 3 | 2 |
| | | COM BUS FUNCTION BIT 2 | 3 |
| | | COM BUS FUNCTION BIT 1 | 4 |
| 8 IOC SEL 1 | | COM BUS FUNCTION BIT 0 | 5 |
| 9 IOC SEL 0 | | COM BUS WRITE ENBL | 6 |
| 11 COMMAND BUSY (FROM HP IOC) | | COM BUS OR | 12 |
| 14 COM BUS ADRS TIMEOUT | | COM BUS ATR | 13 |
| 15 COM BUS DATA TIMEOUT | | COM BUS DTR | 17 |
| 16 COM BUS CYCLE ABORT | | COM BUS BUSY | 18 |
| 20 SUB BUS GRANT | | SAB DATA 0 | 42 |
| 21 COM BUS GRANT 1 (IOC) | | SAB DATA 1 | 43 |
| 22 MAE PRESENT | | SAB DATA 2 | 44 |
| 23 MA CLR | | SAB DATA 3 | 45 |
| 26 COM BUS CLK (6) | | SAB DATA 4 | 46 |
| 32 NDRO BIT MODE | | SAB DATA 5 | 47 |
| 33 BOOTSTRAP PRESENT | | SAB DATA 6 | 48 |
| 34 MMIO N COMP SEL | | SAB DATA 7 | 49 |
| 35 TEST ENABLE | | COM BUS READ DATA BIT 8 | 52 |
| 37 SAB REQUEST 0 | | COM BUS READ DATA BIT 9 | 53 |
| 38 SAB REQUEST 1 | | COM BUS READ DATA BIT 10 | 54 |
| 39 SAB REQUEST 2 | | COM BUS READ DATA BIT 11 | 55 |
| 41 SAB REQUEST 3 | | COM BUS READ DATA BIT 12 | 56 |
| 69 COM BUS PARITY ERROR | | COM BUS READ DATA BIT 13 | 57 |
| 70 CP CLASS I INTRPT ENBL | | COM BUS READ DATA BIT 14 | 58 |
| 71 CP CLASS II INTRPT ENBL | | COM BUS READ DATA BIT 15 | 59 |
| 72 CP CLASS III INTRPT ENBL | | COM BUS READ DATA BIT 7 | 61 |
| 73 HIGHER CLASS I | | COM BUS READ DATA BIT 6 | 62 |
| 74 HIGHER CLASS II | | COM BUS READ DATA BIT 5 | 63 |
| 76 HIGHER CLASS III | | COM BUS READ DATA BIT 4 | 64 |
| 80 INHIBIT IOC INTRPT UPDATE | | COM BUS READ DATA BIT 3 | 65 |
| | | COM BUS READ DATA BIT 2 | 66 |
| 7 SUB BUS OR | | COM BUS READ DATA BIT 1 | 67 |
| 19 IOC COMMAND BUSY | | COM BUS READ DATA BIT 0 | 68 |
| 24 SUB BUS REQUEST 0 | | COM BUS ADRS/WR DATA BIT 15 | 82 |
| 27 MAE EXECUTE PROTECT | | COM BUS ADRS/WR DATA BIT 14 | 83 |
| 28 READ PROTECT | | COM BUS ADRS/WR DATA BIT 13 | 84 |
| 29 WRITE PROTECT | | COM BUS ADRS/WR DATA BIT 12 | 85 |
| 30 IOC WRITE TO MAE PAGE RGTR | | COM BUS ADRS/WR DATA BIT 11 | 86 |
| 36 COM BUS NDRO STRAP | | COM BUS ADRS/WR DATA BIT 10 | 87 |
| 58 ENBL SAB MAE BUFFER | | COM BUS ADRS/WR DATA BIT 9 | 88 |
| 77 HIGHER CLASS I INTRPT | | COM BUS ADRS/WR DATA BIT 8 | 89 |
| 78 HIGHER CLASS II INTRPT | | COM BUS ADRS/WR DATA BIT 0 | 91 |
| 79 HIGHER CLASS III INTRPT | | COM BUS ADRS/WR DATA BIT 1 | 92 |
| 99 SAB COMMAND | | COM BUS ADRS/WR DATA BIT 2 | 93 |
| 100 SAB CLK | | COM BUS ADRS/WR DATA BIT 3 | 94 |
| | | COM BUS ADRS/WR DATA BIT 4 | 95 |
| | | COM BUS ADRS/WR DATA BIT 5 | 96 |
| | | COM BUS ADRS/WR DATA BIT 6 | 97 |
| | | COM BUS ADRS/WR DATA BIT 7 | 98 |

FIGURE 7. Continuity test circuit for table III.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE IV. Power supply stress test.

| Test cond | Power supply | Vin (V) | Connect | | 25 ± 5°C Initial limits | Notes |
|---|---|---|---|---|---|---|
| | | | Positive lead to | Negative lead to | | |
| C | Vcc | 7.0 | 1,31,51, 81 | 10,25, 40,60, 75,90 | Module shall pass all remaining tests. | 1-6 |

NOTES:

1. Power supply stress test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 7.0 V | +0 mV,-70 mV | C |
| Power supply current limit | 3.438 A | NA | C |

2. There shall be no power supply voltage overshoot on this test.

3. Connect the power supplies to the module as indicated in table IV.

4. When performing the power supply stress test, no measurements are taken. This condition shall be maintained for a minimum of 5 seconds.

5. The test circuit shall be as indicated on figure 8.

6. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

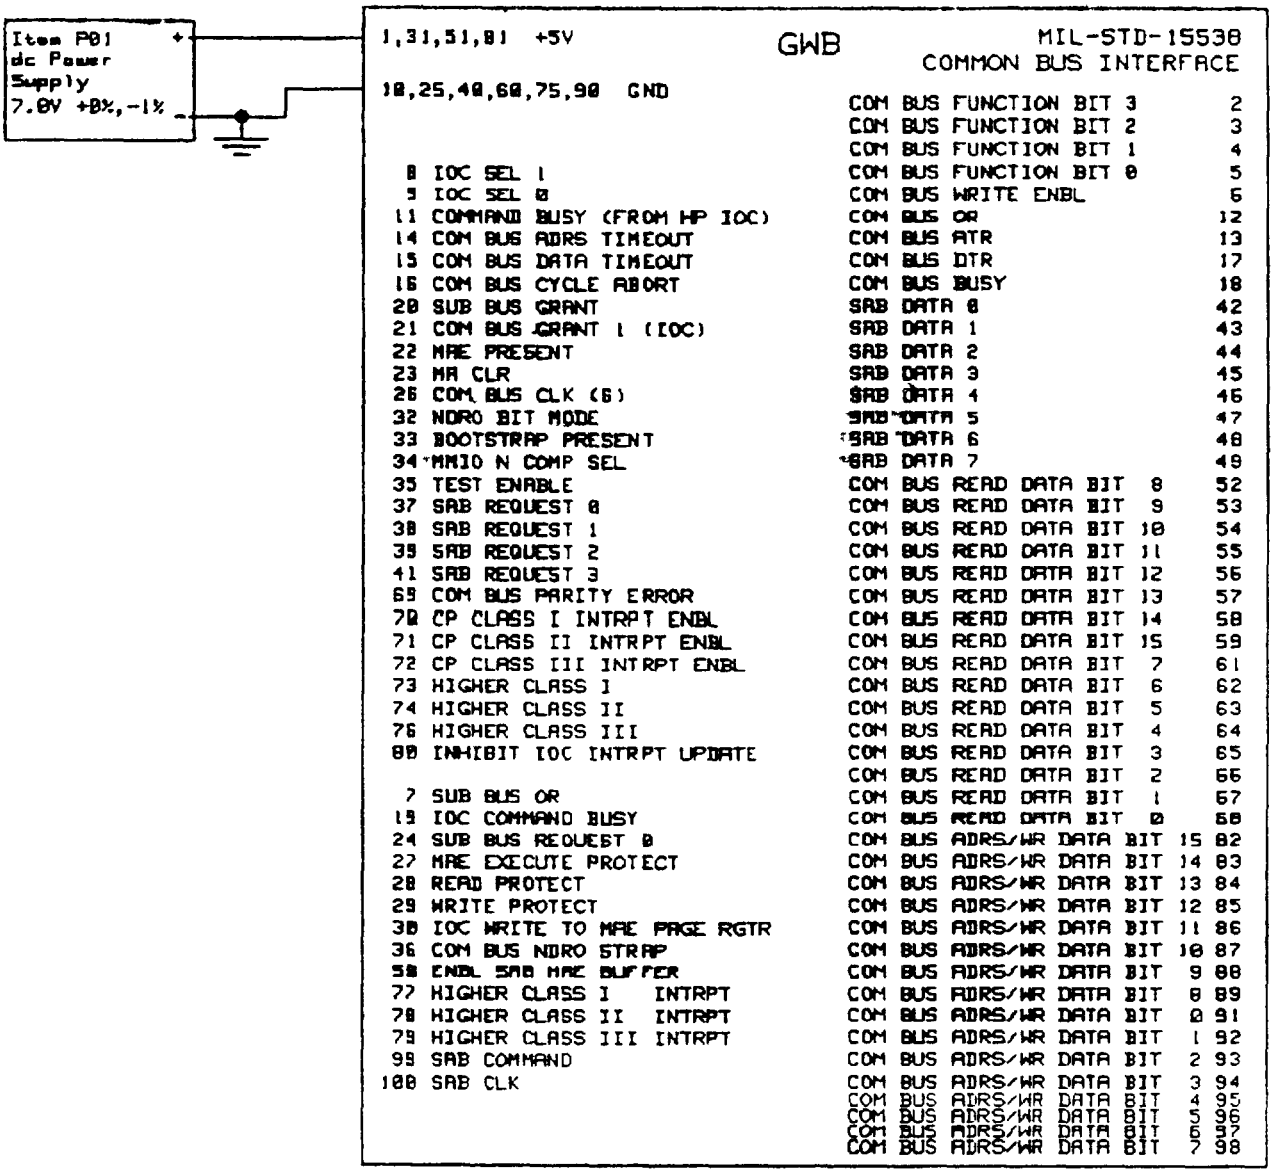



FIGURE 8. Vcc stress test circuit for table IV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test.

| Test cond | Signal name | Pin no. | Vin (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| D1 | IOC SEL 1 | 8 | 5.5 | -0.024 | 0.124 | mA | 1-3 |
| D2 | IOC SEL 0 | 9 | | | | | |
| D3 | COMMAND BUSY | 11 | 5.5 | -0.024 | 0.124 | mA | 1-3 |
| D4 | CB ADRS T/O | 14 | 5.5 | 0.0 | 0.1 | mA | 1-3 |
| D5 | CB DATA T/O | 15 | | | | | |
| D6 | CB CYCLE ABT | 16 | 5.5 | 0.0 | 0.1 | mA | 1-3 |
| D7 | SUB BUS GRT | 20 | 5.5 | 0.0 | 1.1 | mA | 1-3 |
| D8 | COM BUS GRT | 21 | 5.5 | 0.0 | 0.2 | mA | 1-3 |
| D9 | MAE PRESENT | 22 | 5.5 | -0.024 | 1.02 | mA | 1-3 |
| D10 | MA CLEAR | 23 | 5.5 | 0.0 | 0.2 | mA | 1-3 |
| D11 | COM BUS CLK | 26 | 5.5 | 0.0 | 1.0 | mA | 1-3 |
| D12 | NDRO MODE | 32 | | | | | |
| D13 | BOOTSTRAP | 33 | 5.5 | 0.0 | 1.0 | mA | 1-3 |
| D14 | MMIO SEL | 34 | 5.5 | 0.0 | 0.1 | mA | 1-3 |
| D15 | TEST ENABLE | 35 | 5.5 | 0.0 | 0.2 | mA | 1-3 |
| D16 | SAB REQ 0 | 37 | 5.5 | -0.024 | 0.124 | mA | 1-3 |
| D17 | SAB REQ 1 | 38 | | | | | |
| D18 | SAB REQ 2 | 39 | | | | | |
| D19 | SAB REQ 3 | 41 | 5.5 | -0.024 | 0.124 | mA | 1-3 |
| D20 | CB PARITY ER | 69 | 5.5 | 0.0 | 0.1 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.

| Test cond | Signal name | Pin no. | Vin (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| D21 | C I INT EN | 70 | 5.5 | 0.0 | 0.1 | mA | 1-3 |
| D22 | C II INT EN | 71 | | | | | |
| D23 | C III INT EN | 72 | 5.5 | 0.0 | 0.1 | mA | 1-3 |
| D24 | HI CLASS I | 73 | 5.5 | -0.024 | 1.02 | mA | 1-3 |
| D25 | HI CLASS II | 74 | | | | | |
| D26 | HI CLASS III | 76 | 5.5 | -0.024 | 1.02 | mA | 1-3 |
| D27 | IOC INTRPT | 80 | 5.5 | 0.0 | 1.0 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input breakdown current test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | D1-D27 |
| Power supply current limit | 2.86 A | NA | D1-D27 |
| Forcing voltage, (Vin) | 5.5 V | ± 55 mV | D1-D27 |
| Pattern voltage | | | |
| high, (VH) | 3.0 V | ± 100 mV | D1-D27 |
| low, (VL) | 0.0 V | ± 100 mV | D1-D27 |
| Input current measurement | NA | ± 7.4 uA | D1-D3 |
| | NA | ± 5.0 uA | D4-D6 |
| | NA | ± 55.0 uA | D7 |
| | NA | ± 10.0 uA | D8 |
| | NA | ± 52.2 uA | D9 |
| | NA | ± 10.0 uA | D10 |
| | NA | ± 50.0 uA | D11-D13 |
| | NA | ± 5.0 uA | D14 |
| | NA | ± 10.0 uA | D15 |
| | NA | ± 7.4 uA | D16-D19 |
| | NA | ± 5.0 uA | D20-D23 |
| | NA | ± 52.2 uA | D24-D26 |
| | NA | ± 50.0 uA | D27 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table V and the current then measured. The forcing voltage overshoot shall not exceed 100 mV.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test.

| Test cond | Signal name | Pin no. | Vout (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| E1 | CB FCTN B3 | 2 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E2 | CB FCTN B2 | 3 | | | | | |
| E3 | CB FCTN B1 | 4 | | | | | |
| E4 | CB FCTN B0 | 5 | | | | | |
| E5 | CB WRITE EN | 6 | | | | | |
| E6 | SUB BUS OR | 7 | | | | | |
| E7 | COM BUS OR | 12 | | | | | |
| E8 | COM BUS ATR | 13 | | | | | |
| E9 | COM BUS DTR | 17 | | | | | |
| E10 | COM BUS BUSY | 18 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E11 | IOC COM BUSY | 19 | 0.0 | -150.0 | -60.0 | mA | 1-4 |
| E12 | SUB BUSREQ 0 | 24 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E13 | MAE PROTECT | 27 | | | | | |
| E14 | READ PROTECT | 28 | | | | | |
| E15 | WR PROTECT | 29 | | | | | |
| E16 | IOC TO MAE | 30 | | | | | |
| E17 | CB NDRO STR | 36 | | | | | |
| E18 | SAB DATA 0 | 42 | | | | | |
| E19 | SAB DATA 1 | 43 | | | | | |
| E20 | SAB DATA 2 | 44 | 0.0 | -325.0 | -100.0 | mA | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

| Test cond | Signal name | Pin no. | Vout (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| E21 | SAB DATA 3 | 45 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E22 | SAB DATA 4 | 46 | | | | | |
| E23 | SAB DATA 5 | 47 | | | | | |
| E24 | SAB DATA 6 | 48 | | | | | |
| E25 | SAB DATA 7 | 49 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E26 | EN SAB MAE | 50 | 0.0 | -150.0 | -60.0 | mA | 1-4 |
| E27 | CB READ D8 | 52 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E28 | CB READ D9 | 53 | | | | | |
| E29 | CB READ D10 | 54 | | | | | |
| E30 | CB READ D11 | 55 | | | | | |
| E31 | CB READ D12 | 56 | | | | | |
| E32 | CB READ D13 | 57 | | | | | |
| E33 | CB READ D14 | 58 | | | | | |
| E34 | CB READ D15 | 59 | | | | | |
| E35 | CB READ D7 | 61 | | | | | |
| E36 | CB READ D6 | 62 | | | | | |
| E37 | CB READ D5 | 63 | | | | | |
| E38 | CB READ D4 | 64 | | | | | |
| E39 | CB READ D3 | 65 | | | | | |
| E40 | CB READ D2 | 66 | 0.0 | -325.0 | -100.0 | mA | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

| Test cond | Signal name | Pin no. | Vout (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| E41 | CB READ D1 | 67 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E42 | CB READ D0 | 68 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E43 | HI CI INTR | 77 | 0.0 | -130.0 | -30.0 | mA | 1-4 |
| E44 | HI CII INTR | 78 | | | | | |
| E45 | HI CIII INTR | 79 | 0.0 | -130.0 | -30.0 | mA | 1-4 |
| E46 | CB A/WR D15 | 82 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E47 | CB A/WR D14 | 83 | | | | | |
| E48 | CB A/WR D13 | 84 | | | | | |
| E49 | CB A/WR D12 | 85 | | | | | |
| E50 | CB A/WR D11 | 86 | | | | | |
| E51 | CB A/WR D10 | 87 | | | | | |
| E52 | CB A/WR D9 | 88 | | | | | |
| E53 | CB A/WR D8 | 89 | | | | | |
| E54 | CB A/WR D0 | 91 | | | | | |
| E55 | CB A/WR D1 | 92 | | | | | |
| E56 | CB A/WR D2 | 93 | | | | | |
| E57 | CB A/WR D3 | 94 | | | | | |
| E58 | CB A/WR D4 | 95 | | | | | |
| E59 | CB A/WR D5 | 96 | | | | | |
| E60 | CB A/WR D6 | 97 | 0.0 | -325.0 | -100.0 | mA | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

| Test cond | Signal name | Pin no. | Vout (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| E61 | CB A/WR D7 | 98 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E62 | SAB COMMAND | 99 | 0.0 | -325.0 | -100.0 | mA | 1-4 |
| E63 | SAB CLK | 100 | 0.0 | -100.0 | -40.0 | mA | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Output short circuit current test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | E1-E63 |
| Power supply current limit | 2.86 A | NA | E1-E63 |
| Forcing voltage, (Vout) | 0.0 V | ± 50 mV | E1-E63 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>3.0 V<br>0.0 V | <br>± 100 mV<br>± 100 mV | <br>E1-E63<br>E1-E63 |
| Output current measurement | NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA | ± 11.2 mA<br>± 4.5 mA<br>± 11.2 mA<br>± 4.5 mA<br>± 11.2 mA<br>± 5.0 mA<br>± 11.2 mA<br>± 3.0 mA | E1-E10<br>E11<br>E12-E25<br>E26<br>E27-E42<br>E43-E45<br>E46-E62<br>E63 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table VI and the current then measured. The forcing voltage undershoot shall not exceed 100 mV.

3. When performing this test, only one output shall be tested at a time, and the duration of momentarily grounding each output shall not exceed 1 second.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VII. Input current, high level, test.

| Test cond | Signal name | Pin no. | Vih (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| F1 | CB FCTN B3 | 2 | 2.4 | -0.25 | 0.07 | mA | 1-3 |
| F2 | CB FCTN B2 | 3 | | | | | |
| F3 | CB FCTN B1 | 4 | | | | | |
| F4 | CB FCTN B0 | 5 | | | | | |
| F5 | CB WRITE EN | 6 | 2.4 | -0.25 | 0.07 | mA | 1-3 |
| F6 | IOC SEL 1 | 8 | 2.4 | -2.75 | -0.592 | mA | 1-3 |
| F7 | IOC SEL 0 | 9 | | | | | |
| F8 | COMMAND BUSY | 11 | 2.4 | -2.75 | -0.592 | mA | 1-3 |
| F9 | COM BUS OR | 12 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F10 | COM BUS ATR | 13 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F11 | CB ADRS T/O | 14 | 2.4 | -0.6 | 0.02 | mA | 1-3 |
| F12 | CB DATA T/O | 15 | | | | | |
| F13 | CB CYCLE ABT | 16 | 2.4 | -0.6 | 0.02 | mA | 1-3 |
| F14 | COM BUS DTR | 17 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F15 | COM BUS BUSY | 18 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F16 | SUB BUS GRT | 20 | 2.4 | -2.6 | 0.07 | mA | 1-3 |
| F17 | COM BUS GRT | 21 | 2.4 | -1.2 | 0.04 | mA | 1-3 |
| F18 | MAE PRESENT | 22 | 2.4 | -3.15 | -0.562 | mA | 1-3 |
| F19 | MA CLEAR | 23 | 2.4 | -1.2 | 0.04 | mA | 1-3 |
| F20 | COM BUS CLK | 26 | 2.4 | -2.0 | 0.05 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VII. Input current, high level, test - Continued.

| Test cond | Signal name | Pin no. | Vih (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| F21 | NDRO MODE | 32 | 2.4 | -0.25 | 0.025 | mA | 1-3 |
| F22 | BOOTSTRAP | 33 | 2.4 | -0.25 | 0.025 | mA | 1-3 |
| F23 | MMIO SEL | 34 | 2.4 | -1.6 | 0.02 | mA | 1-3 |
| F24 | TEST ENABLE | 35 | 2.4 | -1.2 | 0.04 | mA | 1-3 |
| F25 | SAB REQ 0 | 37 | 2.4 | -1.75 | -0.592 | mA | 1-3 |
| F26 | SAB REQ 1 | 38 | | | | | |
| F27 | SAB REQ 2 | 39 | | | | | |
| F28 | SAB REQ 3 | 41 | 2.4 | -1.75 | -0.592 | mA | 1-3 |
| F29 | SAB DATA 0 | 42 | 2.4 | -0.25 | 0.07 | mA | 1-3 |
| F30 | SAB DATA 1 | 43 | | | | | |
| F31 | SAB DATA 2 | 44 | | | | | |
| F32 | SAB DATA 3 | 45 | | | | | |
| F33 | SAB DATA 4 | 46 | | | | | |
| F34 | SAB DATA 5 | 47 | | | | | |
| F35 | SAB DATA 6 | 48 | | | | | |
| F36 | SAB DATA 7 | 49 | 2.4 | -0.25 | 0.07 | mA | 1-3 |
| F37 | CB READ D8 | 52 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F38 | CB READ D9 | 53 | | | | | |
| F39 | CB READ D10 | 54 | | | | | |
| F40 | CB READ D11 | 55 | 2.4 | -0.65 | 0.07 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VII. Input current, high level, test - Continued.

| Test cond | Signal name | Pin no. | Vih (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| F41 | CB READ D12 | 56 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F42 | CB READ D13 | 57 | | | | | |
| F43 | CB READ D14 | 58 | | | | | |
| F44 | CB READ D15 | 59 | | | | | |
| F45 | CB READ D7 | 61 | | | | | |
| F46 | CB READ D6 | 62 | | | | | |
| F47 | CB READ D5 | 63 | | | | | |
| F48 | CB READ D4 | 64 | | | | | |
| F49 | CB READ D3 | 65 | | | | | |
| F50 | CB READ D2 | 66 | | | | | |
| F51 | CB READ D1 | 67 | | | | | |
| F52 | CB READ D0 | 68 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F53 | CB PARITY ER | 69 | 2.4 | -0.6 | 0.02 | mA | 1-3 |
| F54 | C I INT EN | 70 | 2.4 | -0.2 | 0.02 | mA | 1-3 |
| F55 | C II INT EN | 71 | | | | | |
| F56 | C III INT EN | 72 | 2.4 | -0.2 | 0.02 | mA | 1-3 |
| F57 | HI CLASS I | 73 | 2.4 | -1.4 | -0.587 | mA | 1-3 |
| F58 | HI CLASS II | 74 | | | | | |
| F59 | HI CLASS III | 76 | 2.4 | -1.4 | -0.587 | mA | 1-3 |
| F60 | IOC INTRPT | 80 | 2.4 | -2.0 | 0.05 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VII. Input current, high level, test - Continued.

| Test cond | Signal name | Pin no. | Vih (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| F61 | CB A/WR D15 | 82 | 2.4 | -0.65 | 0.07 | mA | 1-3 |
| F62 | CB A/WR D14 | 83 | | | | | |
| F63 | CB A/WR D13 | 84 | | | | | |
| F64 | CB A/WR D12 | 85 | | | | | |
| F65 | CB A/WR D11 | 86 | | | | | |
| F66 | CB A/WR D10 | 87 | | | | | |
| F67 | CB A/WR D9 | 88 | | | | | |
| F68 | CB A/WR D8 | 89 | | | | | |
| F69 | CB A/WR D0 | 91 | | | | | |
| F70 | CB A/WR D1 | 92 | | | | | |
| F71 | CB A/WR D2 | 93 | | | | | |
| F72 | CB A/WR D3 | 94 | | | | | |
| F73 | CB A/WR D4 | 95 | | | | | |
| F74 | CB A/WR D5 | 96 | | | | | |
| F75 | CB A/WR D6 | 97 | | | | | |
| F76 | CB A/WR D7 | 98 | 2.4 | -0.65 | 0.07 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input current, high level, test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | F1-F76 |
| Power supply current limit | 2.86 A | NA | F1-F76 |
| Forcing voltage, (Vih) | 2.4 V | ± 50 mV | F1-F76 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>3.0 V<br>0.0 V | <br>± 100 mV<br>± 100 mV | <br>F1-F76<br>F1-F76 |
| Input current measurement | NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA<br>NA | ± 16.0 uA<br>± 107.9 uA<br>± 36.0 uA<br>± 31.0 uA<br>± 36.0 uA<br>± 133.0 uA<br>± 62.0 uA<br>± 129.4 uA<br>± 62.0 uA<br>± 102.0 uA<br>± 13.7 uA<br>± 81.0 uA<br>± 62.0 uA<br>± 57.9 uA<br>± 16.0 uA<br>± 36.0 uA<br>± 31.0 uA<br>± 11.0 uA<br>± 40.7 uA<br>± 102.0 uA<br>± 36.0 uA | F1-F5<br>F6-F8<br>F9,F10<br>F11-F13<br>F14,F15<br>F16<br>F17<br>F18<br>F19<br>F20<br>F21,F22<br>F23<br>F24<br>F25-F28<br>F29-F36<br>F37-F52<br>F53<br>F54-F56<br>F57-F59<br>F60<br>F61-F76 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table VII and the current then measured. The forcing voltage overshoot shall not exceed 100 mV.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VIII. Input current, low level, test.

| Test cond | Signal name | Pin no. | Vil (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| G1 | CB FCTN B3 | 2 | 0.4 | -0.25 | 0.07 | mA | 1-3 |
| G2 | CB FCTN B2 | 3 | | | | | |
| G3 | CB FCTN B1 | 4 | | | | | |
| G4 | CB FCTN B0 | 5 | | | | | |
| G5 | CB WRITE EN | 6 | 0.4 | -0.25 | 0.07 | mA | 1-3 |
| G6 | IOC SEL 1 | 8 | 0.4 | -2.75 | -0.592 | mA | 1-3 |
| G7 | IOC SEL 0 | 9 | | | | | |
| G8 | COMMAND BUSY | 11 | 0.4 | -2.75 | -0.592 | mA | 1-3 |
| G9 | COM BUS OR | 12 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G10 | COM BUS ATR | 13 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G11 | CB ADRS T/O | 14 | 0.4 | -0.6 | 0.02 | mA | 1-3 |
| G12 | CB DATA T/O | 15 | | | | | |
| G13 | CB CYCLE ABT | 16 | 0.4 | -0.6 | 0.02 | mA | 1-3 |
| G14 | COM BUS DTR | 17 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G15 | COM BUS BUSY | 18 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G16 | SUB BUS GRT | 20 | 0.4 | -2.6 | 0.07 | mA | 1-3 |
| G17 | COM BUS GRT | 21 | 0.4 | -1.2 | 0.04 | mA | 1-3 |
| G18 | MAE PRESENT | 22 | 0.4 | -3.15 | -0.562 | mA | 1-3 |
| G19 | MA CLEAR | 23 | 0.4 | -1.2 | 0.04 | mA | 1-3 |
| G20 | COM BUS CLK | 26 | 0.4 | -2.0 | 0.05 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VIII. Input current, low level, test - Continued.

| Test cond | Signal name | Pin no. | Vil (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| G21 | NDRO MODE | 32 | 0.4 | -0.25 | 0.025 | mA | 1-3 |
| G22 | BOOTSTRAP | 33 | 0.4 | -0.25 | 0.025 | mA | 1-3 |
| G23 | MMIO SEL | 34 | 0.4 | -1.6 | 0.02 | mA | 1-3 |
| G24 | TEST ENABLE | 35 | 0.4 | -1.2 | 0.04 | mA | 1-3 |
| G25 | SAB REQ 0 | 37 | 0.4 | -1.75 | -0.592 | mA | 1-3 |
| G26 | SAB REQ 1 | 38 | | | | | |
| G27 | SAB REQ 2 | 39 | | | | | |
| G28 | SAB REQ 3 | 41 | 0.4 | -1.75 | -0.592 | mA | 1-3 |
| G29 | SAB DATA 0 | 42 | 0.4 | -0.25 | 0.07 | mA | 1-3 |
| G30 | SAB DATA 1 | 43 | | | | | |
| G31 | SAB DATA 2 | 44 | | | | | |
| G32 | SAB DATA 3 | 45 | | | | | |
| G33 | SAB DATA 4 | 46 | | | | | |
| G34 | SAB DATA 5 | 47 | | | | | |
| G35 | SAB DATA 6 | 48 | | | | | |
| G36 | SAB DATA 7 | 49 | 0.4 | -0.25 | 0.07 | mA | 1-3 |
| G37 | CB READ D8 | 52 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G38 | CB READ D9 | 53 | | | | | |
| G39 | CB READ D10 | 54 | | | | | |
| G40 | CB READ D11 | 55 | 0.4 | -0.65 | 0.07 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VIII. Input current, low level, test - Continued.

| Test cond | Signal name | Pin no. | Vil (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| G41 | CB READ D12 | 56 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G42 | CB READ D13 | 57 | | | | | |
| G43 | CB READ D14 | 58 | | | | | |
| G44 | CB READ D15 | 59 | | | | | |
| G45 | CB READ D7 | 61 | | | | | |
| G46 | CB READ D6 | 62 | | | | | |
| G47 | CB READ D5 | 63 | | | | | |
| G48 | CB READ D4 | 64 | | | | | |
| G49 | CB READ D3 | 65 | | | | | |
| G50 | CB READ D2 | 66 | | | | | |
| G51 | CB READ D1 | 67 | | | | | |
| G52 | CB READ D0 | 68 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G53 | CB PARITY ER | 69 | 0.4 | -0.6 | 0.02 | mA | 1-3 |
| G54 | C I INT EN | 70 | 0.4 | -0.2 | 0.02 | mA | 1-3 |
| G55 | C II INT EN | 71 | | | | | |
| G56 | C III INT EN | 72 | 0.4 | -0.2 | 0.02 | mA | 1-3 |
| G57 | HI CLASS I | 73 | 0.4 | -1.4 | -0.587 | mA | 1-3 |
| G58 | HI CLASS II | 74 | | | | | |
| G59 | HI CLASS III | 76 | 0.4 | -1.4 | -0.587 | mA | 1-3 |
| G60 | IOC INTRPT | 80 | 0.4 | -2.0 | 0.05 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE VIII. Input current, low level, test - Continued.

| Test cond | Signal name | Pin no. | Vil (V) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| G61 | CB A/WR D15 | 82 | 0.4 | -0.65 | 0.07 | mA | 1-3 |
| G62 | CB A/WR D14 | 83 | | | | | |
| G63 | CB A/WR D13 | 84 | | | | | |
| G64 | CB A/WR D12 | 85 | | | | | |
| G65 | CB A/WR D11 | 86 | | | | | |
| G66 | CB A/WR D10 | 87 | | | | | |
| G67 | CB A/WR D9 | 88 | | | | | |
| G68 | CB A/WR D8 | 89 | | | | | |
| G69 | CB A/WR D0 | 91 | | | | | |
| G70 | CB A/WR D1 | 92 | | | | | |
| G71 | CB A/WR D2 | 93 | | | | | |
| G72 | CB A/WR D3 | 94 | | | | | |
| G73 | CB A/WR D4 | 95 | | | | | |
| G74 | CB A/WR D5 | 96 | | | | | |
| G75 | CB A/WR D6 | 97 | | | | | |
| G76 | CB A/WR D7 | 98 | 0.4 | -0.65 | 0.07 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input current, low level, test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | G1-G76 |
| Power supply current limit | 2.86 A | NA | G1-G76 |
| Forcing voltage, (Vil) | 0.4 V | ± 50 mV | G1-G76 |
| Pattern voltage | | | |
| high, (VH) | 3.0 V | ± 100 mV | G1-G76 |
| low, (VL) | 0.0 V | ± 100 mV | G1-G76 |
| Input current measurement | NA | ± 16.0 uA | G1-G5 |
| | NA | ± 107.9 uA | G6-G8 |
| | NA | ± 36.0 uA | G9,G10 |
| | NA | ± 31.0 uA | G11-G13 |
| | NA | ± 36.0 uA | G14,G15 |
| | NA | ± 133.0 uA | G16 |
| | NA | ± 62.0 uA | G17 |
| | NA | ± 129.4 uA | G18 |
| | NA | ± 62.0 uA | G19 |
| | NA | ± 102.0 uA | G20 |
| | NA | ± 13.7 uA | G21,G22 |
| | NA | ± 81.0 uA | G23 |
| | NA | ± 62.0 uA | G24 |
| | NA | ± 57.9 uA | G25-G28 |
| | NA | ± 16.0 uA | G29-G36 |
| | NA | ± 36.0 uA | G37-G52 |
| | NA | ± 31.0 uA | G53 |
| | NA | ± 11.0 uA | G54-G56 |
| | NA | ± 40.7 uA | G57-G59 |
| | NA | ± 102.0 uA | G60 |
| | NA | ± 36.0 uA | G61-G76 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table VIII and the current then measured. The forcing voltage overshoot shall not exceed 100 mV.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE IX. Output voltage, high level, test.

| Test cond | Signal name | Pin no. | Ioh (mA) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| H1 | CB FCTN B3 | 2 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H2 | CB FCTN B2 | 3 | | | | | |
| H3 | CB FCTN B1 | 4 | | | | | |
| H4 | CB FCTN B0 | 5 | | | | | |
| H5 | CB WRITE EN | 6 | | | | | |
| H6 | SUB BUS OR | 7 | | | | | |
| H7 | COM BUS OR | 12 | | | | | |
| H8 | COM BUS ATR | 13 | | | | | |
| H9 | COM BUS DTR | 17 | | | | | |
| H10 | COM BUS BUSY | 18 | | | | | |
| H11 | IOC COM BUSY | 19 | | | | | |
| H12 | SUB BUSREQ 0 | 24 | | | | | |
| H13 | MAE PROTECT | 27 | | | | | |
| H14 | READ PROTECT | 28 | | | | | |
| H15 | WR PROTECT | 29 | | | | | |
| H16 | IOC TO MAE | 30 | | | | | |
| H17 | CB NDRO STR | 36 | | | | | |
| H18 | SAB DATA 0 | 42 | | | | | |
| H19 | SAB DATA 1 | 43 | | | | | |
| H20 | SAB DATA 2 | 44 | -0.4 | 2.4 | 4.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE IX. Output voltage, high level, test - Continued.

| Test cond | Signal name | Pin no. | Ioh (mA) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| H21 | SAB DATA 3 | 45 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H22 | SAB DATA 4 | 46 | | | | | |
| H23 | SAB DATA 5 | 47 | | | | | |
| H24 | SAB DATA 6 | 48 | | | | | |
| H25 | SAB DATA 7 | 49 | | | | | |
| H26 | EN SAB MAE | 50 | | | | | |
| H27 | CB READ D8 | 52 | | | | | |
| H28 | CB READ D9 | 53 | | | | | |
| H29 | CB READ D10 | 54 | | | | | |
| H30 | CB READ D11 | 55 | | | | | |
| H31 | CB READ D12 | 56 | | | | | |
| H32 | CB READ D13 | 57 | | | | | |
| H33 | CB READ D14 | 58 | | | | | |
| H34 | CB READ D15 | 59 | | | | | |
| H35 | CB READ D7 | 61 | | | | | |
| H36 | CB READ D6 | 62 | | | | | |
| H37 | CB READ D5 | 63 | | | | | |
| H38 | CB READ D4 | 64 | | | | | |
| H39 | CB READ D3 | 65 | | | | | |
| H40 | CB READ D2 | 66 | -0.4 | 2.4 | 4.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE IX. Output voltage, high level, test - Continued.

| Test cond | Signal name | Pin no. | Ioh (mA) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| H41 | CB READ D1 | 67 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H42 | CB READ D0 | 68 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H43 | HI CI INTR | 77 | -0.16 | 2.4 | 4.5 | V | 1-4 |
| H44 | HI CII INTR | 78 | | | | | |
| H45 | HI CIII INTR | 79 | -0.16 | 2.4 | 4.5 | V | 1-4 |
| H46 | CB A/WR D15 | 82 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H47 | CB A/WR D14 | 83 | | | | | |
| H48 | CB A/WR D13 | 84 | | | | | |
| H49 | CB A/WR D12 | 85 | | | | | |
| H50 | CB A/WR D11 | 86 | | | | | |
| H51 | CB A/WR D10 | 87 | | | | | |
| H52 | CB A/WR D9 | 88 | | | | | |
| H53 | CB A/WR D8 | 89 | | | | | |
| H54 | CB A/WR D0 | 91 | | | | | |
| H55 | CB A/WR D1 | 92 | | | | | |
| H56 | CB A/WR D2 | 93 | | | | | |
| H57 | CB A/WR D3 | 94 | | | | | |
| H58 | CB A/WR D4 | 95 | | | | | |
| H59 | CB A/WR D5 | 96 | | | | | |
| H60 | CB A/WR D6 | 97 | -0.4 | 2.4 | 4.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE IX. Output voltage, high level, test - Continued.

| Test cond | Signal name | Pin no. | Ioh (mA) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| H61 | CB A/WR D7 | 98 | -0.4 | 2.4 | 4.5 | V | 1-4 |
| H62 | SAB COMMAND | 99 | ″ | ″ | ″ | ″ | ″ |
| H63 | SAB CLK | 100 | -0.4 | 2.4 | 4.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Output voltage, high level, test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 4.5 V | ± 45 mV | H1-H63 |
| Power supply current limit | 2.86 A | NA | H1-H63 |
| Forcing current, (Ioh) | -0.4 mA<br>-0.16 mA<br>-0.4 mA | ± 40 uA<br>± 16 uA<br>± 40 uA | H1-H42<br>H43-H45<br>H46-H63 |
| Pattern voltage high, (VH)<br>low, (VL) | 3.0 V<br>0.0 V | ± 100 mV<br>± 100 mV | H1-H63<br>H1-H63 |
| Output voltage measurement | NA | ± 105 mV | H1-H63 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.


(d) The forcing current shall be applied to the pin specified in the appropriate test conditions in table IX and the voltage then measured.

3. The load shall be as indicated on figure 9.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

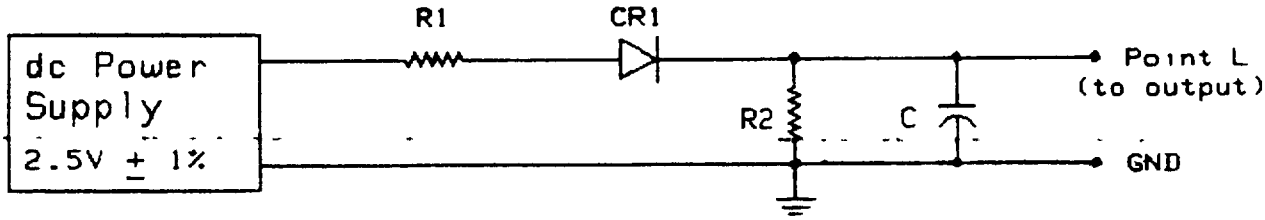


NOTES:

1. CR1 = 1N4148 or equivalent.

2. The load capacitance is defined as follows:

(a) C = 100 ± 10 pF (including probe and parasitic capacitance) for sample dynamic tests.

(b) C = 300 ± 30 pF (including probe and parasitic capacitance) for qualification dynamic tests.

(c) The functional test shall be performed with only a 100 ± 10 pF load (including probe and parasitic capacitance) attached to each output.

(d) C not required for any other tests.

FIGURE 9. Logic load circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

3. Select R1 for a current flow of Iol when point L is held at Vol. The values of Iol and Vol for each output are in the table below.

4. The value of R2 for each output load shall be as specified in the table below.

| Pin number | R2 1/ (ohms) | Iol (mA) | Vol (volts) |
|---|---|---|---|
| 3,4,5,6,7,12,13, 17,18,19,24,27,28, 29,30,36,42,43,44, 45,46,47,48,49,50, 52,53,54,55,56,61, 62,64,65,66,67,68, 82,83,84,85,86,87, 88,89,91,92,93,94, 95,96,97,98,99,100 | 6200 | 6.0 | 0.5 |
| 2,57,58,59,63 | 6200 | NA | NA |
| 77,78,79 | 16000 | 1.6 | 0.5 |

1/ All resistors are metal film, ± 1 percent, 1/4 W.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test.

| Test cond | Signal name | Pin no. | Iol (mA) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| J1 | CB FCTN B2 | 3 | 6.0 | 0.0 | 0.5 | V | 1-4 |
| J2 | CB FCTN B1 | 4 | | | | | |
| J3 | CB FCTN B0 | 5 | | | | | |
| J4 | CB WRITE EN | 6 | | | | | |
| J5 | SUB BUS OR | 7 | | | | | |
| J6 | COM BUS OR | 12 | | | | | |
| J7 | COM BUS ATR | 13 | | | | | |
| J8 | COM BUS DTR | 17 | | | | | |
| J9 | COM BUS BUSY | 18 | | | | | |
| J10 | IOC COM BUSY | 19 | | | | | |
| J11 | SUB BUSREQ 0 | 24 | | | | | |
| J12 | MAE PROTECT | 27 | | | | | |
| J13 | READ PROTECT | 28 | | | | | |
| J14 | WR PROTECT | 29 | | | | | |
| J15 | IOC TO MAE | 30 | | | | | |
| J16 | CB NDRO STR | 36 | | | | | |
| J17 | SAB DATA 0 | 42 | | | | | |
| J18 | SAB DATA 1 | 43 | | | | | |
| J19 | SAB DATA 2 | 44 | | | | | |
| J20 | SAB DATA 3 | 45 | 6.0 | 0.0 | 0.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

| Test cond | Signal name | Pin no. | Iol (mA) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| J21 | SAB DATA 4 | 46 | 6.0 | 0.0 | 0.5 | V | 1-4 |
| J22 | SAB DATA 5 | 47 | | | | | |
| J23 | SAB DATA 6 | 48 | | | | | |
| J24 | SAB DATA 7 | 49 | | | | | |
| J25 | EN SAB MAE | 50 | | | | | |
| J26 | CB READ D8 | 52 | | | | | |
| J27 | CB READ D9 | 53 | | | | | |
| J28 | CB READ D10 | 54 | | | | | |
| J29 | CB READ D11 | 55 | | | | | |
| J30 | CB READ D12 | 56 | | | | | |
| J31 | CB READ D7 | 61 | | | | | |
| J32 | CB READ D6 | 62 | | | | | |
| J33 | CB READ D4 | 64 | | | | | |
| J34 | CB READ D3 | 65 | | | | | |
| J35 | CB READ D2 | 66 | | | | | |
| J36 | CB READ D1 | 67 | | | | | |
| J37 | CB READ D0 | 68 | 6.0 | 0.0 | 0.5 | V | 1-4 |
| J38 | HI CI INTR | 77 | 1.6 | 0.0 | 0.5 | V | 1-4 |
| J39 | HI CII INTR | 78 | | | | | |
| J40 | HI CIII INTR | 79 | 1.6 | 0.0 | 0.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

| Test cond | Signal name | Pin no. | Iol (mA) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| J41 | CB A/WR D15 | 82 | 6.0 | 0.0 | 0.5 | V | 1-4 |
| J42 | CB A/WR D14 | 83 | | | | | |
| J43 | CB A/WR D13 | 84 | | | | | |
| J44 | CB A/WR D12 | 85 | | | | | |
| J45 | CB A/WR D11 | 86 | | | | | |
| J46 | CB A/WR D10 | 87 | | | | | |
| J47 | CB A/WR D9 | 88 | | | | | |
| J48 | CB A/WR D8 | 89 | | | | | |
| J49 | CB A/WR D0 | 91 | | | | | |
| J50 | CB A/WR D1 | 92 | | | | | |
| J51 | CB A/WR D2 | 93 | | | | | |
| J52 | CB A/WR D3 | 94 | | | | | |
| J53 | CB A/WR D4 | 95 | | | | | |
| J54 | CB A/WR D5 | 96 | | | | | |
| J55 | CB A/WR D6 | 97 | | | | | |
| J56 | CB A/WR D7 | 98 | | | | | |
| J57 | SAB COMMAND | 99 | | | | | |
| J58 | SAB CLK | 100 | 6.0 | 0.0 | 0.5 | V | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Output voltage, low level, test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 4.5 V | ± 45 mV | J1-J58 |
| Power supply current limit | 2.86 A | NA | J1-J58 |
| Forcing current, (Iol) | 6.0 mA<br>1.6 mA<br>6.0 mA | ± 600 uA<br>± 160 uA<br>± 600 uA | J1-J37<br>J38-J40<br>J41-J58 |
| Pattern voltage high, (VH)<br>low, (VL) | 3.0 V<br>0.0 V | ± 100 mV<br>± 100 mV | J1-J58<br>J1-J58 |
| Output voltage measurement | NA | ± 25 mV | J1-J58 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing current shall be applied to the pin specified in the appropriate test conditions in table X and the voltage then measured.

3. The load shall be as indicated on figure 9.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XI. Output leakage current, high and low level, test.

| Test cond | Signal name | Pin no. | Forcing voltage (V) | 25 ± 5°C Initial limits Min | 25 ± 5°C Initial limits Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| High level | | | | | | | |
| K1 | SUB BUS OR | 7 | 2.4 | -0.05 | 0.05 | mA | 1-3 |
| K2 | MAE PROTECT | 27 | | | | | |
| K3 | READ PROTECT | 28 | | | | | |
| K4 | WR PROTECT | 29 | | | | | |
| K5 | IOC TO MAE | 30 | | | | | |
| K6 | CB NDRO STR | 36 | 2.4 | -0.05 | 0.05 | mA | 1-3 |
| Low level | | | | | | | |
| K7 | SUB BUS OR | 7 | 0.4 | -0.05 | 0.05 | mA | 1-3 |
| K8 | MAE PROTECT | 27 | | | | | |
| K9 | READ PROTECT | 28 | | | | | |
| K10 | WR PROTECT | 29 | | | | | |
| K11 | IOC TO MAE | 30 | | | | | |
| K12 | CB NDRO STR | 36 | 0.4 | -0.05 | 0.05 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Output leakage current, high and low level, test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | K1-K12 |
| Power supply current limit | 2.86 A | NA | K1-K12 |
| Forcing voltage,<br>(Voh)<br>(Vol) | <br>2.4 V<br>0.4 V | <br>± 50 mV<br>± 50 mV | <br>K1-K6<br>K7-K12 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>3.0 V<br>0.0 V | <br>± 100 mV<br>± 100 mV | <br>K1-K12<br>K1-K12 |
| Output current measurement | NA | ± 5 uA | K1-K12 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated measurement at the appropriate pattern line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table XI and the current then measured. The forcing voltage overshoot shall not exceed 100 mV.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XII. Input clamp diode voltage test.

| Test cond | Signal name | Pin no. | Iin (mA) | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|---|
| L1 | IOC SEL 1 | 8 | -18.0 | -1.2 | 0.0 | V | 1-3 |
| L2 | IOC SEL 0 | 9 | | | | | |
| L3 | COMMAND BUSY | 11 | | | | | |
| L4 | CB ADRS T/O | 14 | | | | | |
| L5 | CB DATA T/O | 15 | | | | | |
| L6 | CB CYCLE ABT | 16 | | | | | |
| L7 | SUB BUS GRT | 20 | -18.0 | -1.2 | 0.0 | V | 1-3 |
| L8 | COM BUS GRT | 21 | -18.0 | -1.5 | 0.0 | V | 1-3 |
| L9 | MAE PRESENT | 22 | -18.0 | -1.5 | 0.0 | V | 1-3 |
| L10 | MA CLEAR | 23 | -18.0 | -1.2 | 0.0 | V | 1-3 |
| L11 | COM BUS CLK | 26 | | | | | |
| L12 | NDRO MODE | 32 | -18.0 | -1.2 | 0.0 | V | 1-3 |
| L13 | BOOTSTRAP | 33 | -18.0 | -1.5 | 0.0 | V | 1-3 |
| L14 | MMIO SEL | 34 | | | | | |
| L15 | TEST ENABLE | 35 | -18.0 | -1.5 | 0.0 | V | 1-3 |
| L16 | SAB REQ 0 | 37 | -18.0 | -1.2 | 0.0 | V | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input clamp diode voltage test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | Off | NA | L1-L16 |
| Power supply current limit | NA | NA | L1-L16 |
| Forcing current, (Iin) | -18 mA | ± 1.8 mA | L1-L16 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>NA<br>NA | <br>NA<br>NA | <br>L1-L16<br>L1-L16 |
| Input voltage measurement | NA<br>NA<br>NA<br>NA<br>NA | ± 60 mV<br>± 75 mV<br>± 60 mV<br>± 75 mV<br>± 60 mV | L1-L7<br>L8,L9<br>L10-L12<br>L13-L15<br>L16 |

2. The following procedure is required to perform this test:

(a) No power shall be applied to the module.

(b) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(c) The forcing current shall be applied to the pin specified in the appropriate test conditions in table XII and the voltage then measured.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XIII. Power supply filter capacitance test.

| Test cond | Parameter | Pin numbers | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| M1 | PSFC | 1 | 5.8 | 10.7 | uF | 1-4 |
| M2 | PSFC | 51 | 7.0 | 13.0 | uF | 1-4 |

NOTES:

1. Power supply filter capacitance test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Capacitance bridge frequency | 1 KHz | ± 100 Hz | M1,M2 |
| Capacitance bridge voltage | 0.3 Vp | ± 30 mVp | M1,M2 |
| Capacitance measurement | NA<br>NA | ± 245 nF<br>± 300 nF | M1<br>M2 |

2. The capacitance bridge used in this test shall be item C01. The negative terminal shall be connected to the module ground and the positive terminal to the pin indicated in table XIII.

3. The test circuit shall be as indicated on figure 10.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

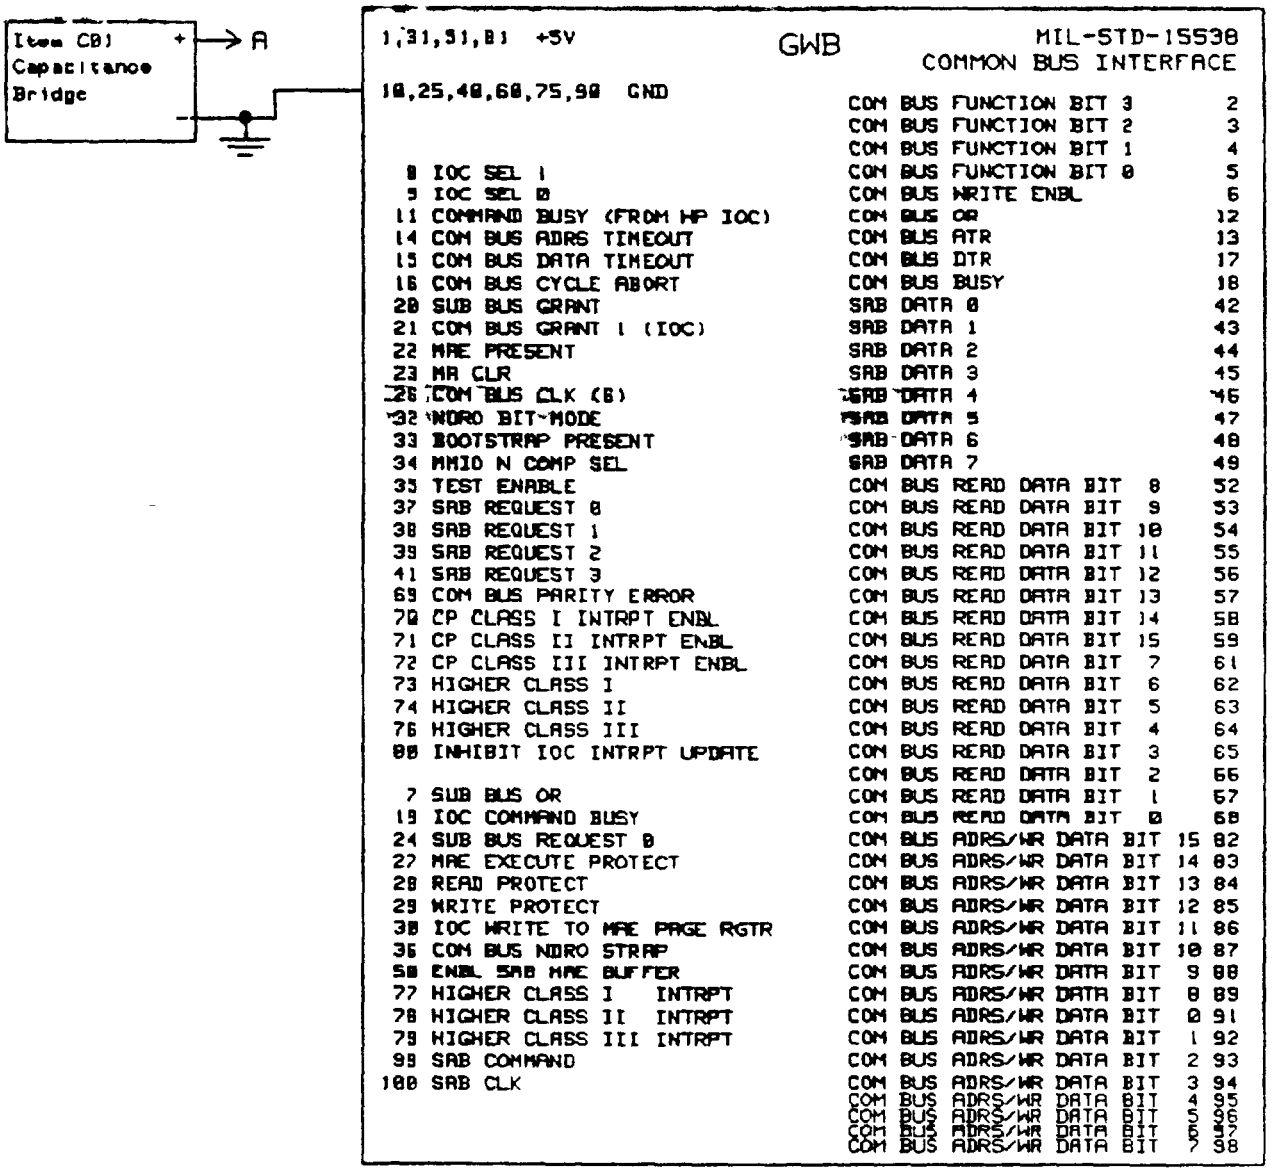



FIGURE 10. Power supply filter capacitance test circuit for table XIII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XIV. Power supply current test.

| Test cond | Parameter | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| N | Icc | 1,31<br>51,81 | 800 | 1910 | mA | 1-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Power supply current test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.5 V | ± 55 mV | N |
| Power supply current limit | 2.86 A | NA | N |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>3.0 V<br>0.0 V | <br>± 100 mV<br>± 100 mV | <br>N<br>N |
| Power supply current measurement | NA | ± 55.5 mA | N |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test and take a measurement at the pattern line with the maximum power supply current as indicated in table XIV.

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XV. Functional test.

| Test cond | Test description | Notes |
|---|---|---|
| P1 | Functional test<br>minimum power supply voltage<br>maximum pattern rate (1175 nS) | 1-3 |
| P2 | Functional test<br>maximum power supply voltage<br>maximum pattern rate (1175 nS) | 1-3 |

NOTES:

1. Functional test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 4.5 V<br>5.5 V | ± 45 mV<br>± 55 mV | P1<br>P2 |
| Power supply current limit | 2.86 A | NA | P1,P2 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>2.4 V<br>0.4 V | <br>± 100 mV<br>± 100 mV | <br>P1,P2<br>P1,P2 |
| Output voltage verification<br>high, (Voh)<br>high, (Voh)<br>low, (Vol) | <br>NA<br>NA<br>NA | <br>± 105 mV<br>± 155 mV<br>± 20 mV | <br>P1<br>P2<br>P1,P2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Use the appropriate pattern to verify the functional performance of the module as indicated in table XV using only a capacitive load of 100 pF (see figure 9). The output compare levels shall be as follows:

High level: $2.4\ V \leq Voh \leq Vcc$
Low level: $0.0\ V \leq Vol \leq 0.5\ V$

3. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVI. Dynamic test.

| Test cond | Test description | Notes |
|---|---|---|
| Q1 | Dynamic test, sample maximum pattern rate (1175 nS) minimum power supply | 1-6 |
| Q2 | Dynamic test, sample maximum pattern rate (1175 nS) maximum power supply | 1-6 |
| Q3 | Dynamic test, qualification maximum pattern rate (1175 nS) minimum power supply | 1-6 |
| Q4 | Dynamic test, qualification maximum pattern rate (1175 nS) maximum power supply | 1-6 |

NOTES:

1. Dynamic test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 4.5 V<br>5.5 V | ± 45 mV<br>± 55 mV | Q1,Q3<br>Q2,Q4 |
| Power supply current limit | 2.86 A | NA | Q1-Q4 |
| Input voltage<br>high, (VH)<br>low, (VL) | <br>2.4 V<br>0.4 V | <br>± 100 mV<br>± 100 mV | <br>Q1-Q4<br>Q1-Q4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Output voltage verification | | | |
| high, (Voh) | NA | ± 100 mV | Q1,Q3 |
| high, (Voh) | NA | ± 100 mV | Q2,Q4 |
| low, (Vol) | NA | ± 100 mV | Q1-Q4 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.


(b) The output compare levels shall be as follows:

High level: $Vref \leq Voh \leq Vcc$
Low level: $0.0\ V \leq Vol \leq Vref$

(c) The dynamic parameters are found in table XVII.

3. The load circuit for this test is specified on figure 9.

4. Input/Output (I/O) waveforms are as referenced on figure 11. All of the input waveforms shall have the following characteristics:

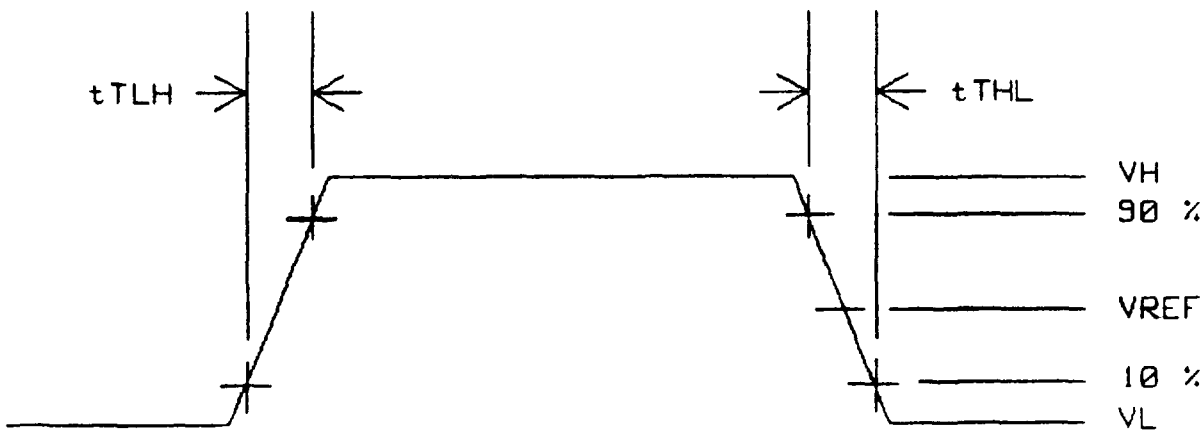




Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

Where:

(a) VH and VL are as specified in the test tolerance table.

(b) tTLH = tTHL $\leq$ 10 nS.

(c) Vref = 1.6 V.

5. This test shall be performed as indicated in table XVI.

6. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVII. Dynamic parameters.

| Ref num | Sym | Parameter | Minimum limit | | | Maximum limit | | | Unit | Figs |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | -55°C | 25°C | 85°C | -55°C | 25°C | 85°C | | |
| 1 | tpd | COM BUS CLK to SUB BUSREQ 0 | - | - | - | 1175 | 1175 | 1175 | nS | 11 |
| 2 | tpd | COM BUS CLK to COM BUS ATR | - | - | - | 325 | 325 | 325 | nS | 11 |
| 3 | tpd | COM BUS CLK to COM BUS BUSY | - | - | - | 175 | 175 | 175 | nS | 11 |
| 4 | tpd | COM BUS CLK to COM BUS DTR | - | - | - | 375 | 375 | 375 | nS | 11 |
| 5 | tpd | COM BUS CLK to IOC COM BUSY | - | - | - | 60 | 60 | 60 | nS | 11 |
| 6 | tpd | SUB BUS GRT to EN SAB MAE | - | - | - | 20 | 20 | 20 | nS | 11 |
| 7 | tpd | COM BUS GRT to CB A/WR D15-D0 | - | - | - | 28 | 28 | 28 | nS | 11 |
| 8 | tpd | COM BUS CLK to SAB COMMAND | - | - | - | 45 | 45 | 45 | nS | 11 |
| 9 | tpd | COM BUS CLK to SAB DATA 0-7 | - | - | - | 52 | 52 | 52 | nS | 11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVII. Dynamic parameters - Continued.

| Ref num | Sym | Parameter | Minimum limit | | | Maximum limit | | | Unit | Figs |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | -55°C | 25°C | 85°C | -55°C | 25°C | 85°C | | |
| 10 | tpd | COM BUS CLK to CB READ D0-D4 | - | - | - | 670 | 670 | 670 | nS | 11 |
| 10 | tpd | COM BUS CLK to CB READ D8-D15 | - | - | - | 670 | 670 | 670 | nS | 11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

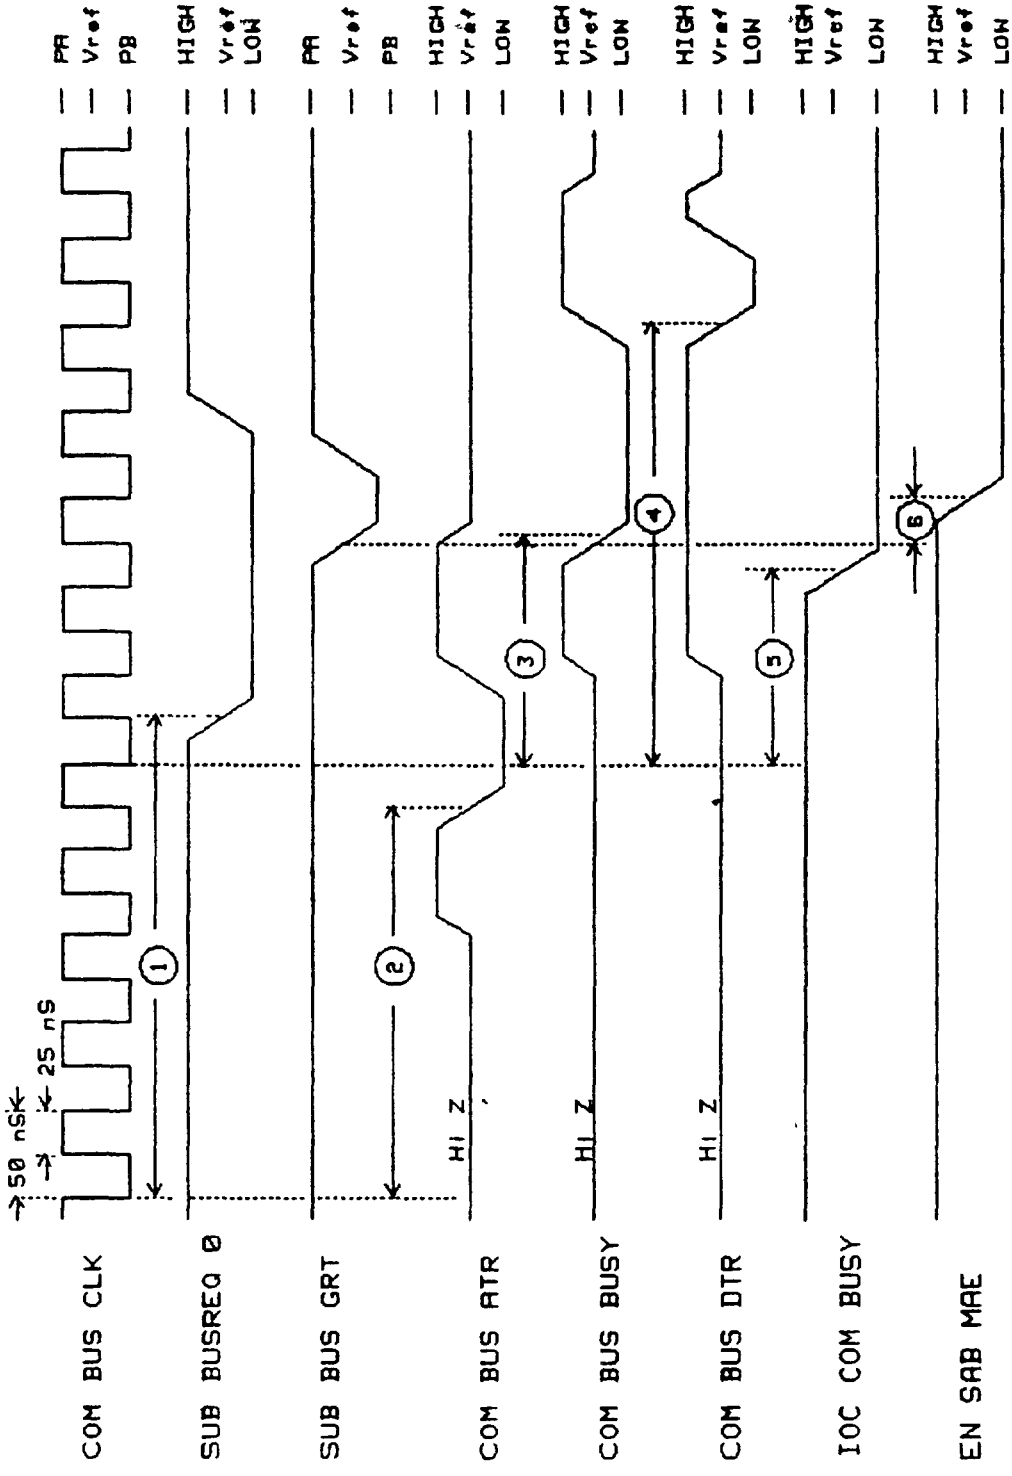



FIGURE 11a. Dynamic waveforms for table XVII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

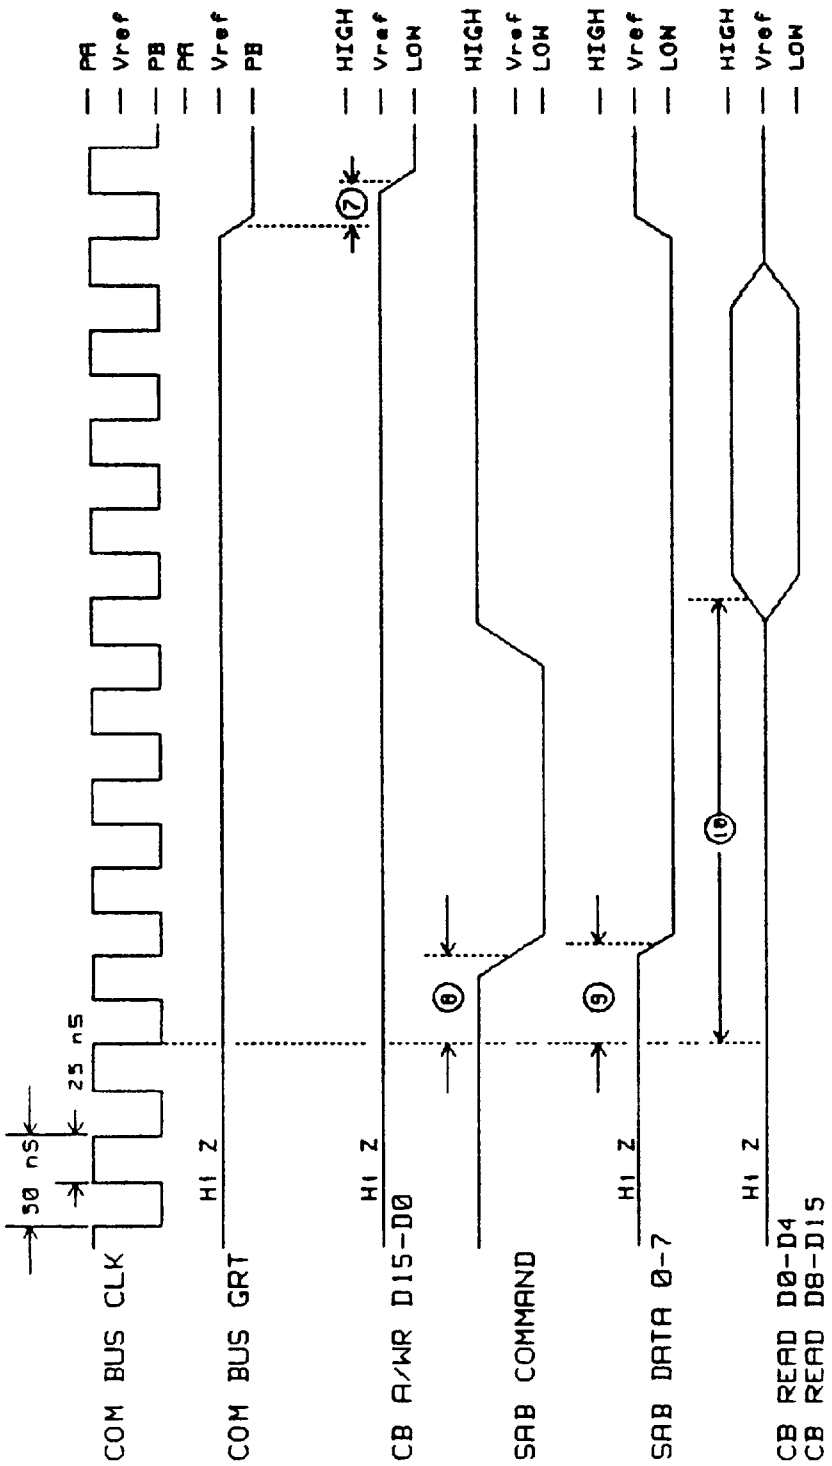



FIGURE 11b. Dynamic waveforms for table XVII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Input and output capacitance test.

| Test cond | Signal name | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| | Bidirectionals | | | | | |
| R1 | CB FCTN B3 | 2 | 4 | 100 | pF | 1-4 |
| R2 | CB FCTN B2 | 3 | | | | |
| R3 | CB FCTN B1 | 4 | | | | |
| R4 | CB FCTN B0 | 5 | 4 | 100 | pF | 1-4 |
| R5 | CB WRITE EN | 6 | 4 | 75 | pF | 1-4 |
| | Inputs | | | | | |
| R6 | IOC SEL 1 | 8 | 4 | 125 | pF | 1-4 |
| R7 | IOC SEL 0 | 9 | 4 | 125 | pF | 1-4 |
| R8 | COMMAND BUSY | 11 | 4 | 150 | pF | 1-4 |
| | Bidirectionals | | | | | |
| R9 | COM BUS OR | 12 | 4 | 75 | pF | 1-4 |
| R10 | COM BUS ATR | 13 | 4 | 75 | pF | 1-4 |
| | Inputs | | | | | |
| R11 | CB ADRS T/O | 14 | 2 | 75 | pF | 1-4 |
| R12 | CB DATA T/O | 15 | | | | |
| R13 | CB CYCLE ABT | 16 | 2 | 75 | pF | 1-4 |
| | Bidirectionals | | | | | |
| R14 | COM BUS DTR | 17 | 4 | 75 | pF | 1-4 |
| R15 | COM BUS BUSY | 18 | 4 | 75 | pF | 1-4 |
| | Inputs | | | | | |
| R16 | SUB BUS GRT | 20 | 4 | 75 | pF | 1-4 |
| R17 | COM BUS GRT | 21 | | | | |
| R18 | MAE PRESENT | 22 | 4 | 75 | pF | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Input and output capacitance test - Continued.

| Test cond | Signal name | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| R19 | MA CLEAR | 23 | 4 | 75 | pF | 1-4 |
| R20 | COM BUS CLK | 26 | 2 | 75 | pF | 1-4 |
| R21 | NDRO MODE | 32 | | | | |
| R22 | BOOTSTRAP | 33 | | | | |
| R23 | MMIO SEL | 34 | 2 | 75 | pF | 1-4 |
| R24 | TEST ENABLE | 35 | 4 | 125 | pF | 1-4 |
| R25 | SAB REQ 0 | 37 | 4 | 75 | pF | 1-4 |
| R26 | SAB REQ 1 | 38 | | | | |
| R27 | SAB REQ 2 | 39 | | | | |
| R28 | SAB REQ 3 | 41 | 4 | 75 | pF | 1-4 |
| Bidirectionals | | | 4 | 75 | pF | 1-4 |
| R29 | SAB DATA 0 | 42 | | | | |
| R30 | SAB DATA 1 | 43 | | | | |
| R31 | SAB DATA 2 | 44 | | | | |
| R32 | SAB DATA 3 | 45 | | | | |
| R33 | SAB DATA 4 | 46 | | | | |
| R34 | SAB DATA 5 | 47 | | | | |
| R35 | SAB DATA 6 | 48 | | | | |
| R36 | SAB DATA 7 | 49 | | | | |
| R37 | CB READ D8 | 52 | | | | |
| R38 | CB READ D9 | 53 | | | | |
| R39 | CB READ D10 | 54 | 4 | 75 | pF | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Input and output capacitance test - Continued.

| Test cond | Signal name | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| R40 | CB READ D11 | 55 | 4 | 75 | pF | 1-4 |
| R41 | CB READ D12 | 56 | | | | |
| R42 | CB READ D13 | 57 | | | | |
| R43 | CB READ D14 | 58 | | | | |
| R44 | CB READ D15 | 59 | | | | |
| R45 | CB READ D7 | 61 | | | | |
| R46 | CB READ D6 | 62 | | | | |
| R47 | CB READ D5 | 63 | | | | |
| R48 | CB READ D4 | 64 | | | | |
| R49 | CB READ D3 | 65 | | | | |
| R50 | CB READ D2 | 66 | | | | |
| R51 | CB READ D1 | 67 | | | | |
| R52 | CB READ D0 | 68 | 4 | 75 | pF | 1-4 |
| Inputs | | | | | | |
| R53 | CB PARITY ER | 69 | 2 | 75 | pF | 1-4 |
| R54 | C I INT EN | 70 | | | | |
| R55 | C II INT EN | 71 | | | | |
| R56 | C III INT EN | 72 | 2 | 75 | pF | 1-4 |
| R57 | HI CLASS I | 73 | 2 | 100 | pF | 1-4 |
| R58 | HI CLASS II | 74 | | | | |
| R59 | HI CLASS III | 76 | 2 | 100 | pF | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Input and output capacitance test - Continued.

| Test cond | Signal name | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| R60 | IOC INTRPT | 80 | 2 | 125 | pF | 1-4 |
| | Bidirectionals | | | | | |
| R61 | CB A/WR D15 | 82 | 4 | 75 | pF | 1-4 |
| R62 | CB A/WR D14 | 83 | | | | |
| R63 | CB A/WR D13 | 84 | | | | |
| R64 | CB A/WR D12 | 85 | | | | |
| R65 | CB A/WR D11 | 86 | | | | |
| R66 | CB A/WR D10 | 87 | | | | |
| R67 | CB A/WR D9 | 88 | | | | |
| R68 | CB A/WR D8 | 89 | | | | |
| R69 | CB A/WR D0 | 91 | | | | |
| R70 | CB A/WR D1 | 92 | | | | |
| R71 | CB A/WR D2 | 93 | | | | |
| R72 | CB A/WR D3 | 94 | | | | |
| R73 | CB A/WR D4 | 95 | | | | |
| R74 | CB A/WR D5 | 96 | | | | |
| R75 | CB A/WR D6 | 97 | | | | |
| R76 | CB A/WR D7 | 98 | 4 | 75 | pF | 1-4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input and output capacitance test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Capacitance meter frequency | 1 MHz | ± 100 KHz | R1-R76 |
| Capacitance meter voltage | 15 mV | ± 1.5 mV | R1-R76 |
| Capacitance measurement | NA | ± 4.8 pF | R1-R4 |
| | NA | ± 3.55 pF | R5 |
| | NA | ± 6.05 pF | R6,R7 |
| | NA | ± 7.3 pF | R8 |
| | NA | ± 3.55 pF | R9,R10 |
| | NA | ± 3.65 pF | R11-R13 |
| | NA | ± 3.55 pF | R14-R19 |
| | NA | ± 3.65 pF | R20-R23 |
| | NA | ± 6.05 pF | R24 |
| | NA | ± 3.55 pF | R25-R52 |
| | NA | ± 3.65 pF | R53-R56 |
| | NA | ± 4.9 pF | R57-R59 |
| | NA | ± 6.15 pF | R60 |
| | NA | ± 3.55 pF | R61-R76 |

2. The capacitance meter used in this test shall be item C05. The negative terminal shall be connected to the module ground and the positive terminal to the pin indicated in table XVIII.

3. The test circuit shall be as indicated on figure 12.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

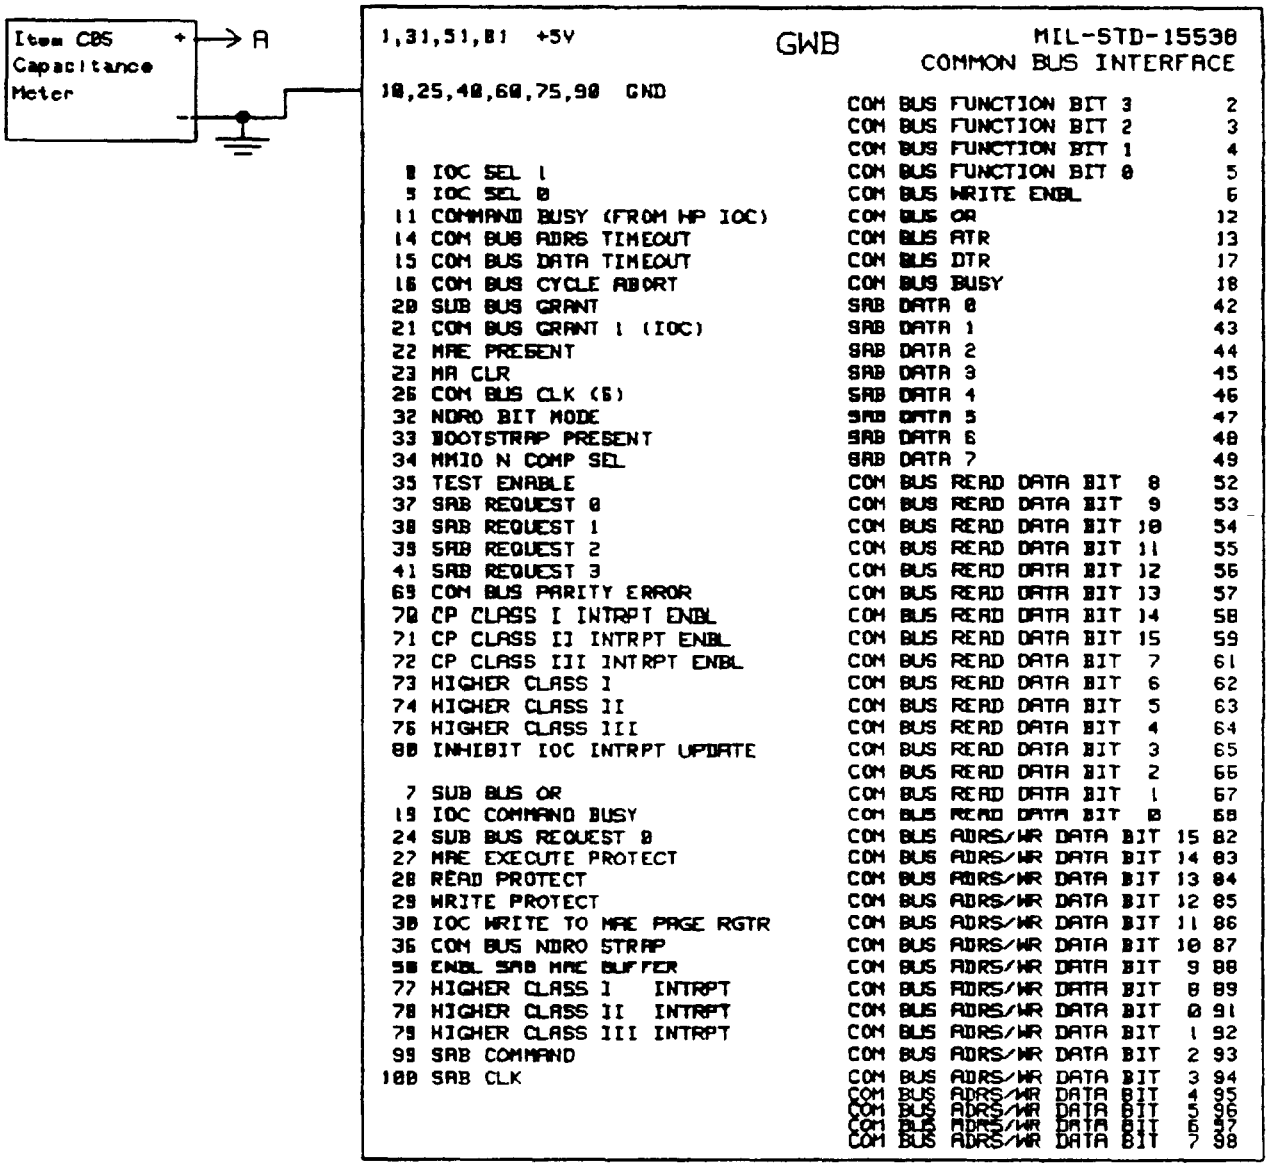



FIGURE 12. Input and output capacitance test circuit for table XVIII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

TABLE XIX. Power supply transient amplitude test.

| Test cond | Parameter | Pin no. | 25 ± 5°C Initial limits Min | Max | Units | Notes |
|---|---|---|---|---|---|---|
| T1 | PSTA | 1 | 0 | 400 | mV | 1-4 |
| T2 | PSTA | 51 | 0 | 400 | mV | 1-4 |

NOTES:

1. Power supply transient amplitude test tolerance table.

| Condition | Value | Accuracy | Test condition |
|---|---|---|---|
| Power supply, (Vcc) | 5.0 V | ± 250 mV | T1,T2 |
| Power supply current limit | 2.86 A | NA | T1,T2 |
| Pattern voltage<br>high, (VH)<br>low, (VL) | <br>3.0 V<br>0.0 V | <br>± 100 mV<br>± 100 mV | <br>T1,T2<br>T1,T2 |
| Power supply transient amplitude measurement | NA | ± 20 mV | T1,T2 |

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table to an external source. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

(b) Precondition the module under test and make the indicated measurement for the test condition shown in table XIX.

(c) Vcc pins 1 and 31 shall be shorted together, pins 51 and 81 shall be shorted together and the scope point, probe 'A', shall be connected to the pin indicated in table XIX.

(d) Using the oscilloscope, D06, inspect for the most negative spike as shown on figure 13 at the pattern line with the maximum power supply current.

(e) The maximum probe capacitance is 15 pF. There shall be no other capacitance present on Vcc to ground.

3. The test circuit shall be as indicated on figure 14.

4. Abbreviations used are defined in 6.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.


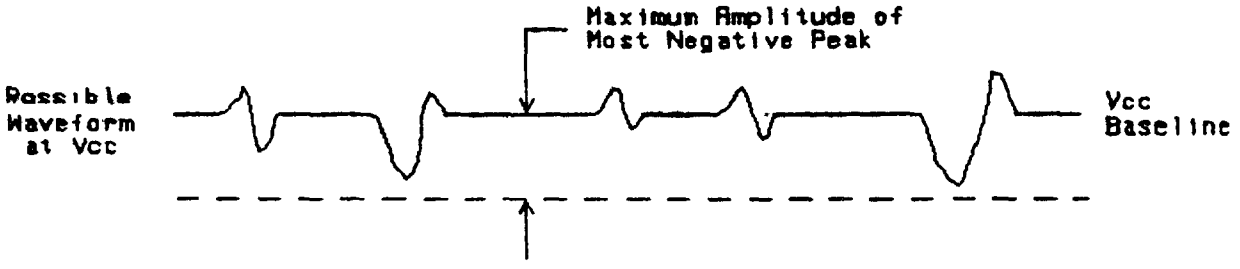



FIGURE 13. Power supply transient amplitude waveform for table XIX.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

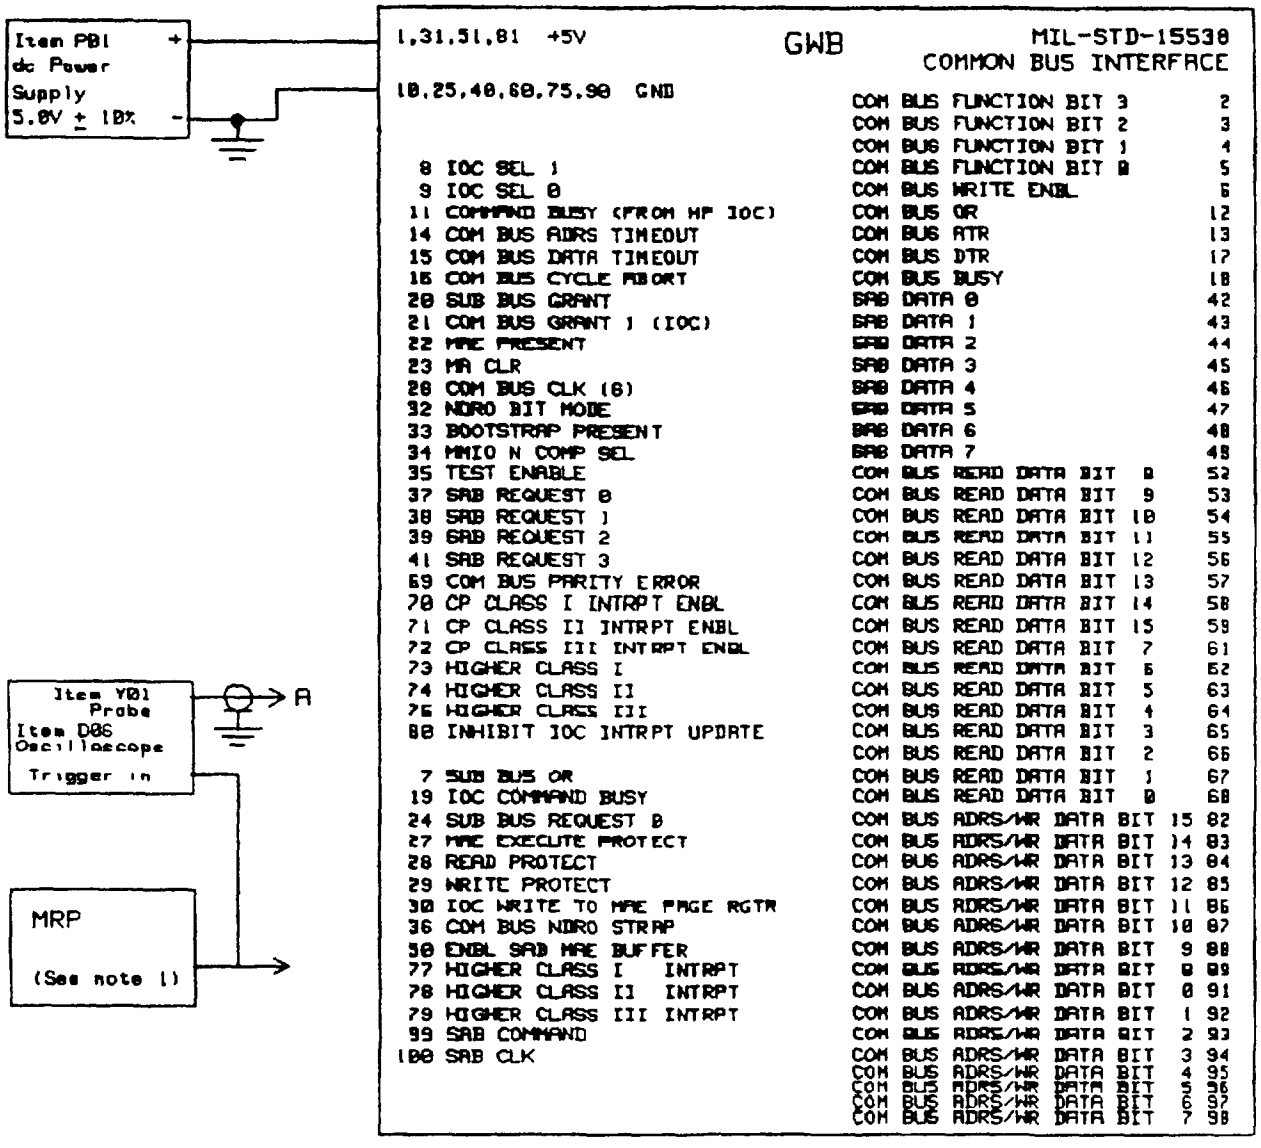


NOTE:

1. MRP or emulator capable of reproducing system backpanel characteristics.

FIGURE 14. Power supply transient amplitude test circuit for table XIX.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE. This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

| I RECOMMEND A CHANGE: | 1 DOCUMENT NUMBER | 2 DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | MIL-M-28787/429 | |

3. DOCUMENT TITLE
Modules, Standard Electronic, MIL-STD-1553B Common Bus Interface Module, Key Code GWB

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5 REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION |
|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON<br>(If applicable) |
| | 7. DATE SUBMITTED (YYMMDD) |

8 PREPARING ACTIVITY

| a NAME | b TELEPHONE (Include Area Code) |
|---|---|
| Technical Point of Contact (TPOC):<br>Mr. Robert F. Dilger (Code 602A)<br>PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS: | (1) Commercial: TPOC: 812-854-1528<br>(2) AUTOVON: 88-482-1528 |
| ADDRESS (Include Zip Code)<br>Commanding Officer<br>Naval Weapons Support Center<br>ATTN. Robert F. Dilger, Bldg. 2940W, Code 602A<br>Crane, Indiana 47522-5060 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:14Z
Check the source to verify that this is the current version before use.