INCH-POUND

MIL-M-28787/436
AMENDMENT 1
25 May 1994

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY CONTROL MODULE, KEY CODE JMN

This amendment forms a part of Military Specification MIL-M-28787/436, dated 17 May 1991, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I: Delete and substitute new table I as printed on page 2 of this amendment.

PAGE 8

TABLE I: Delete and substitute new table I as printed on page 3 of this amendment.

PAGE 92

FIGURE 11b: Delete and substitute new figure 11b as printed on page 4 of this amendment.

PAGE 95

TABLE XVIII, Test condition R21, Max limit: Delete "50" and substitute "120". Test conditions R22-R25, Max limits, will remain at "50".

Custodians:
Army - ER
Navy - NW
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0293)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

AMSC N/A
FSC 5963

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:16Z
Check the source to verify that this is the current version before use.

TABLE I Module electrical requirements

Test cond	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 60 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
A	Isolation	II	S	10	INF	10	INF	10	INF	MOhm
	End-of-life	II	S	1	INF	1	INF	1	INF	MOhm
B1-B6	Continuity	III	X	0	1	0	1	0	1	Ohm
C	Vcc stress	IV	Q	--------Module shall pass all remaining tests----						
D1-D4	Ibd	V	S	0.0	0.1	0 0	0.1	0 0	0 1	mA
D5	Ibd	V	S	0 0	0 2	0 0	0.2	0 0	0.2	mA
D6-D9	Ibd	V	S	0.0	0 1	0 0	0 1	0 0	0 1	mA
D10	Ibd	V	S	0.0	0 6	0 0	0 6	0 0	0 6	mA
D11	Ibd	V	S	0.0	0.1	0 0	0 1	0 0	0.1	mA
D12	Ibd	V	S	0 0	1 1	0 0	1.1	0.0	1.1	mA
D13-D25	Ibd	V	S	0.0	0 1	0 0	0 1	0.0	0 1	mA
D26	Ibd	V	S	-0 12	0 22	-0 12	0.22	-0.12	0 22	mA
D27	Ibd	V	S	0 0	0.1	0 0	0 1	0 0	0 1	mA
D28	Ibd	V	S	0.0	1.4	0 0	1 4	0.0	1 4	mA
D29	Ibd	V	S	0 0	0.1	0 0	0 1	0 0	0.1	mA
D30	Ibd	V	S	0.0	0 3	0 0	0.3	0 0	0.3	mA
D31,D32	Ibd	V	S	0.0	0 1	0 0	0.1	0.0	0 1	mA
D33	Ibd	V	S	-0 58	1.67	-0 58	1.67	-0 58	1.67	mA
D34	Ibd	V	S	0.0	0 2	0 0	0.2	0 0	0 2	mA
D35	Ibd	V	S	-0.58	0.78	-0 58	0 78	-0 58	0.78	mA
D36-D38	Ibd	V	S	0 0	0.1	0 0	0 1	0 0	0.1	mA
D39	Ibd	V	S	0 0	0 2	0 0	0 2	0 0	0.2	mA
D40	Ibd	V	S	0 0	0.1	0 0	0 1	0 0	0 1	mA
D41	Ibd	V	S	-0 12	0 22	-0 12	0 22	-0 12	0 22	mA
D42	Ibd	V	S	-0 58	0 68	-0 58	0 68	-0 58	0.68	mA
D43	Ibd	V	S	-0.58	1 67	-0 58	1 67	-0 58	1 67	mA
E1	Ios	VI	S	-150.0	-60 0	-150 0	-60.0	-150 0	-60.0	mA
E2	Ios	VI	S	-350.0	-60 0	-350 0	-60 0	-350 0	-60 0	mA
E3	Ios	VI	S	-150 0	-60.0	-150 0	-60 0	-150 0	-60 0	mA
E4	Ios	VI	S	-350.0	-60 0	-350 0	-60.0	-350 0	-60 0	mA
E5	Ios	VI	S	-150.0	-60 0	-150 0	-60 0	-150 0	-60 0	mA

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:16Z
Check the source to verify that this is the current version before use.

TABLE I Module electrical requirements - Continued

Test cond	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 60 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
R11	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R12	Ci/o	XVIII	Q	4	75	4	75	4	75	pF
R13	Ci/o	XVIII	Q	4	50	4	50	4	50	pF
R14-R20	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R21	Ci/o	XVIII	Q	2	120	2	120	2	120	pF
R22-R25	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R26	Ci/o	XVIII	Q	4	75	4	75	4	75	pF
R27	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R28	Ci/o	XVIII	Q	4	200	4	200	4	200	pF
R29	Ci/o	XVIII	Q	2	75	2	75	2	75	pF
R30	Ci/o	XVIII	Q	6	100	6	100	6	100	pF
R31,R32	Ci/o	XVIII	Q	2	75	2	75	2	75	pF
R33	Ci/o	XVIII	Q	2	200	2	200	2	200	pF
R34	Ci/o	XVIII	Q	6	100	6	100	6	100	pF
R35	Ci/o	XVIII	Q	4	100	4	100	4	100	pF
R36	Ci/o	XVIII	Q	6	75	6	75	6	75	pF
R37,R38	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R39	Ci/o	XVIII	Q	2	216	2	216	2	216	pF
R40	Ci/o	XVIII	Q	4	100	4	100	4	100	pF
R41	Ci/o	XVIII	Q	2	50	2	50	2	50	pF
R42,R43	Ci/o	XVIII	Q	4	75	4	75	4	75	pF
R44	Ci/o	XVIII	Q	2	175	2	175	2	175	pF
T1,T2	PSTA	XIX	Q	0	400	0	400	0	400	mV

See footnotes on next page

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:16Z
Check the source to verify that this is the current version before use.

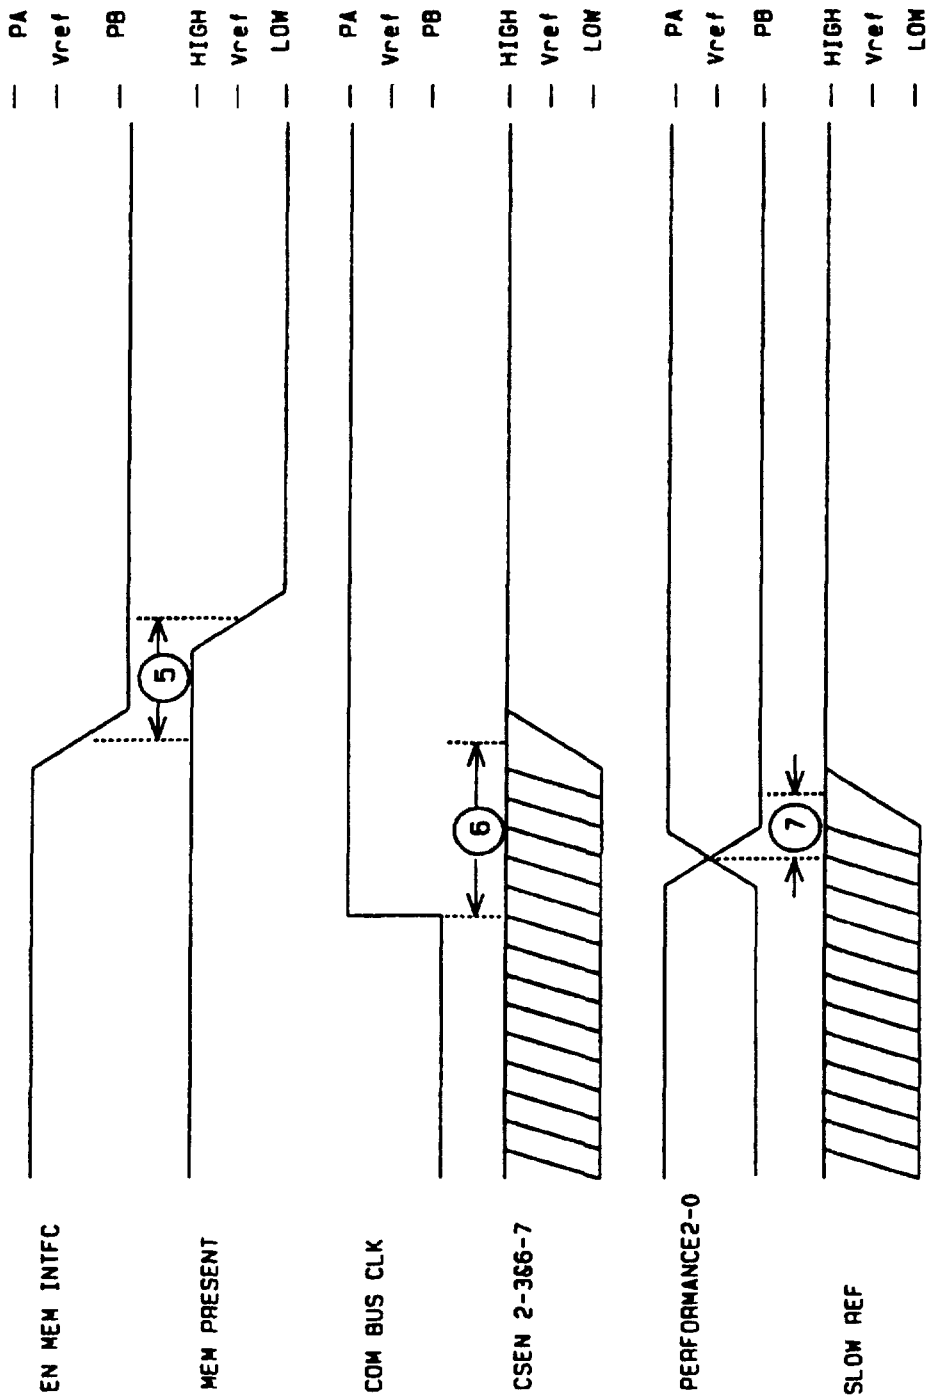


FIGURE 11b. Dynamic waveforms for table XVII - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:16Z
Check the source to verify that this is the current version before use.