INCH-POUND

MIL-M-28787/505(NW)
AMENDMENT 1
3 August 1994

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

IOC DATA BUS LOWER MODULE, KEY CODE AWG

This amendment forms a part of Military Specification MIL-M-28787/505, dated 23 June 1989, and is approved for use by the Crane Division, Naval Surface Warfare Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGES 4 THROUGH 8

TABLE I: Delete and substitute new table I as printed on pages 3 through 7 of this amendment.

PAGE 20

6.3.1, Input parameters, Signals "ADRS 0" and "ADRS 1", Vic min (V) column: Delete "-1.5" (two places) and substitute "NA" (two places).

PAGES 24 THROUGH 28

6.3.2, Output parameters, Ios max (mA) column: Delete Ios max (mA) column.

PAGES 52 THROUGH 56

TABLE VI: Delete and substitute new table VI as printed on pages 8 through 11 of this amendment.

PAGES 77 THROUGH 79

TABLE XI: Delete and substitute new table XI as printed on pages 12 through 14 of this amendment.

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

PAGE 85

FIGURE 11: Delete and substitute new figure 11 as printed on page 15 of this amendment.

PAGES 95 THROUGH 99

FIGURES 12a, 12b, 12c, 12d, and 12e: Delete and substitute new figures 12a, 12b, 12c, 12d, and 12e as printed on pages 16 through 20 of this amendment.

PAGE 106

TABLE XVIII, Input clamp diode latch up test, Test cond. column: Delete "S" and substitute "S1".

TABLE XVIII, Input clamp diode latch up test: Append the following test condition to table XVIII:

Test cond.	Signal name	Pin no.	Iin (mA)	25° ± 5° C Initial limits		Units	Notes
				Min	Max		
S2	MPC MODE	36	-18.0	-1.2	2.4	V	1-3

TABLE XVIII, Test tolerance table, Test condition column: Delete "S" (six places) and substitute "S1, S2" (six places).

Preparing activity:
Navy - NW

(Project 5963-N860)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test condition	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/ Min	25 ± 5°C 4/ Max	Class I 4/ 0 ± 5°C 60 ± 5°C Min	Class I 4/ 0 ± 5°C 60 ± 5°C Max	Class II 4/ -55 ± 5°C 85 ± 5°C Min	Class II 4/ -55 ± 5°C 85 ± 5°C Max	Units
A	Isolation	II	S	10	INF	10	INF	10	INF	MOhm
	End-of-life	II	S	1	INF	1	INF	1	INF	MOhm
B1-B6	Continuity	III	X	0	1	0	1	0	1	Ohm
C	Vcc stress	IV	S	------Module shall pass all remaining tests------						
D1	Ibd	V	S	0.0	1.2	0.0	1.2	0.0	1.2	mA
D2,D3	Ibd	V	S	0.0	1.0	0.0	1.0	0.0	1.0	mA
D4,D5	Ibd	V	S	-0.12	1.11	-0.12	1.11	-0.12	1.11	mA
D6	Ibd	V	S	-0.12	2.11	-0.12	2.11	-0.12	2.11	mA
D7-D12	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D13	Ibd	V	S	0.0	1.0	0.0	1.0	0.0	1.0	mA
D14-D16	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D17	Ibd	V	S	0.0	11.2	0.0	11.2	0.0	11.2	mA
D18	Ibd	V	S	0.0	1.2	0.0	1.2	0.0	1.2	mA
D19	Ibd	V	S	0.0	2.9	0.0	2.9	0.0	2.8	mA
D20	Ibd	V	S	0.0	0.2	0.0	0.2	0.0	0.2	mA
D21-D25	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D26	Ibd	V	S	0.0	0.2	0.0	0.2	0.0	0.2	mA
D27,D28	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D29	Ibd	V	S	0.0	0.3	0.0	0.3	0.0	0.3	mA
D30	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D31	Ibd	V	S	0.0	0.3	0.0	0.3	0.0	0.3	mA
D32-D35	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D36,D37	Ibd	V	S	0.0	0.2	0.0	0.2	0.0	0.2	mA
D38	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
E1-E52	Ios	VI	S	------Module shall pass all remaining tests------						

1/ See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test condition	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 80 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
F1	Ilh	VII	X	-2.25	0.07	-2.25	0.07	-2.25	0.07	mA
F2,F3	Ilh	VII	X	-0.25	0.03	-0.25	0.03	-0.25	0.03	mA
F4,F5	Ilh	VII	X	-5.68	-2.85	-5.68	-2.85	-5.68	-2.85	mA
F6	Ilh	VII	X	-7.68	-2.8	-7.68	-2.8	-7.68	-2.8	mA
F7-F12	Ilh	VII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
F13	Ilh	VII	X	-2.0	0.05	-2.0	0.05	-2.0	0.05	mA
F14-F16	Ilh	VII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
F17	Ilh	VII	X	-21.4	0.57	-21.4	0.57	-21.4	0.57	mA
F18	Ilh	VII	X	-2.8	0.09	-2.8	0.09	-2.8	0.09	mA
F19	Ilh	VII	X	-8.45	0.26	-8.45	0.26	-8.45	0.26	mA
F20	Ilh	VII	X	-0.8	0.04	-0.8	0.04	-0.8	0.04	mA
F21-F23	Ilh	VII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
F24-F27	Ilh	VII	X	-0.45	0.09	-0.45	0.09	-0.45	0.09	mA
F28,F29	Ilh	VII	X	-1.8	0.02	-1.8	0.02	-1.8	0.02	mA
F30	Ilh	VII	X	-0.8	0.04	-0.8	0.04	-0.8	0.04	mA
F31	Ilh	VII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
F32-F39	Ilh	VII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
F40	Ilh	VII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
F41	Ilh	VII	X	-1.4	0.06	-1.4	0.06	-1.4	0.06	mA
F42	Ilh	VII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
F43	Ilh	VII	X	-1.2	0.06	-1.2	0.06	-1.2	0.06	mA
F44-F47	Ilh	VII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
F48,F49	Ilh	VII	X	-1.2	0.04	-1.2	0.04	-1.2	0.04	mA
F50-F53	Ilh	VII	X	-0.45	0.09	-0.45	0.09	-0.45	0.09	mA
F54	Ilh	VII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
F55,F56	Ilh	VII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
F57,F58	Ilh	VII	X	-0.85	0.09	-0.85	0.09	-0.85	0.09	mA
F59	Ilh	VII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
F60,F61	Ilh	VII	X	-5.68	-2.8	-5.68	-2.8	-5.68	-2.8	mA
F62	Ilh	VII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test condition	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 60 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
G1	III	VIII	X	-2.25	0.07	-2.25	0.07	-2.25	0.07	mA
G2,G3	III	VIII	X	-0.25	0.03	-0.25	0.03	-0.25	0.03	mA
G4,G5	III	VIII	X	-5.68	-2.85	-5.68	-2.85	-5.68	-2.85	mA
G6	III	VIII	X	-7.68	-2.8	-7.68	-2.8	-7.68	-2.8	mA
G7-G12	III	VIII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
G13	III	VIII	X	-2.0	0.05	-2.0	0.05	-2.0	0.05	mA
G14-G16	III	VIII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
G17	III	VIII	X	-21.4	0.57	-21.4	0.57	-21.4	0.57	mA
G18	III	VIII	X	-2.8	0.09	-2.8	0.09	-2.8	0.09	mA
G19	III	VIII	X	-8.45	0.26	-8.45	0.26	-8.45	0.26	mA
G20	III	VIII	X	-0.8	0.04	-0.8	0.04	-0.8	0.04	mA
G21-G23	III	VIII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
G24-G27	III	VIII	X	-0.45	0.09	-0.45	0.09	-0.45	0.09	mA
G28,G29	III	VIII	X	-1.8	0.02	-1.8	0.02	-1.8	0.02	mA
G30	III	VIII	X	-0.8	0.04	-0.8	0.04	-0.8	0.04	mA
G31	III	VIII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
G32-G39	III	VIII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
G40	III	VIII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
G41	III	VIII	X	-1.4	0.06	-1.4	0.06	-1.4	0.06	mA
G42	III	VIII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
G43	III	VIII	X	-1.2	0.06	-1.2	0.06	-1.2	0.06	mA
G44-G47	III	VIII	X	-0.6	0.02	-0.6	0.02	-0.6	0.02	mA
G48,G49	III	VIII	X	-1.2	0.04	-1.2	0.04	-1.2	0.04	mA
G50-G53	III	VIII	X	-0.45	0.09	-0.45	0.09	-0.45	0.09	mA
G54	III	VIII	X	-0.2	0.02	-0.2	0.02	-0.2	0.02	mA
G55,G56	III	VIII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
G57,G58	III	VIII	X	-0.85	0.09	-0.85	0.09	-0.85	0.09	mA
G59	III	VIII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA
G60,G61	III	VIII	X	-5.68	-2.8	-5.68	-2.8	-5.68	-2.8	mA
G62	III	VIII	X	-0.25	0.07	-0.25	0.07	-0.25	0.07	mA

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test condition	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 80 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
H1-H52	Voh	IX	X	2.4	4.5	2.4	4.5	2.4	4.5	V
J1-J52	Vol	X	X	0.0	0.5	0.0	0.5	0.0	0.5	V
L1-L22	Vlc	XI	S	-1.2	0.0	-1.2	0.0	-1.2	0.0	V
L23	Vlc	XI	S	-1.5	0.0	-1.5	0.0	-1.5	0.0	V
L24	Vlc	XI	S	-1.2	0.0	-1.2	0.0	-1.2	0.0	V
L25	Vlc	XI	S	-1.5	0.0	-1.5	0.0	-1.5	0.0	V
L26-L32	Vlc	XI	S	-1.2	0.0	-1.2	0.0	-1.2	0.0	V
L33	Vlc	XI	S	-1.5	0.0	-1.5	0.0	-1.5	0.0	V
M1	PSFC	XII	S	4.2	7.8	4.2	7.8	4.2	7.8	µF
M2	PSFC	XII	S	4.2	7.8	4.2	7.8	4.2	7.8	µF
N	Icc	XIII	X	415	996	415	996	415	996	mA
P1,P2	Functional	XIV	X	---------- See table XIV ----------						
Q1,Q2	Dynamic	XV	S	---------- See table XV ----------						
Q3,Q4	Dynamic	XV	Q	---------- See table XV ----------						
R1	C1/o	XVII	Q	4	75	4	75	4	75	pF
R2,R3	C1/o	XVII	Q	2	50	2	50	2	50	pF
R4	C1/o	XVII	Q	4	75	4	75	4	75	pF
R5	C1/o	XVII	Q	4	100	4	100	4	100	pF
R6	C1/o	XVII	Q	6	125	6	125	6	125	pF

1/ See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test condition	Parameter 5/	Ref test table	Test type 1/ - 3/	25 ± 5°C 4/		Class I 4/ 0 ± 5°C 60 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
R7-R15	Ci/o	XVII	Q	2	75	2	75	2	75	pF
R16	Ci/o	XVII	Q	2	50	2	50	2	50	pF
R17	Ci/o	XVII	Q	20	211	20	211	20	211	pF
R18	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R19	Ci/o	XVII	Q	16	225	16	225	16	225	pF
R20	Ci/o	XVII	Q	4	125	4	125	4	125	pF
R21-R25	Ci/o	XVII	Q	2	50	2	50	2	50	pF
R26	Ci/o	XVII	Q	4	125	4	125	4	125	pF
R27,R28	Ci/o	XVII	Q	2	50	2	50	2	50	pF
R29	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R30	Ci/o	XVII	Q	2	50	2	50	2	50	pF
R31	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R32-R35	Ci/o	XVII	Q	2	50	2	50	2	50	pF
R36	Ci/o	XVII	Q	4	100	4	100	4	100	pF
R37	Ci/o	XVII	Q	4	75	4	75	4	75	pF
R38-R42	Ci/o	XVII	Q	2	75	2	75	2	75	pF
R43-R50	Ci/o	XVII	Q	4	75	4	75	4	75	pF
R51-R53	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R54	Ci/o	XVII	Q	6	75	6	75	6	75	pF
R55,R56	Ci/o	XVII	Q	4	75	4	75	4	75	pF
R57	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R58	Ci/o	XVII	Q	6	125	6	125	6	125	pF
R59	Ci/o	XVII	Q	4	75	4	75	4	75	pF
R60,R61	Ci/o	XVII	Q	6	100	6	100	6	100	pF
R62	Ci/o	XVII	Q	4	75	4	75	4	75	pF
S1,S2	Input diode latchup test	XVIII	Q	-1.2	2.4	-1.2	2.4	-1.2	2.4	V
T1,T2	PSTA	XIX	Q	0	400	0	400	0	400	mV

- See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test.

Test cond.	Signal name	Pin no.	Vout (V)	25 ± 5°C Initial limits	Notes
E1	CIII (CP)	8	0.0	Module shall pass all remaining tests.	1-4
E2	CII (CP)	9			
E3	CI (CP)	11			
E4	TOP PRIORITY	14			
E5	CIII EN	15			
E6	CI INTR	18			
E7	EN CIII LTC	22			
E8	CLK CII STK	23			
E9	SET CH REQ	28			
E10	DATA/ADRS TO	30			
E11	PARITY ERR	32			
E12	CLASS INTR	33			
E13	CIII INTR	35			
E14	PROTECT ERR	39			
E15	B/DESTN 3	43			
E16	B/DESTN 2	44			
E17	B/DESTN 1	45			
E18	B/DESTN 0	46			
E19	RD DATA 07	52			
E20	RD DATA 06	53	0.0	Module shall pass all remaining tests.	1-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond.	Signal name	Pin no.	Vout (V)	25 ± 5°C Initial limits	Notes
E21	RD DATA 05	54	0.0	Module shall pass all remaining tests.	1-4
E22	RD DATA 04	55			
E23	RD DATA 03	56			
E24	RD DATA 02	57			
E25	RD DATA 01	58			
E26	RD DATA 00	59			
E27	CIII HIT	61			
E28	EN CM WR	62			
E29	T4	63			
E30	EI	64			
E31	WR DATA HIT	65			
E32	NO PROTECT	66			
E33	BYTE MODE	67			
E34	SET ADRS 0	68			
E35	DUAL1ST PASS	69			
E36	SLOW	70			
E37	PAGE SEL 00	71			
E38	ERROR	77			
E39	CLK CI STK	78			
E40	FAULT	86	0.0	Module shall pass all remaining tests.	1-4

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Pin no.	Vout (V)	25 ± 5°C Initial limits	Notes
E41	B/DESTN 7	87	0.0	Module shall pass all remaining tests.	1-4
E42	B/DESTN 6	88			
E43	B/DESTN 5	89			
E44	B/DESTN 4	91			
E45	BIT 7	93			
E46	BIT 6	94			
E47	BIT 5	95			
E48	BIT 4	96			
E49	BIT 3	97			
E50	BIT 2	98			
E51	BIT 1	99			
E52	BIT 0	100	0.0	Module shall pass all remaining tests.	1-4

NOTES:

1. Output short circuit current test tolerance table.

Condition	Value	Accuracy	Test condition
Power supply, (Vcc)	5.5 V	± 55 mV	E1-E52
Power supply current limit	1.49 A	NA	E1-E52
Forcing voltage, (Vout)	0.0 V	± 50 mV	E1-E52

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

Condition	Value	Accuracy	Test condition
Pattern voltage			
high, (VH)	3.0 V	± 100 mV	E1-E52
low, (VL)	0.0 V	± 100 mV	E1-E52

2. The following procedure is required to perform this test:

(a) The module power supply and ground pins shall be connected as specified in the power supply stress test table. The power supply voltage, including overshoot, shall not exceed the value specified in the power supply stress test tolerance table.

(b) Precondition the module under test to achieve the required state and make the indicated test at the appropriate pattern line.

(c) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(d) The forcing voltage shall be applied to the pin specified in the appropriate test conditions in table VI. The forcing voltage undershoot shall not exceed 100 mV.

3. When performing this test, no measurements are taken. Only one output shall be tested at a time, and the duration of momentarily grounding each output shall not exceed 1 second.

4. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE XI. Input clamp diode voltage test.

Test cond.	Signal name	Pin no.	Iin (mA)	25 ± 5°C Initial limits Min	Max	Units	Notes
L1	EN INTR DATA	2	-18.0	-1.2	0.0	V	1-3
L2	ENBL T1	12					
L3	MACLR	13					
L4	CII EN	16					
L5	CI EN	17					
L6	LD CII STK	19					
L7	LD CI STK	20					
L8	COMM PNDNG	21					
L9	MAE IN	24					
L10	EN CIII INTR	26					
L11	T SCAN	27					
L12	IO CLK	29					
L13	T/R	34					
L14	MPC MODE	36					
L15	IN INTR UP	37					
L16	LOOPBACK	38					
L17	GRANTED	41					
L18	ABORT	42					
L19	ADRS TO	47					
L20	DATA TO	48					
L21	CLK MDR	49	-18.0	-1.2	0.0	V	1-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

TABLE XI. Input clamp diode voltage test - Continued.

Test cond	Signal name	Pin no.	Iin (mA)	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Notes
L22	PARITY	50	-18.0	-1.2	0.0	V	1-3
L23	S/D LTC	72		-1.5			
L24	CH INTR HIT	73		-1.2			
L25	LD CTRL WD	74		-1.5			
L26	DATA HIT	76		-1.2			
L27	CHAN 1	79					
L28	CHAN 0	80					
L29	CHAN 2	82					
L30	CHAN 3	83					
L31	MDR + T3	84					
L32	IR BIT 8	85		-1.2			
L33	BUFF COMP	92	-18.0	-1.5	0.0	V	1-3

NOTES:

1. Input clamp diode voltage test tolerance table.

Condition	Value	Accuracy	Test condition
Power supply, (Vcc)	Off	NA	L1-L33
Power supply current limit	NA	NA	L1-L33
Forcing current, (Iin)	-18 mA	± 1.8 mA	L1-L33

Source: https://assist.dla.mil -- Downloaded: 202640-20T18:22Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

Condition	Value	Accuracy	Test condition
Pattern voltage high, (VH) low, (VL)	 NA NA	 NA NA	 L1-L33 L1-L33
Input voltage measurement	NA | | | | | NA	± 60 mV ± 75 mV ± 60 mV ± 75 mV ± 60 mV ± 75 mV	L1-L22 L23 L24 L25 L26-L32 L33

2. The following procedure is required to perform this test:

(a) No power shall be applied to the module.

(b) When making the test indicated on a pin, insure that the pin is disconnected from any drivers or comparators except those called for in the test.

(c) The forcing current shall be applied to the pin specified in the appropriate test conditions in table XI and the voltage then measured.

3. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

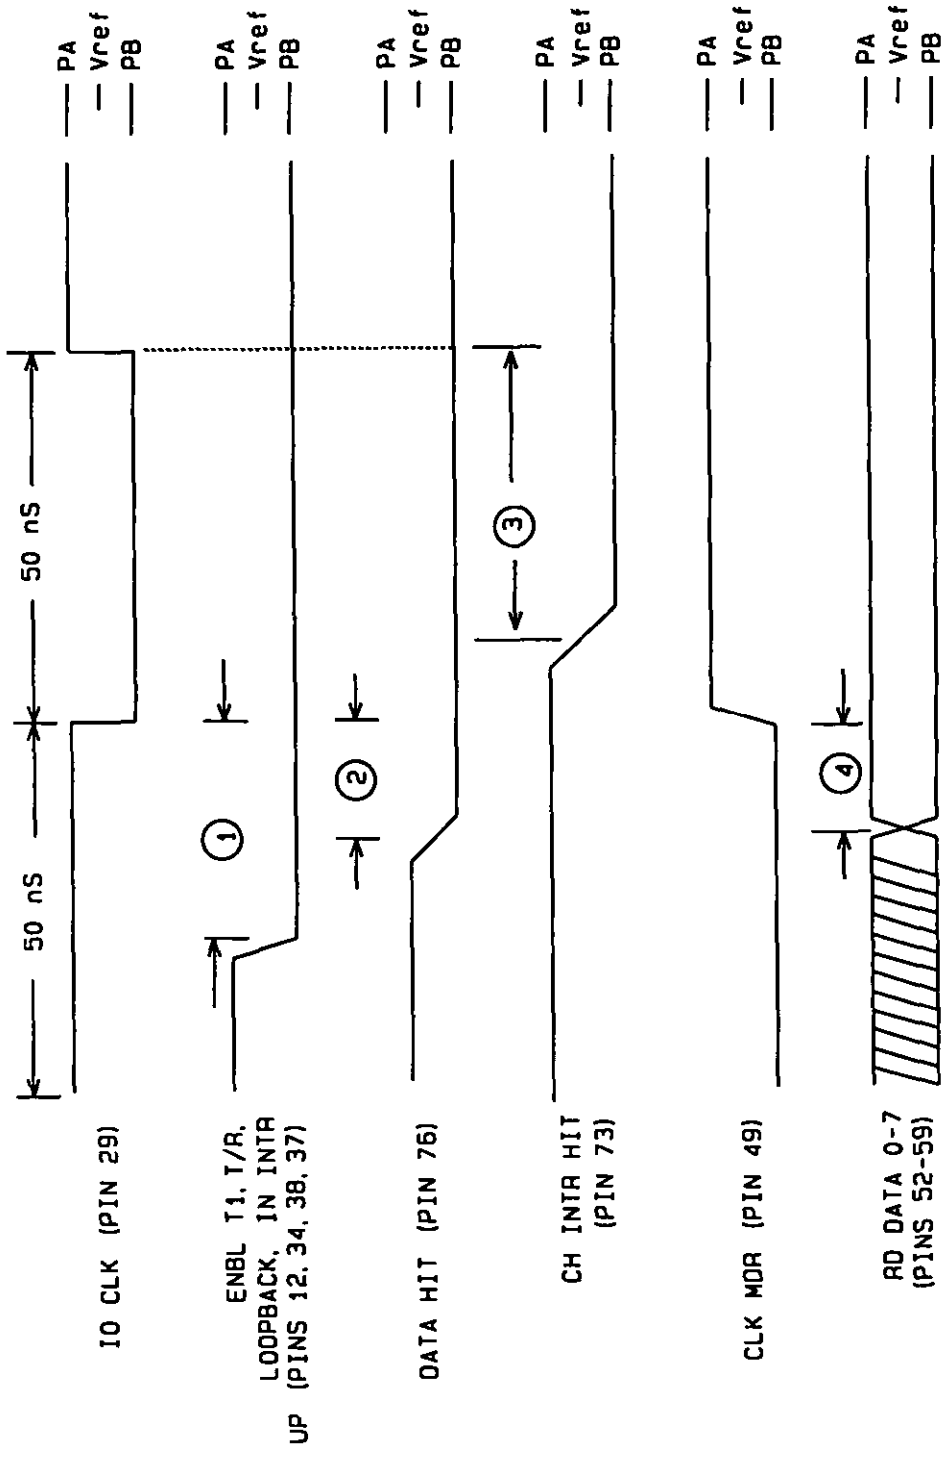


FIGURE 11. Input timing parameters for table XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

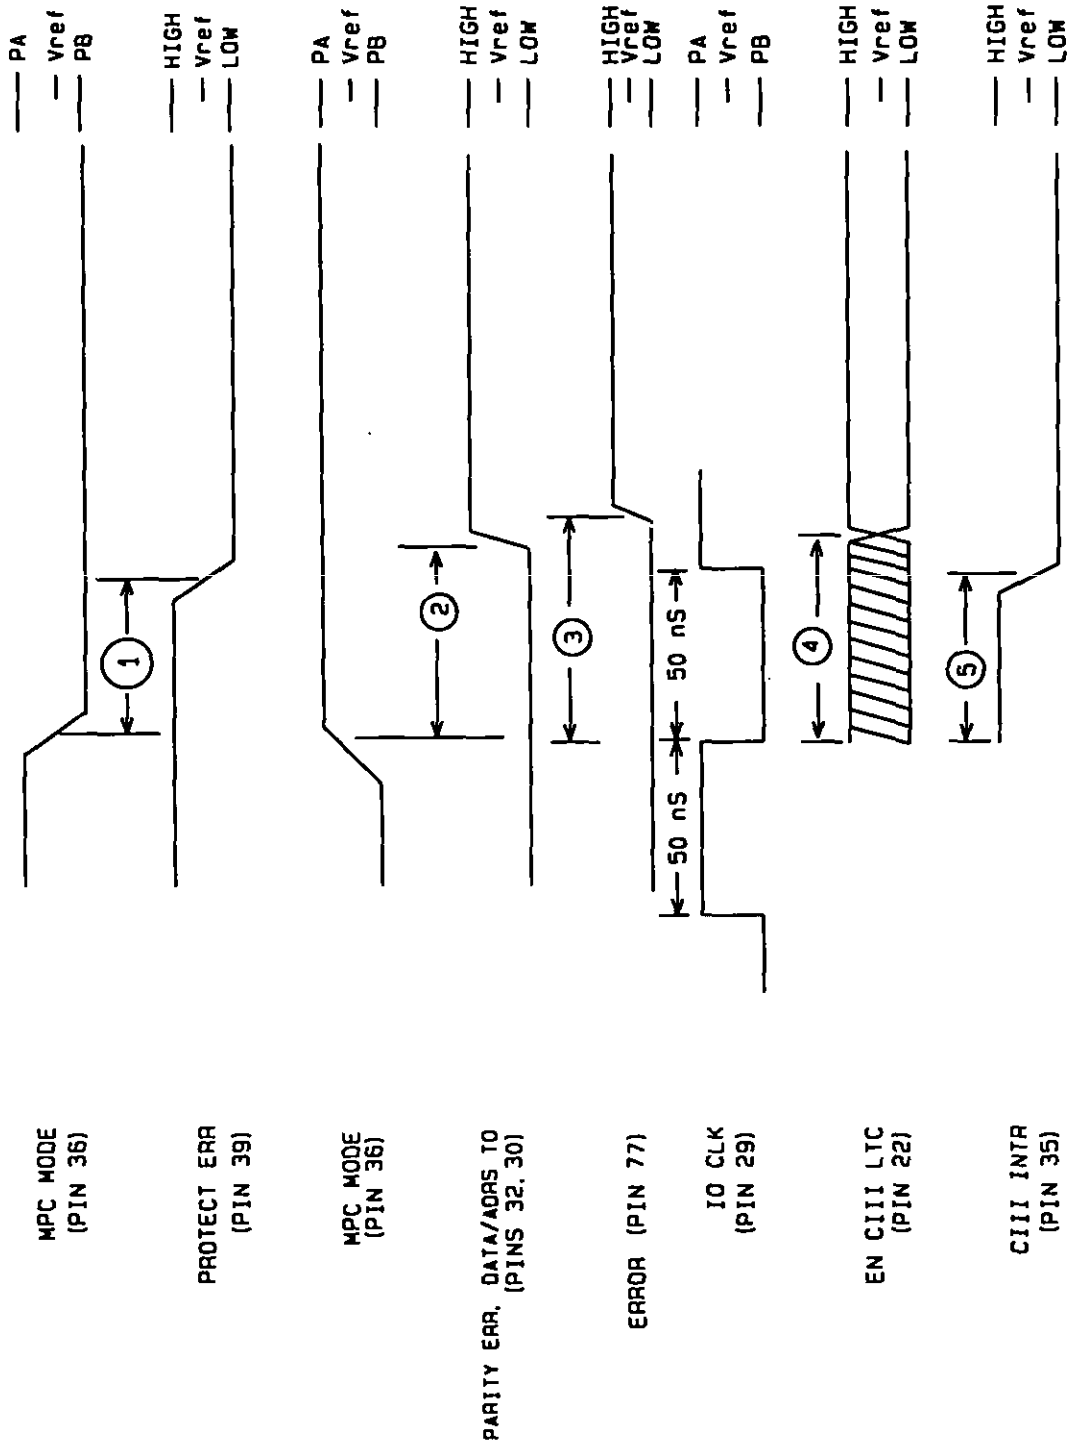


FIGURE 12a. Dynamic waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

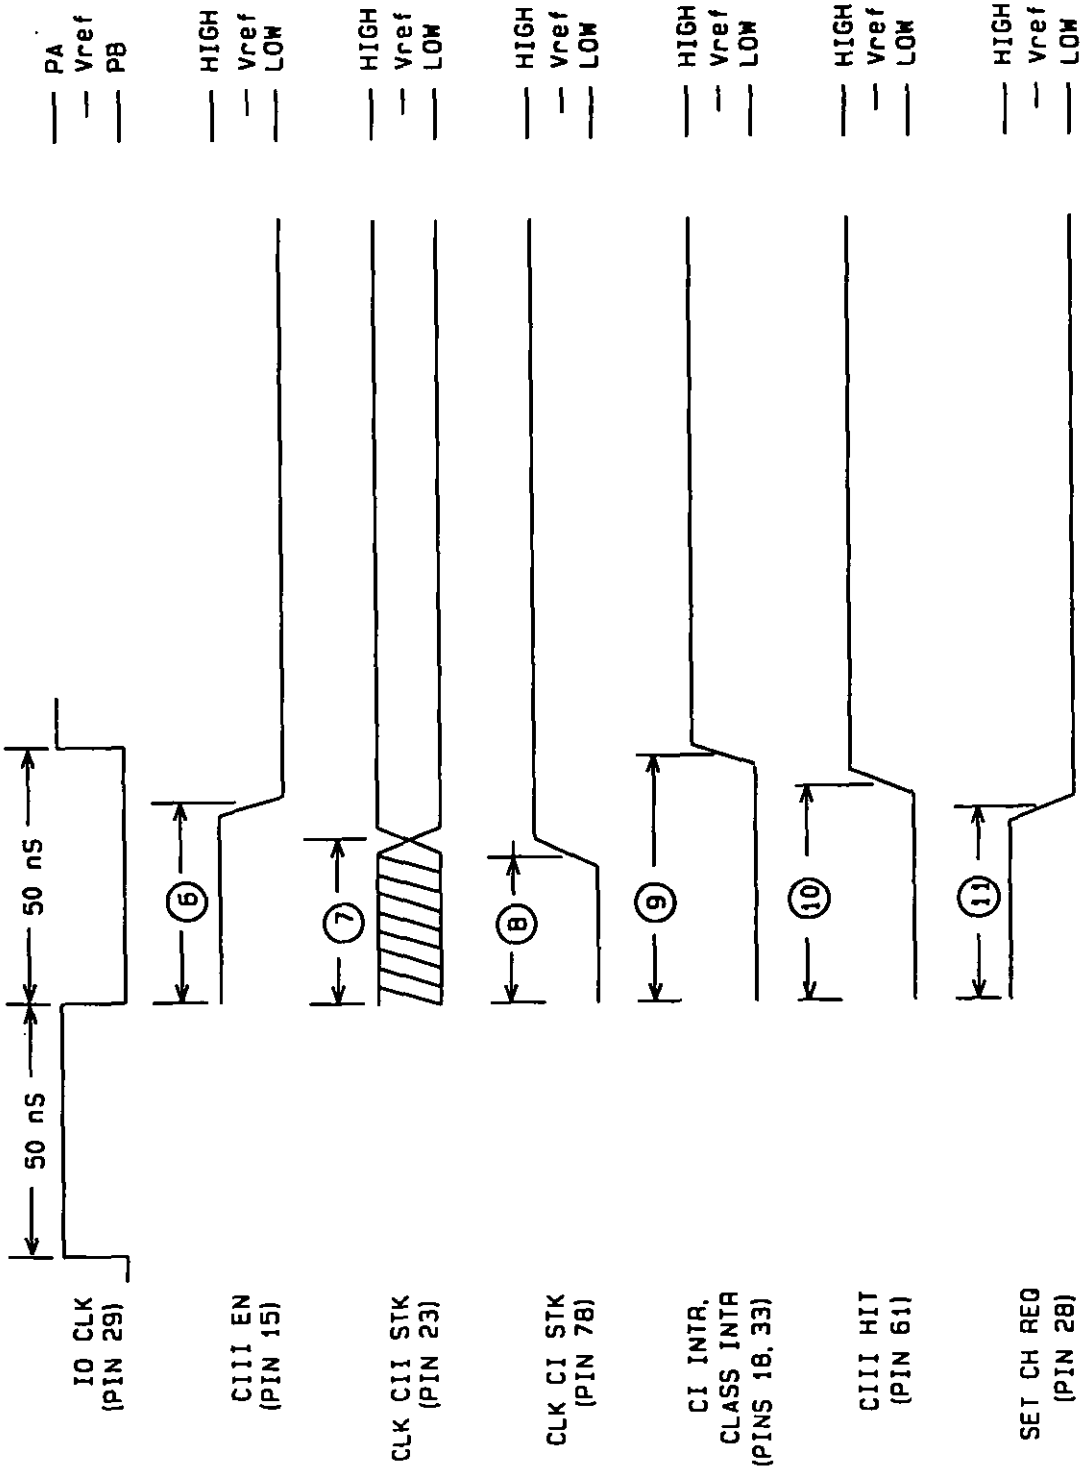


FIGURE 12b. Dynamic waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:22Z
Check the source to verify that this is the current version before use.

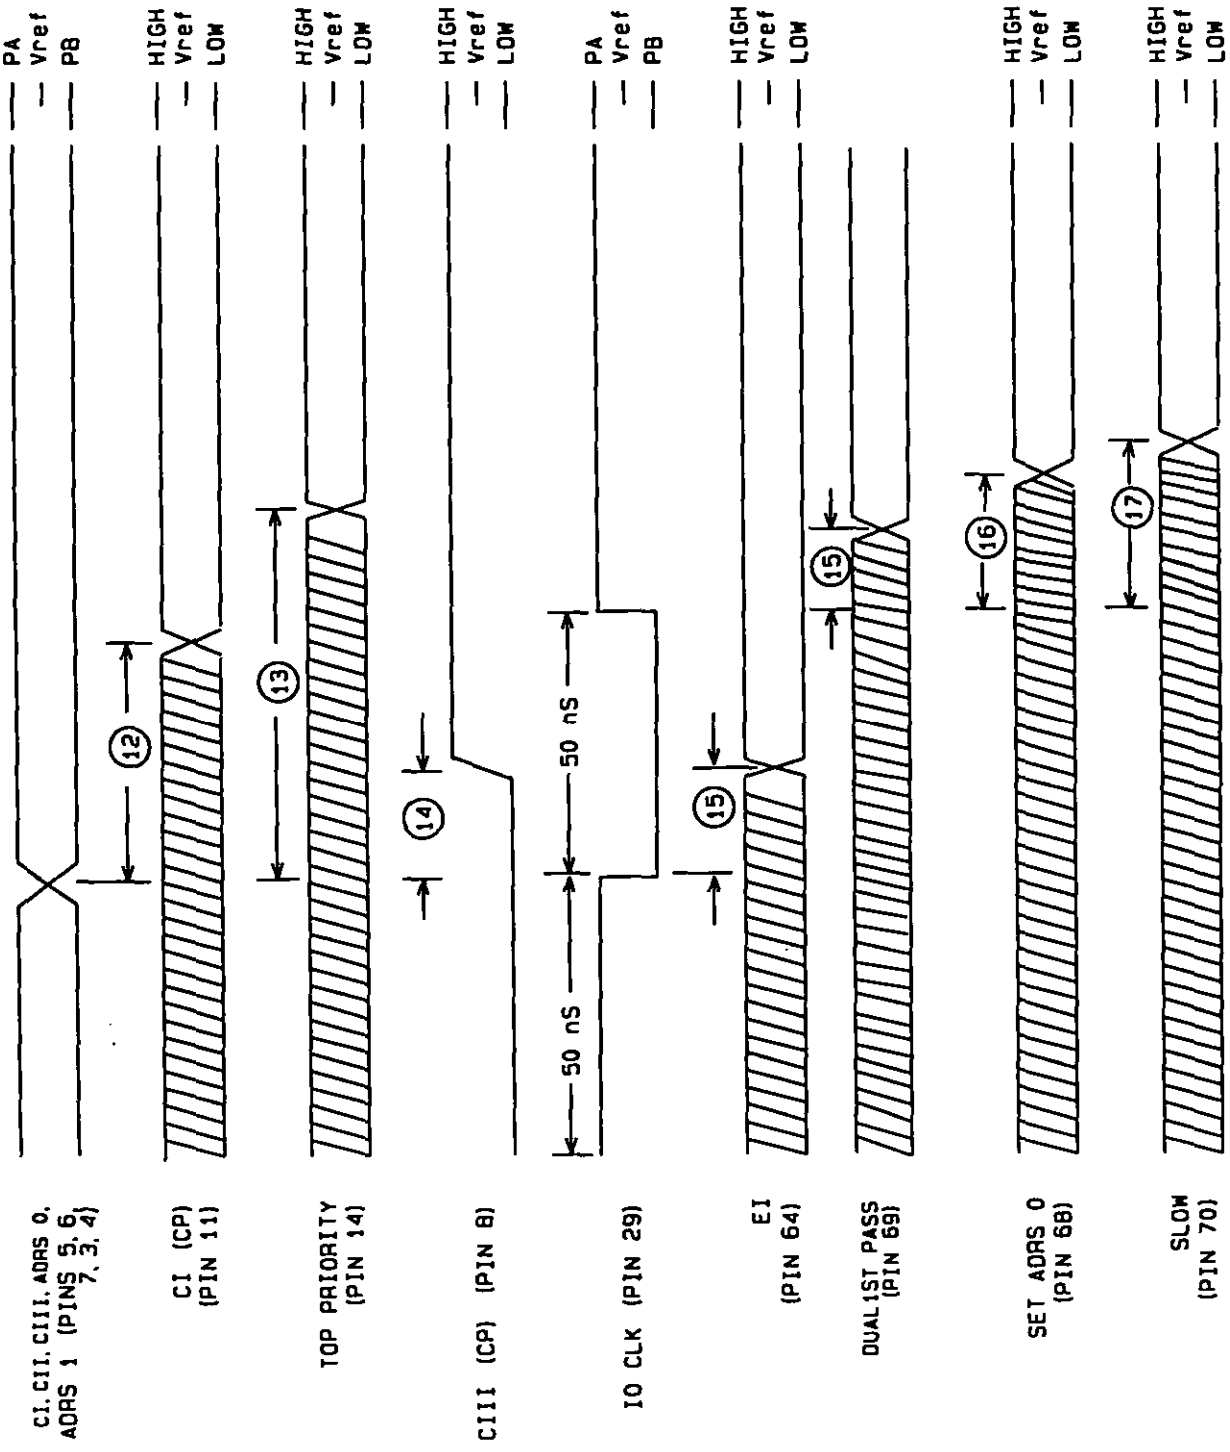


FIGURE 12c. Dynamic waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.

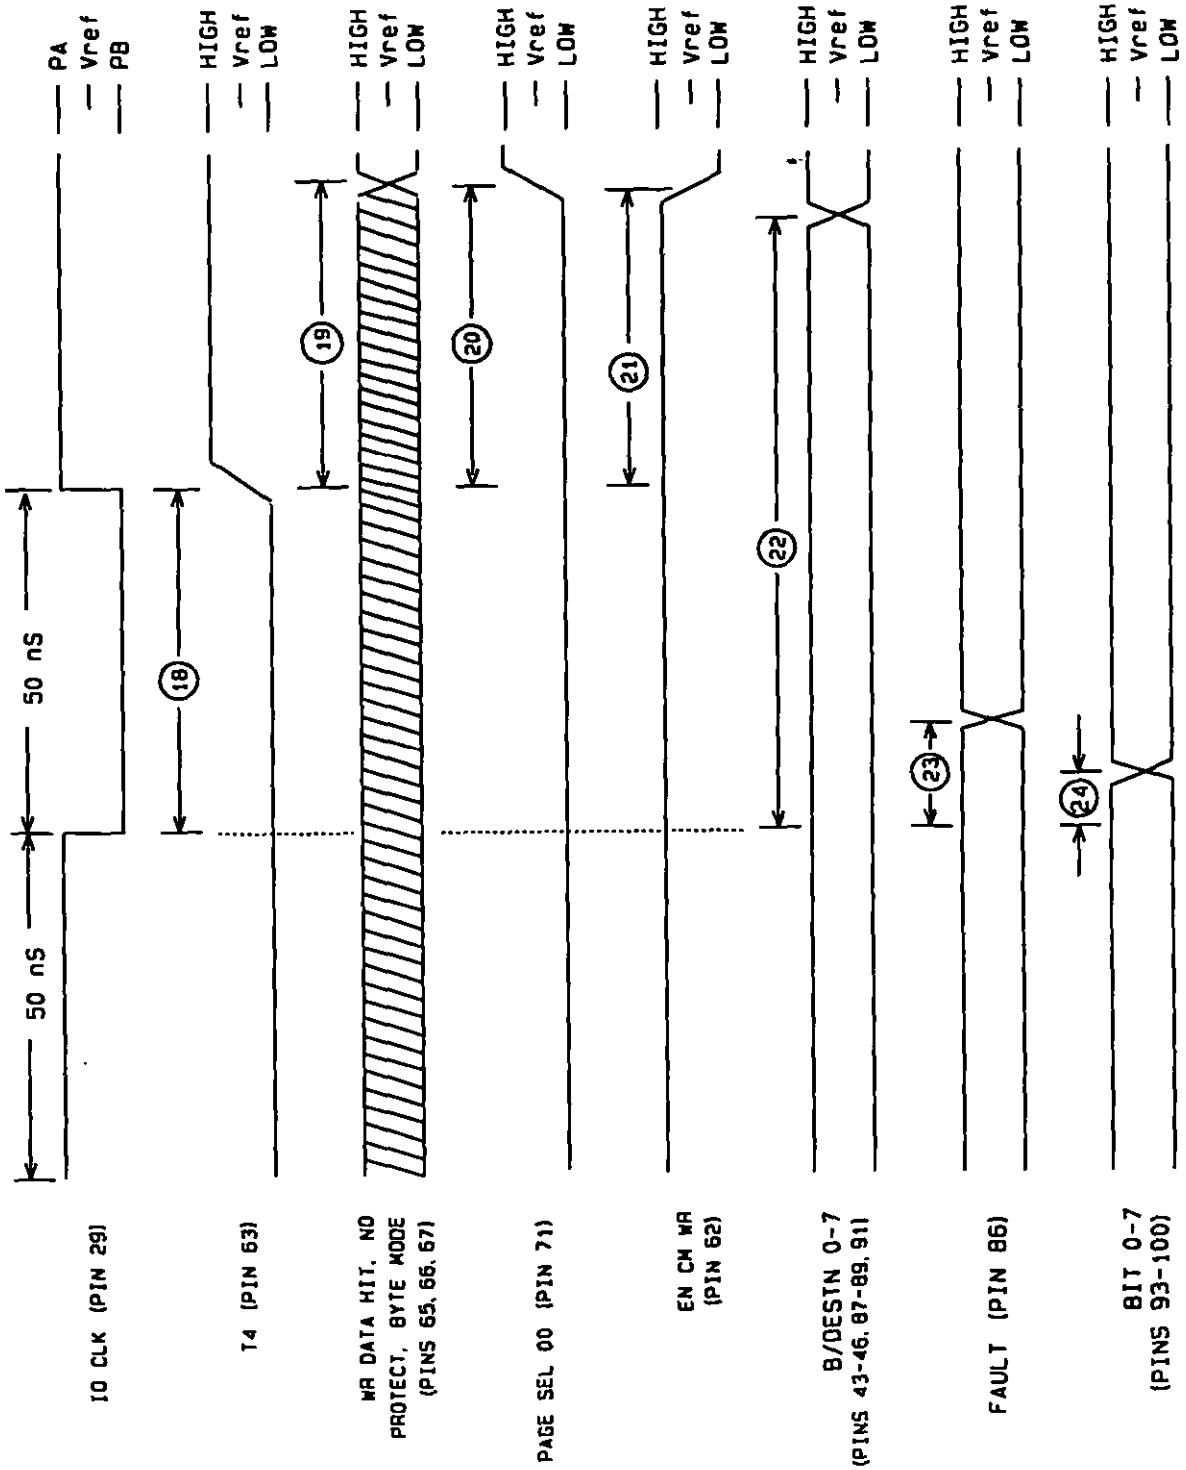


FIGURE 12d. Dynamic waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:22Z
Check the source to verify that this is the current version before use.

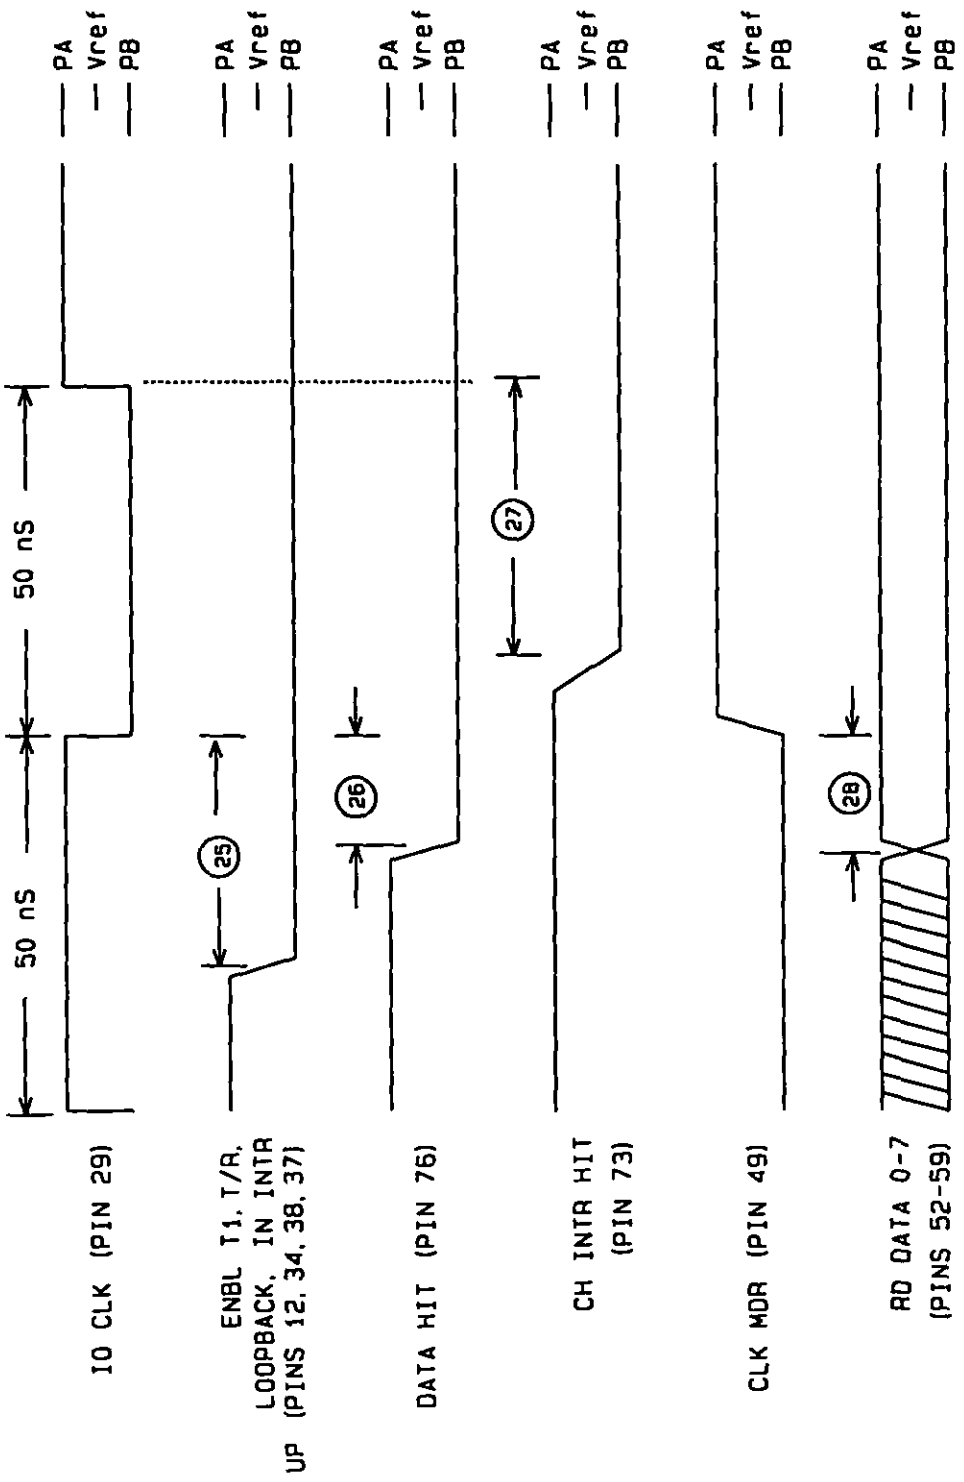


FIGURE 12e. Dynamic waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:22Z
Check the source to verify that this is the current version before use.