[INCH-POUND]
A-A-3034
October 10, 1996

COMMERCIAL ITEM DESCRIPTION

ROLLER, HAND (RUBBER ROLLER)

The General Services Administration has authorized the use of this Commercial Item Description for procurement of a hand roller specified in GGG-R-00620 (GSA-FSS) for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a hand roller with a rubber roller used in rubber cementing and vulcanizing work.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS

3.1 Design. The hand roller shall consist of a handle, yoke assembly, roller, ferrule, and bearings and shall be similar to Figure 1.

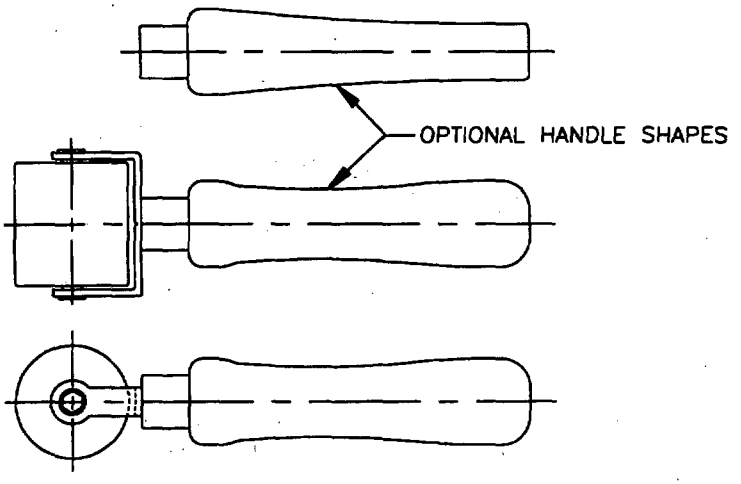


Figure 1. Roller, hand (rubber roller).

3.1.1 Roller. The roller shall consist of a steel core covered with rubber, synthetic rubber, or a combination thereof. The rubber thickness shall be not less than 11/32 inch. T he overall roller size shall be approximately 2 inches wide and 2 inches in diameter. The durometer hardness of the rubber roller shall be not less than 42 nor more than 60 when tested in accordance with ASTM D2240.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited. FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:28Z
Check the source to verify that this is the current version before use.

3.1.2 Yoke assembly. The roller core, yoke members, and the roller mounting(s) (one or two shafts or studs) shall be of steel construction. Those portions which form a part of the ball race shall be either through-hardened or case-hardened to such an extent that they are resistant to easy cutting with a file. (Testing with a file to determine that the ball race portions have been hardened will be considered adequate for hardness testing.)

3.1.3 Bearings. The hand roller shall be equipped with ball bearings at each end of the roller. When assembled, the ball bearings shall provide for free rolling of the roller when hand operated. At the option of the manufacturer, the ball races may be integral portions of the hand roller or they may be parts of the ball bearings.

3.1.4 Handle. The handle shall be of well-seasoned, straight-grained hardwood such as ash, hickory, or an equally hard wood. The exposed surfaces of the handle shall be coated with a clear lacquer or varnish so as not to conceal the grain of the wood. The handle shall be approximately 5-1/4 inches in length and 1-1/4 inches in diameter and formed to have a comfortable hand grip.

3.1.5 Ferrule. The ferrule shall be of steel or other suitable metal, shall have a rugged design, and, when attached, shall act as a support to prevent the handles from splitting or breaking. The ferrules shall be pinned, knurled, or otherwise mechanically locked in position on the handle to prevent becoming loose while in service.

3.1.6 Hardness. The hardness of the roller shall be 42-60 HRC. Failure to meet this requirement shall be cause for rejection of the roller and the lot it represents.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:28Z
Check the source to verify that this is the current version before use.

for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM D2240: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the roller specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN

5120-00-243-9401

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.