[INCH-POUND]
A-A-3080
June 10, 1997
SUPERSEDES
H-B-751C
January 18, 1973

COMMERCIAL ITEM DESCRIPTION

BRUSH, WINDOW

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This commercial item description (CID) covers round and rectangular horsetail hair brushes, without handles, for use in washing windows.

2. CLASSIFICATION. The window brushes shall be of the following types:

Type I - Round
Type II - Rectangular

3. SALIENT CHARACTERISTICS

3.1 Materials.

3.1.1 Block. The block shall be wood or plastic. The wood blocks shall be close grained and straight grained hardwood, and coated with a clear waterproof coating. The plastic blocks shall be a general purpose polypropylene. The wood blocks shall be smoothly finished and free of splinters or torn or loose grain. Plastic blocks shall be free from voids or channels.

3.1.2 Wire. All wire used in the setting of the tufts shall be composed of metal that is inherently corrosion resistant or that is plated to resist corrosion.

3.1.3 Filler. The filler shall be 100% horsetail hair. The horsetail hair shall be natural, extra stiff, straight, resilient, and black or gray. The horsetail hair shall be cleaned and sterilized prior to use in the block.

3.2 Construction. Both brushes shall have the filler secured in the tuft holes with the filler evenly trimmed. The tufts shall not be removable when pulled by hand.

3.2.1 Type I. The type I brush shall be configured as shown in figures 1 and shall meet the dimensional requirements for type I in table I. The type I brush block shall have two handle holes, each with a minimum depth of 1 inch, diametrically opposed to each other, and angled approximately 18° from the brush face of the block. One hole shall be threaded to accept a 3/4" (1.9 cm) diameter 5 threads per inch (2.5 cm) ACME threaded handle, the other hole shall be tapered to accept a handle tapered from 1 inch (2.5 cm) diameter to 3/4 inch (1.9 cm) diameter in 3 inches (7.6 cm).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.2.2 Type II. The type II brush shall be configured as shown in figure 2 and shall meet the dimensional requirements for type II in table I. The type II brush block shall have two handle holes, each with a minimum depth of 1 inch, centered on the long sides of the block directly opposite from each other, and angled approximately 45° from the brush face of the block. One hole shall be threaded to accept a 3/4" (1.9 cm) 5 threads per inch (2.5 cm) ACME threaded handle, the other hole other shall be tapered to accept a handle tapered from 1 inch (2.5 cm) diameter to 3/4 inch (1.9 cm) diameter in 3 inches (7.6 cm).

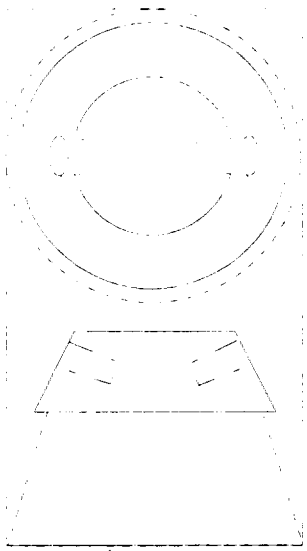


Figure 1
Type I

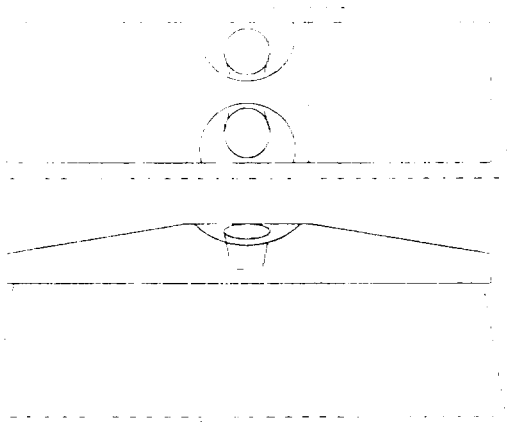


Figure 2
Type II

TABLE I. Physical requirements

Characteristic	Type I	Type II
Block		
Overall diameter	4-1/4" (10.8 cm) min	
Thickness		
Wood	1-5/8" (4.1 cm) min	
Plastic[1]	1-1/2" (3.8 cm) min	
Top diameter	3-1/8 ±1/4" (7.9 ±0.6 cm)	
Length		8 ±1/4" (20.3 ±0.6 cm)
Width		2-3/8 ±1/8" (6.0 ±0.3 cm)
Thickness		
Ends		7/8 ±1/8" (2.2 ±0.3 cm)
Center		1-7/8 ±1/8" (4.8 ±0.3 cm)
Horsehair		
Length clear of block	2-1/4" (5.7 cm) min	2-1/4" (5.7 cm) min
Weight per brush	4-7/32 oz (119 g) min	6 oz (170 g) min

[1] Hollowing of the top surface is permitted.

3.3 Workmanship. The brushes shall conform to the quality and grade of product established by this CID. Brushes shall be free from defects which may affect their durability, serviceability, or appearance.

3.4 Illustrations. The illustrations are included for convenience in identifying each brush type and are not intended to preclude designs otherwise meeting the requirements of this CID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Intended use. The brushes covered by this CID are intended to be used for washing windows.

7.2 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. Type.
c. The packaging, packing and marking desired

7.3 National Stock Numbers. The following NSNs are known to use this document:

NSN	Type
7920-00-240-7176	I
7920-00-297-1509	II

Preparing Activity
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.