INCH-POUND

A-A-3084A
February 5, 2002
SUPERSEDING
A-A-3084
November 7, 1996

COMMERCIAL ITEM DESCRIPTION

PROTRACTORS, MECHANICS, BEVEL AND PLAIN, RECTANGULAR HEAD


The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This Commercial Item Description covers protractors designed for precision measuring, checking, laying out of angular work, and scribing layout lines.

2. CLASSIFICATION. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The bevel and plain protractor shall have a rectangular head with graduations and a non-adjustable blade. The protractor shall be made of stainless or corrosion resistant steel, heat treated to produce a protractor capable of long life under service conditions.

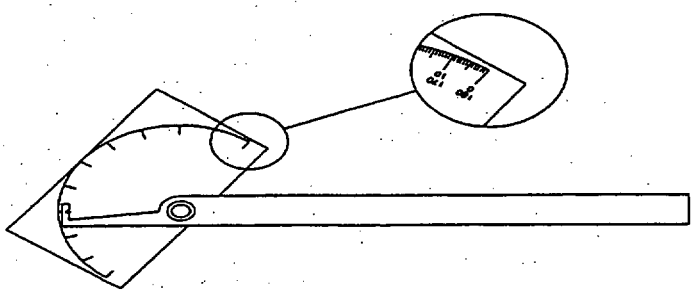

Protractor, plain, rectangular head.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd, Bldg #6, Kansas City, Missouri. 64131.

FSC 5210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.1.1 Head. The rectangular head shall have a length not be less than 3-1/4 inches or more than 3-3/8 inches, and a width not less than 1-7/8 inches or more than 2 inches. The protractor shall have four finished working edges and the surface shall be flat, parallel, and square within .005 inch as determined by means of a precision square and gage blocks. The flatness shall be determined with a test indicator in conjunction with a surface plate. It shall have two scales accurately graduated in degrees, reading in both directions from 0 to 180 degrees and shall be accurate within +/- 5 minutes between any two graduations. In addition, each graduation marking shall be within 15 minutes of its true reading determined by means of either a coordinate measuring machine, a sine bar, or angular blocks to ascertain the total angular error. All instruments shall be of proven accuracy, as certified by the National Institute of Standards and Technology (NIST) and performed at a constant temperature of 68 degrees F, +/- 10 degrees F.

3.1.2 Blade. The indicating arm of the blade shall have a line graduation for accurate setting and reading of the protractor. The length of the blade from the center of the stud hole shall not be less than 6 inches or more than 6 ¼ inches with a width of 5/8 inch and thickness of 1/16 inch. The working edges shall be accurately straight within .0005 inch as determined with a test indicator in conjunction with a surface plate of proven accuracy, as certified by the National Institute of Standards and Technology (NIST) and performed at a constant temperature of 68 degrees F, +/- 10 degrees F. The blade shall be mounted to the head in a manner to allow free and accurate positioning.

3.1.3 Thumbnut. A knurled thumbnut or other similar locking device shall be furnished to allow for adjusting tension and locking the blade at any position.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be etched, engraved, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practices. Paints, coatings, plating, and finishes shall be smooth, adherent, continuous and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g. pits, rips, fins, burrs, tears, nodules, cracks, or blisters), which may adversely impact the item's serviceability, durability, safety, or appearance

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The supplier/contractor is encouraged to use materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

4.2 Metric products. Products to metric dimensions will be considered on a equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified required. For product characteristics and requirements the provided product shall conform to the suppliers own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the supplier. If the supplier does not commercially offer the product, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspecting. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspection deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Requirements of preservation, packing, packaging, and marking of the packages shall be specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Addresses for obtaining copies of referenced documents.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

National Institute of Standards and Technology (NIST), Public Inquiries Unit, 100 Bureau Drive, Washington DC 20899-2100

7.2 National Stock Numbers (NSN). The following NSN corresponds to the item specified in this CID. This NSN may not be indicative of all possible NSNs associated with this CID.

NSN: 5210-00-273-3422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of Commercial Item Description.
(b) When applicable, the appropriate NSN.

7.4 Key words. Mechanics Rectangular Head Bevel and Plain Protractor.

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

Preparing Activity

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.