[INCH-POUND]
A-A-3117
April 3, 1998

COMMERCIAL ITEM DESCRIPTION

BADGE, PERSONAL IDENTIFICATION

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE

1.1 Scope. This commercial item description (CID) covers a folded clear plastic badge holder with safety pin to hold a 2" x 3" (51 mm x 76 mm) paper card.

2. SALIENT CHARACTERISTICS

2.1 General. The identification badge shall consist of a clear plastic holder, folded and creased to contain a paper card, a badge pin to attach the badge to the wearer, and the paper card inserts. The badge shall be configured similar to figure 1 and meet the dimensional requirements of table 1.

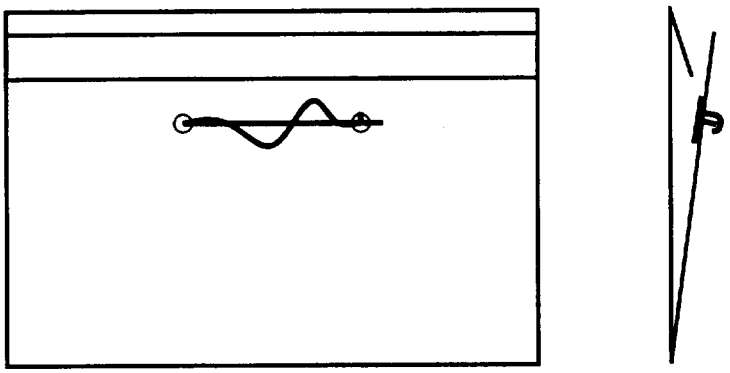


Figure 1

Table I, Physical characteristics.

Characteristic	Dimension
Plastic holder	
Thickness of plastic material	0.0065 inch (0.17 mm) minimum
Height of holder	2 +1/2 -0 inches (51 +13 -0 mm)
Width of holder	3 +1/2 -0 inches (76 +13 -0 mm)
Card	
Thickness of paper material	0.0075 inch (0.19 mm) minimum
Height	See "Card insert" paragraph
Width	See "Card insert" paragraph
Pin	
Wire diameter	0.040 inch (1.0 mm) minimum
Overall length	1-1/8 inch (29 mm) minimum

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

2.2 Plastic badge holder. The plastic badge holder shall be a transparent, clear, polished plastic, of the dimensions specified. The holder shall accommodate, display, and protect without obstruction, the card insert required. Each holder shall have a pin at the back positioned so the pin can fasten the holder to the wearers clothing with the 3 inch (76 mm) dimension being horizontal.

2.2.1 Flame test. The holder shall have a flammability rate not to exceed 300 mm/minute when tested in accordance with ASTM D635. Test results showing conformance supplied by the plastic material manufacturer shall be acceptable as evidence of compliance with this requirement. When it is necessary to test the material shorter than the required 100 mm, the flame test shall be modified as follows: The test shall encompass a distance of 50 mm instead of the required 100 mm. Section 7 and 8, replace 100 mm with 50 mm and perform test as specified.

2.3 Card insert. The card insert shall be made from white paper stock, cut so that the card fits inside the holder and is no more than 1/8 inch (3.2 mm) smaller than the holder in either width or length. The cards shall be cut in horizontally perforated strips of five cards minimum.

2.4 Pin. The badge pin shall be made from corrosion resistant metal wire or metal wire coated to resist corrosion. The pin shall be a double catch design (2 crimps).

2.5 Assembly. Each badge holder shall be constructed in accordance with the requirements of this CID, the badge pin shall be inserted into the back of the holder and closed, ready for use.

2.6 Workmanship. The plastic shall be clear, clean, and wrinkle-free. The pin shall be clean and rust-free without sharp projections other than the intended point. The paper shall be good quality white paper without visible impurities or other defects. The badge shall be free from defects that may affect appearance or serviceability.

2.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

3. REGULATORY REQUIREMENTS

3.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

5. PACKAGING, PACKING AND MARKING

5.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. The packaging, packing and marking desired.

6.2 Referenced documents.

ASTM D 635 - Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position

Copies of ASTM standards are available from ASTM, 100 Barr Harbor Dr., West Conshohocken, PA 19428-2959, (610-832-9500).

6.3 National Stock Numbers. NSN 8455-00-898-9730 utilizes this document:

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:30Z
Check the source to verify that this is the current version before use.