[INCH-POUND]
A-A-3119
July 15, 1997
SUPERCEDES
(see 7.4)

COMMERCIAL ITEM DESCRIPTION

BRUSH, PLATER'S, HAND (STRAIGHT BLOCK)

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This commercial item description (CID) covers wire brushes with a straight rectangular block.

2. CLASSIFICATION. The brushes shall be of the following classes as specified:

Class 1 - Carbon steel wire (7-1/2" (19 cm) block).
Class 2 - Carbon steel wire (4-1/2" (11 cm) block).
Class 3 - Copper-beryllium alloy wire.
Class 4 - Carbon steel flat wire (0.110 x 0.017 inch (2.79 x 0.43 mm))
Class 5 - Carbon steel flat wire (0.057 x 0.015 inch (1.45 x 0.38 mm))

3. SALIENT CHARACTERISTICS

3.1 Filler material.

3.1.1 Class 1 and 2. The class 1 and 2 filler material shall be a high carbon, round, oil tempered brush wire, 0.014 ±0.003 inch (0.36 ±0.07 mm) in diameter. The brush shall contain 1.1 ounce (31 g) minimum of this filler.

3.1.2 Class 3. The class 3 filler material shall be copper-beryllium alloy wire, 0.014 ±0.003 inch (0.36 ±0.07 mm) in diameter, with a tensile strength of 145,000 to 205,000 lbf/in^2 (1000 to 1400 MPa). The brush shall contain 1.0 ounce (28 g) minimum of this filler.

3.1.3 Class 4 and 5. The class 4 and 5 filler material shall be commercial, high carbon, oil tempered brush wire with a rectangular cross-section and a Rockwell Hardness of 82 to 87 on the 15-N scale. The class 4 brush wire shall be 0.11 x 0.017 inch (2.79 x 0.43 mm) minimum in cross-section size. The class 4 brush shall contain 17.5 ounces (496 g) minimum of this wire. The class 5 brush wire shall be 0.057 x 0.015 inch (1.45 x 0.38 mm) minimum in cross-section size. The class 5 brush shall contain 2.1 ounces (60 g) minimum of this wire.

3.2 Block (handle). The block shall be close grained, straight grained wood, or a general purpose impact resistant plastic.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

3.3 Construction. The block shall be one piece. The filler shall be staple set. The brush shall be similar in appearance to figure 1 and shall meet the requirements of table I. The filler shall be evenly spread across the brush face.

Table I, Dimensions

Characteristics	Class 1	Class 2	Class 3	Class 4	Class 5
Block					
Length, ±1/2 inches (±1.3 cm)	7-1/2 (19.1)	4-1/2 (11.4)	7-1/2 (19.1)	7-1/2 (19.1)	7-1/2 (19.1)
Width, ±1/4 inches (±0.6 cm)	2-3/8 (6.0)	1-3/4 (4.4)	2-1/2 (6.4)	2-1/2 (6.4)	2-1/2 (6.4)
Thickness, minimum	7/8 inch (2.2 cm)	7/8 inch (2.2 cm)	7/8 inch (2.2 cm)	7/8 inch (2.2 cm)	7/8 inch (2.2 cm)
Number of tuft holes, min.	114	40	114	50	50
Number of tuft rows	6	4	6	5	5
Length of filler clear of block, minimum	1-5/8 in (4.1 cm)	1-1/4 in (3.2 cm)	1-5/8 in (4.1 cm)	1-1/2 in (3.8 cm)	3 in (7.6 cm)

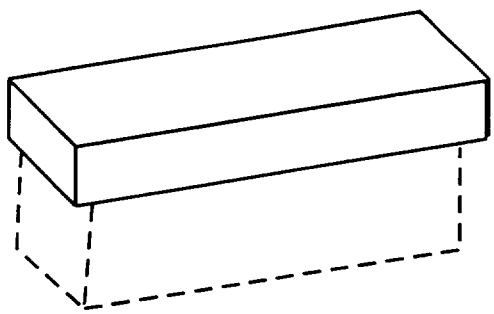


Figure 1

3.4 Workmanship. The brushes shall be clean and free of defects that may affect appearance or serviceability. The filler shall be evenly trimmed to form a flat surface.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. Class.
c. The packaging, packing and marking desired.

7.2 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

Example: AA3119/1
| |_____ Class 1, 2, 3, 4, or 5
|
CID A-A-3119

7.3 National Stock Numbers. The following NSNs (with the appropriate part number) are known to use this document:

NSN	Part Number
7920-00-246-8501	AA3119/1
7920-00-262-8602	AA3119/2
7920-00-269-0933	AA3119/3
7920-00-178-8310	AA3119/4
7920-01-067-6189	AA3119/5

7.4 Supersession data. This CID supercedes H-B-178D/GEN dated May 10, 1976, and H-B-178/4 dated May 10, 1976.

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.