
This military standard is approved for use by the Naval Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

FED. SUP CLASS
6240

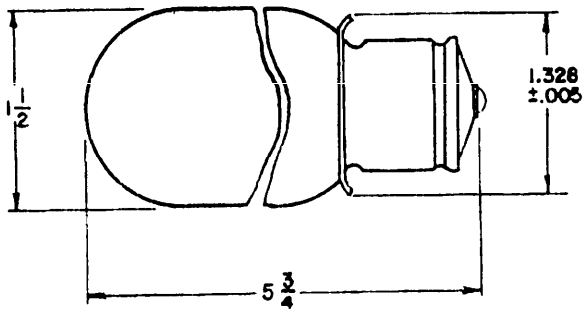


| MS part number | (B) Ind. No. |
|---|---|
| MS15555-1 | DDB |
| MS15555-2 | DFD |

Characteristic

| | (B) Industry No. | DDB 1/ | DFD 1/ |
|---|---|---|---|
| | Watts | 750 | 1000 |
| | Volts | 120 | 120 |
| | Bulb | T-12 | T-12 |
| | Finish | Clear, opaque coating on end | Clear, opaque coating on end |
| | Base | Medium, prefocusing single contact | Medium, prefocusing single contact |
| | Filaments | C-13D | C-13D |
| | Light center/length (inches) 2/ | 2-3/16 | 2-3/16 |
| | Hours life (approximate) | 25 | 10 |

1/ Should be used only in equipment that provides adequate forced cooling.

2/ Distance from center of light source to top of base fin.

(B) Denotes changes

APPROVED 2 AUG 1954 REVISED (A) 27 JUN 1956 (B) 3 APR 1978

| P. A. SH Other Cust | INTERNATIONAL INTEREST | TITLE: LAMPS, INCANDESCENT, T-12, MEDIUM PREFOCUSING, SINGLE CONTACT | MILITARY STANDARD |
|---|---|---|---|
| | | | MS15555(SH) |
| PROCUREMENT SPECIFICATION: NONE | SUPERSEDES: | | Page 1 of 1 |

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

6240-N288

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:48Z
Check the source to verify that this is the current version before use.