
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS
6240

(A) This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TS-87. The item covered herein is for replacement purposes only and shall not be used in the design of new equipment.

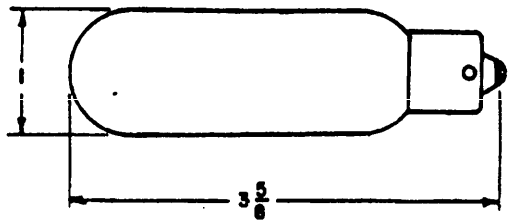

Characteristic	Type TS-87
Watts	150
Volts	120
Bulb	T-8
Finish	Clear
Base	Bayonet candelabra, single contact
Filaments	2CC-8
Light center length (inches)✓	1-3/8
Hours life (approximate)	25
Lumen output (approximate)	3300
Use	Magnavox, illustrovox junior, 35 mm. strip film.

✓ Distance from center of light source to top of base pins.

(A) Deleted overall length data in characteristics.

APPROVED 2 AUG 1954 REVISED (A) 27 JUN 1958

MS part number	FIIN
MS15561-1	143-3106

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS15561 (SHIPS)
Ships	A - N - AF -	LAMP, INCANDESCENT, T-8, BAYONET CANDELABRA, SINGLE CONTACT	
Procurement Specification: None		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672
1 OCT 52

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/8145

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:48Z
Check the source to verify that this is the current version before use.