
FED. SUP CLASS 1670

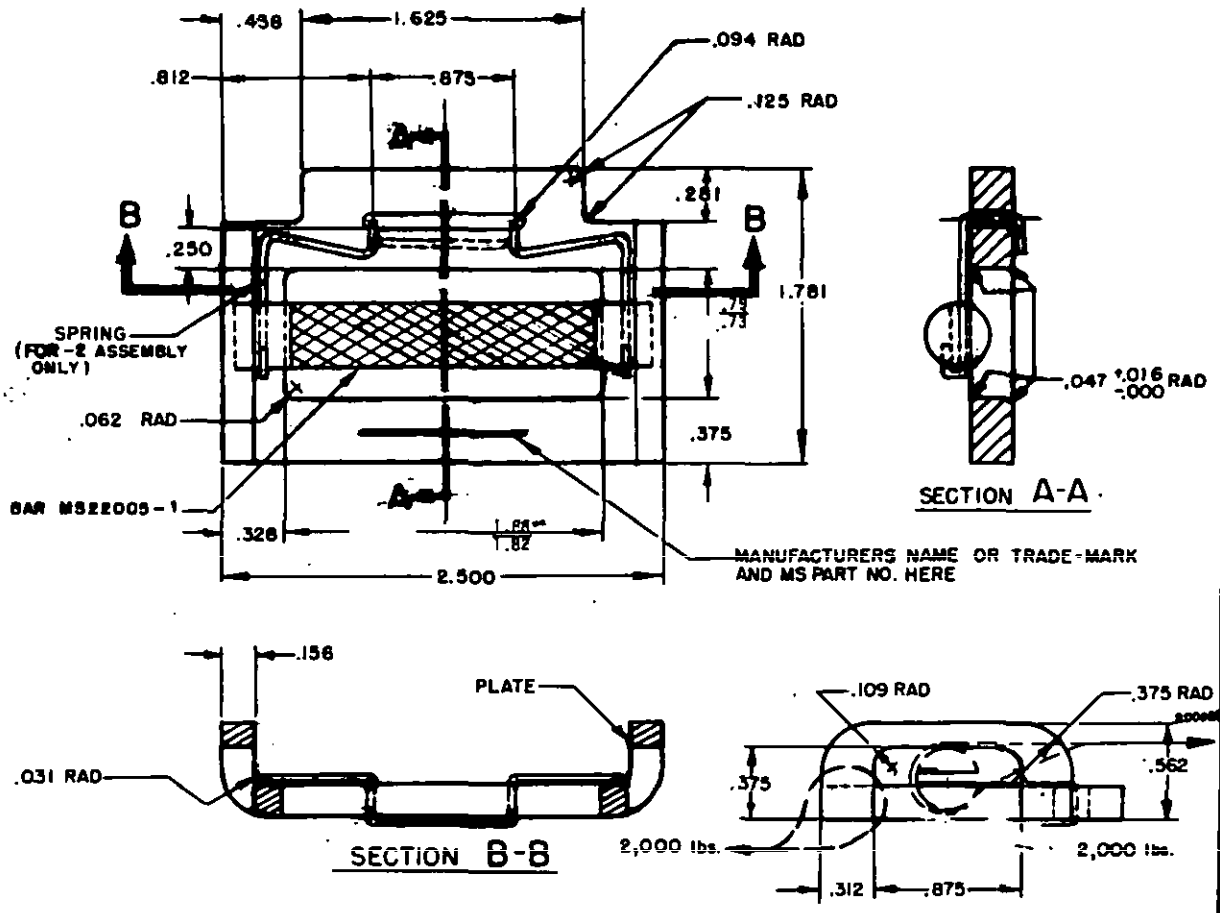

MS ASSEMBLY PART NO.	TITLE
MS22007-1,-3	ADJUSTER ASSEMBLY (WITHOUT SPRING)
MS22007-2,-4	ADJUSTER ASSEMBLY (WITH SPRING)

1. MATERIAL: PLATE; STEEL, SPECIFICATION MIL-S-5626, OR MIL-S-6049, OR MIL-S-18729.
   SPRING; STEEL, MUSIC, WIRE, .045 DIA, SPECIFICATION QQ-W-470.
2. HEAT TREAT: PLATE; SPECIFICATION MIL-H-6875, ROCKWELL C38 TO C42.
3. (J) FINISH PLATE:
   -1, -2; CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE 1, CLASS 2 DECARBURIZATION SHALL NOT EXCEED .010.
   -3, -4; PHOSPHATE COATING, DOD-P-16232, TYPE Z, CLASS 4 FOLLOWED BY WAX EMULSION MIL-W-3688.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. ADJUSTER SHALL BE SMOOTH AND FREE FROM FINS AND PITS.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016
7. ADJUSTERS SHALL BE SUBJECTED TO THE PROOF LOADS SPECIFIED HEREON AS INDICATED BY THE ARROWS. WEBBING, NYLON, SPECIFICATION MIL-W-4088, TYPE VIII SHALL BE UTILIZED DURING PROOF LOADINGS. PROOF LOADS SHALL BE APPLIED AT THE RATE OF 30,000 POUNDS PER SQUARE INCH PER MINUTE, IN ACCORDANCE WITH SPECIFICATION QQ-M-151.

(CONTINUED ON PAGE TWO)

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID. (J) FOR CHANGES SEE SHEET 1.

APPROVED 4 Mar 53 REVISED (A) 26 Oct 53 (B) 9 Jul 54 (C) 12 Apr 55 (D) 10 Nov 69 (E) 18 Feb 72 (F) 7 Dec 72 (G) 11 Apr 75 (H) 31 Jan 79 (J) 2 JAN 86


P.A. AIR FORCE - 82 Other Cust (J) Navy - AS Army - AV AF - 99.	TITLE ADJUSTER ASSEMBLY, SAFETY SHOULDER HARNESS BELT	MILITARY STANDARD MS22007
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF DRAWING 4449569, NAF DRAWING 311926-1 AND AF DRAWING 65034083	SHEET 1 OF 2

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This Military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document. Review activities:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

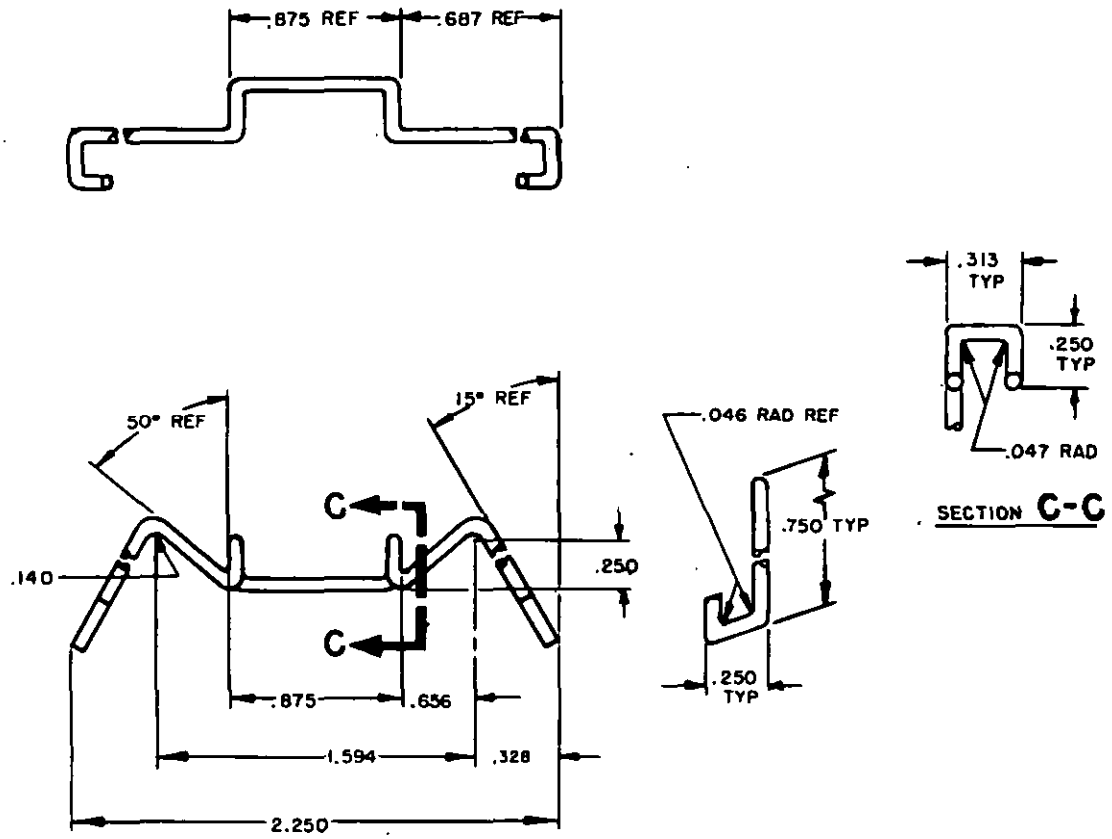

SPRING WEBBING RETARDER

8. END ITEM EXAMINATION

A. CRITICAL DIMENSIONS: AS SHOWN *

B. CRITICAL FUNCTIONAL TESTS: WITHOUT SPRING, BAR SHALL MOVE FREELY.

C. PROOF LOAD METHOD: AS SHOWN (WITHOUT SPRINGS) USING SUITABLE FIXTURES.

D. OPTIONAL MATERIAL: SPRING; STEEL WIRE PER QQ-W-423.

E. MANUFACTURE IN ACCORDANCE WITH MIL-H-7195.

APPROVED 4 Mar 53 REVISED (J) FOR CHANGES SEE SHEET 1

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE 82 Other Cust Army - AV Navy - AS AF - 99 (J)	TITLE ADJUSTER ASSEMBLY, SAFETY SHOULDER HARNESS BELT	MILITARY STANDARD MS22007
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF DRAWING 44A9569 AND NAF DRAWING 311926-1 AND AF DRAWING 65D34083	SHEET 2 OF 2

DD FORM 672-1 (Coordinated) Previous editions of this form are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.