


FED. SUP CLASS.
5945

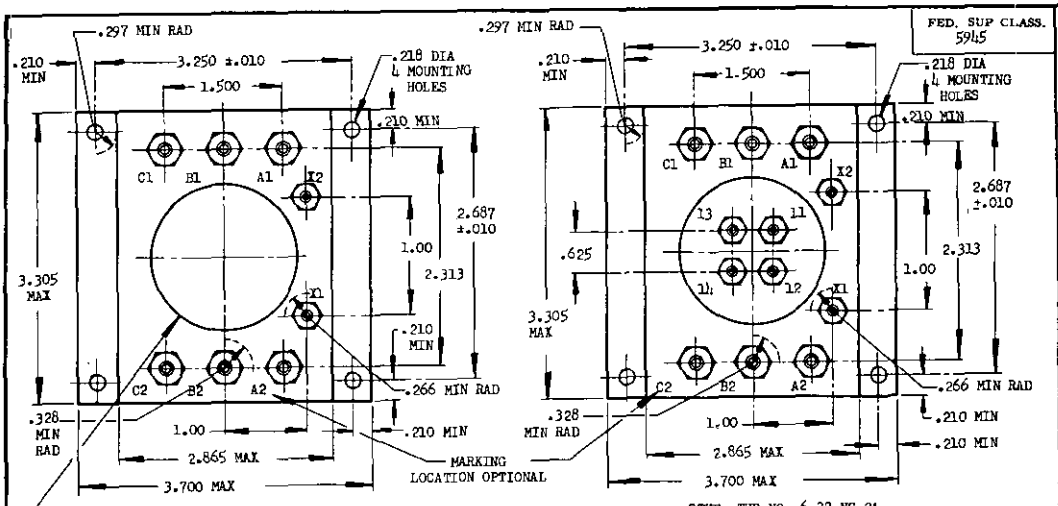

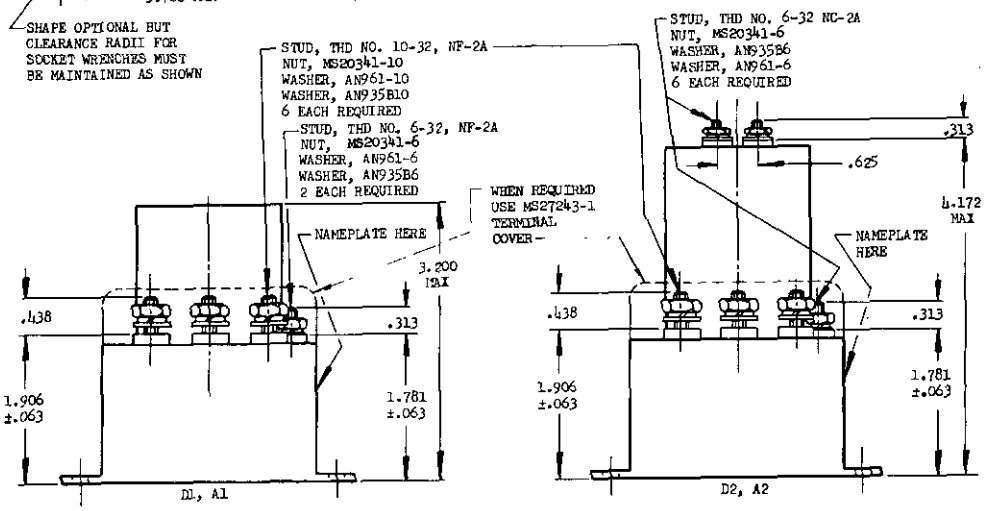



DASH NO.		COIL	TYPE	WEIGHT LB MAX
D1		DC	NO AUX CONTACTS	1.4
D2			WITH AUX CONTACTS	1.5
A1		AC	NO AUX CONTACTS	1.5
A2			WITH AUX CONTACTS	1.7

CANCELLED AFTER JANUARY 21,1969. NO SUPERSEDING STANDARD.

CONTACT RATED LOAD (AMPERES PER POLE)

TYPE OF LOAD	28 VOLTS DC					115 VOLTS 400-CYCLE AC					115/200 VOLTS 400-CYCLE AC					28 VOLTS DC OR 115 VOLTS AC AUXILIARY CONTACTS				
	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10
RESISTIVE	25	25				25	25				25	25				5	5			
INDUCTIVE	25	25														5	5			
MOTOR	25	25				25	25				25	25								
LAMP																1	1			
MINIMUM	2.5	2.5				2.5	2.5				2.5	2.5				MIN CURRENT PER SPEC				

REVISED (A) 10 Apr 65 (B) 21 Jan 69

APPROVED 30 Aug 57

Review activities: Navy - AS USAF - 85

The military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust USAF - 85	TITLE RELAY, 25 AMP, 3PST, NORMALLY OPEN, CLASS A8, SEALED	MILITARY STANDARD MS24190 (ASG)
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

(A)	MIN OPERATING CYCLES	50,000
(B)	MAX OPERATING TIME	.020 SEC
(C)	MAX RELEASE TIME (DC)	.01 SEC
(D)	MAX RELEASE TIME (AC)	.05 SEC
(E)	MAX DURATION OF CONTACT OPENING DURING SHOCK TEST	.002 SEC
(F)	MAX DURATION OF CONTACT BOUNCE	.002 SEC
(G)	RED STRIPE UNDER NAMEPLATE REQUIRED FOR RELAY WITH A-C COILS	

COIL		NOMINAL	MAXIMUM	PICKUP	DROPOUT
DC	VOLTAGE	28	29	18	7+0, -5.5
	CURRENT		.50		
AC	VOLTAGE	115	120	90	30+0, -20
	CURRENT				

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 30 Aug 57 REVISED (B) FOR CHANGES SEE SHEET 1

Review activities: Navy - AS, USAF - 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust USAF - 85	TITLE RELAY, 25 AMP, 3PST, NORMALLY OPEN, CLASS A6, SEALED	MILITARY STANDARD MS24190 (ASG)
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES:	SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.