
FED. SUP CLASS. 5010

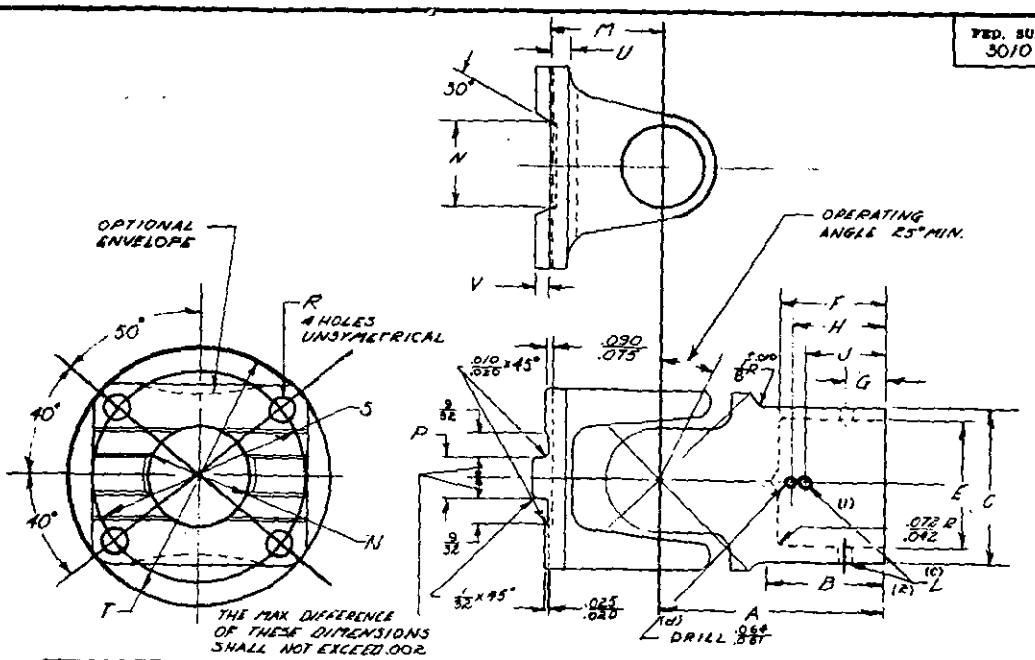

DIMENSIONS-ROUND HUB

MS PART NO.	(a) FIIN	NOM SIZE	A	B	C DIA +.000 -.002	E DIA +.004 -.001	F	G	H	J	L PILOT HOLE DRILL
MS24313-12		3/4	1.313	19/32	.745	.625	13/16	.219	.793 .790	.531	F 5/32
MS24313-16		1	1.750	1 1/16	.995	.812	1	.281	.942 .937	.656	7/32
MS24313-20		1 1/4	1.938	1 1/8	1.245	1.062	1 1/16	.312	1.005 1.000	.688	7/32
MS24313-24		1 1/2	2.312	1 5/16	1.495	1.250	1 3/16	.344	1.130 1.125	.781	9/32
MS24313-28		1 3/4	2.563	1 5/16	1.745	1.375	1 1/16	.531	1.255 1.250	.969	9/32
MS24313-32		2	2.813	1 1/2	1.995	1.625	1 1/16	.656	1.380 1.375	1.094	9/32

DIMENSIONS - FLANGE YOKE

NOM SIZE	M ±.010	N DIA ±.001	P ±.0005	R DIA +.003 -.001	S DIA	T SWING DIA	U	V
3/4	.875	1.251	.3729	.203	2.250	2 13/16	3/16	.125
1	.875	1.251	.3729	.203	2.250	2 13/16	3/16	.125
1 1/4	.873	1.251	.3729	.203	2.250	2 13/16	3/16	.125
1 1/2	1.062	1.501	.3729	.266	2.562	3 1/16	7/32	.125
1 3/4	1.250	1.501	.4979	.266	2.937	3 9/16	1/4	.155
2	1.250	1.501	.4979	.266	2.937	3 9/16	1/4	.155

STATIC TORQUE MAXIMUM LB. IN	WEIGHT JOINT TOTAL MAX LBS.
1500	.20
3000	.45
7500	.80
11000	1.25
15000	2.00
20000	3.00

(a) FEDERAL ITEM IDENTIFICATION NO.
(b) B DIMENSION IS LENGTH OF STRAIGHT CYLINDRICAL SECTION.
(c) CENTER LINE OF PILOT HOLE (1) SHALL LIE IN A DIRECTION PARALLEL TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0°30'. CENTER LINE OF PILOT HOLE (2) SHALL BE PERPENDICULAR TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0°30'.
(d) CENTER LINE OF INSPECTION HOLE SHALL LIE IN A DIRECTION PARALLEL TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0°30'.

MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
REMOVE ALL BURRS AND SHARP EDGES.
ALL DIMENSIONS TO BE MET AFTER PLATING.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±0°15'
THE TWO YOKES OF THE ASSEMBLED UNIVERSAL JOINT SHALL BE CONCENTRIC TO EACH OTHER WITHIN .015 TIR.
ADD-N BEFORE DASH NO. FOR JOINTS WITHOUT PREDRILLED PILOT HOLES.
EXAMPLE OF PART NOS: MS24313-12 = 3/4 IN. NOMINAL HUB WITH PREDRILLED PILOT HOLES;
MS24313-N-12 = 3/4 IN. NOMINAL HUB WITHOUT PREDRILLED PILOT HOLES.
ALL MACHINED SURFACES MUST BE SMOOTH 63 MAX. AND FREE FROM TOOL MARKS.
"C" & "N" DIMENSIONS TO BE CONCENTRIC WITHIN 0.005 TIR

"THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN."

Ⓐ CANCELLED AFTER 15 AUG 1977 NO SUPERSEDING STANDARD Ⓐ DENOTES CHANGES

APPROVED 6 FEBRUARY 1968 REVISED Ⓐ 15 AUG 1977

CUSTODIANS: Army - MU Navy - Baker Air Force

OTHER INT. A - ET N - On

MILITARY STANDARD

UNIVERSAL JOINT, ANTIFRICTION BEARING, FLANGE HUB

MS24313

PROCUREMENT SPECIFICATION MIL-U-3963

SUPERSEDES:

SHEET 1 OF 1

DD FORM 472-1 1 OCT 52

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specification, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/2721

Source: https://assist.dla.mil -- Downloaded: 2026-03-27T14:51Z
Check the source to verify that this is the current version before use.