This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

P.A. USAF - AFSC

Other Cust
Navy - Mep

TITLE

RING, SPLIT - TYPE MA-2, FLIGHT PRESSURE REFUELING, RECEPTACLE COUPLING


PROCUREMENT SPECIFICATION
MIL-C-25162

DD FORM 672-1 (Limited coordination)

Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 20260-23T14:57Z

MILITARY STANDARD

MS24361(ASG)

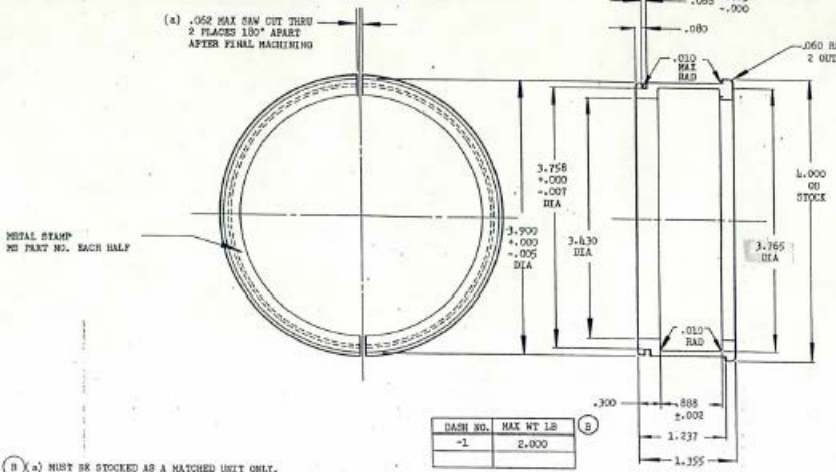

DASH NO.	MAX WT LB
-1	2.000

(B) (a) MUST BE STOCKED AS A MATCHED UNIT ONLY.

MATERIAL: 4130 CHROME-MOLY STEEL TUBING, REGULAR GRADE, TYPE I, CONDITION N, SPECIFICATION MIL-T-6736.

FINISH: CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS B.

SURFACE ROUGHNESS: 125 ALL SURFACES PRIOR TO PLATING, MIL-STD-10.

REMOVE ALL BURRS AND BREAK SHARP EDGES .010 TO .020.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FED. SUP. CLASS 1560

APPROVED 18 May 56 REVISED (A) 10 Apr 57 (B) 15 May 61

GP 1

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.