

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-STD-809


Form approved
OMB No. 0704-0188

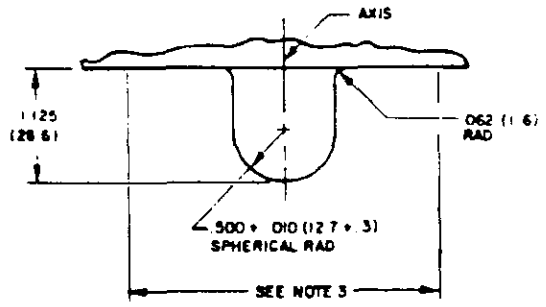


TYPE I - PRIMARY FLIGHT STRUCTURE ADAPTERS FOR REACTIONS LESS THAN 10,000 LBS (44.5 kN)

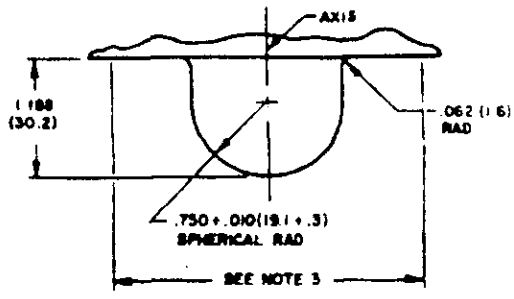


TYPE II - PRIMARY FLIGHT STRUCTURE ADAPTERS FOR REACTIONS OF 10,000 (4536 kN) TO 12,000 (500 kN).

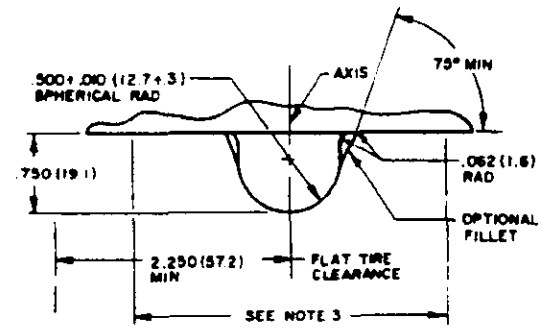


TYPE III - AXLE ADAPTERS FOR REACTIONS LESS THAN 10,000 LBS (44.5 kN).

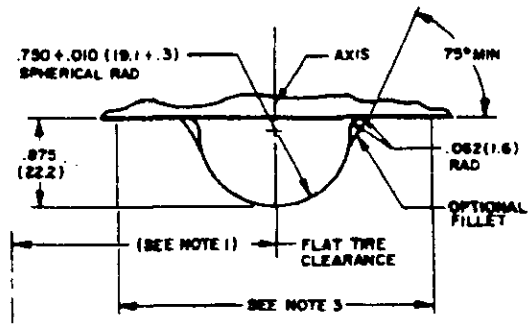

TYPE IV - AXLE ADAPTERS FOR REACTIONS OF 10,000 LBS (44.5 kN) TO 150,000 LBS. (667 kN).

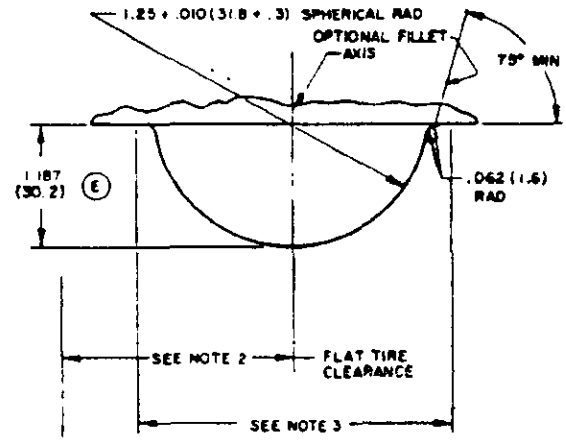

TYPE V - AXLE ADAPTERS FOR REACTIONS OF 150,000 LBS. (667 kN) TO 250,000 LBS (1,112 kN)

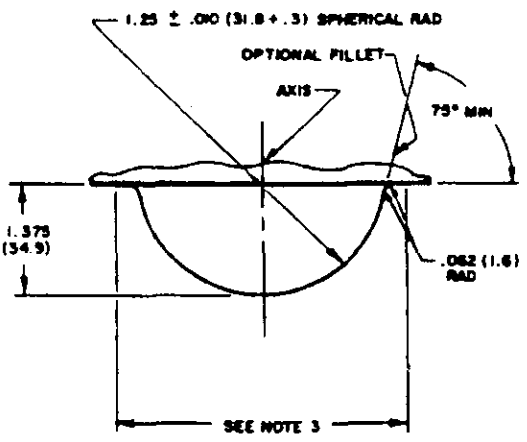

(E)

TYPE VI - PRIMARY FLIGHT STRUCTURE ADAPTERS FOR REACTIONS OF 12,000 LBS. (500 kN) TO 250,000 LBS. (1,112 kN).

(E) DENOTES CHANGE

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY-AV NAVY - AS AIR FORCE-99 DLA- REVIEW: AF - 11 USER: NAVY - MC PROJECT NUMBER: 1730-0310	MILITARY SPECIFICATION SHEET TITLE: ADAPTER, AIRCRAFT, JACKING POINT, DESIGN AND INSTALLATION OF	SPECIFICATION SHEET NUMBER MS33559E 24 MAR 1989 SUPERSEDING MS33559D AMSC- N/A FSC 1730

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-STD-809

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

1. 3.000 INCHES (76.2) CLEARANCE SHALL BE PROVIDED FOR REACTION LOADS UP TO 10,000 LBS (44.6 kN). THIS CLEARANCE DIMENSION SHALL BE INCREASED BY 1/2 INCH (12.7) FOR EACH 12,000 LBS (534 kN) OF ADDITIONAL REACTION LOAD.
(E) 2. 4.50 INCHES (1143) MINIMUM WHEEL OR TIRE CLEARANCE SHALL BE PROVIDED FOR REACTION LOADS OF 150,000 LBS (667 kN) AND ABOVE.
(E) 3. FOR THE ADAPTERS THERE SHALL BE A MINIMUM DIAMETER CLEARANCE SUITABLE FOR THE TOP OF THE MATING JACK AS FOLLOWS:

ADAPTER TYPE	IN(MM)
I THRU IV	3.00 (76.2)
V	9.00 (228.6)
VI	12.00 (304.8)

4. DIMENSIONS ARE IN INCHES FOLLOWED BY BRACKET, METRIC IN (mm) UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031 (.8), ANGLES ±.5°. THE PREFERRED METRIC UNITS GIVEN IN THE BRACKETS ARE IN ACCORDANCE WITH FED-STD-376.
5. THIS STANDARD COMPLEMENTS AND IS A PART OF THE REQUIREMENTS OF MIL-STD-809.
6. THIS IS A DESIGN STANDARD DEFINING THE INTERFACE BETWEEN THE JACKING POINT ADAPTER ON THE AIRCRAFT AND THE JACK HEAD.
7. CERTAIN PROVISIONS (ADAPTER BALL-SHAPED DESIGN AND CLEARANCE DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 25/7, STANAG 3098 AND ISO 43. WHEN AMENDMENT, REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED, WHICH WILL MODIFY THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.
(E) 8. THE MATING SOCKET ON THE JACK HEAD FOR THE ADAPTERS SHALL BE AS FOLLOWS:

ADAPTER TYPES	USAF DRAWING NO. AND TITLE
I THRU IV	5686129 BALL TYPE JACK PAD SOCKET
V AND VI	---

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY-AV NAVY- AS AIR FORCE-99 DLA- REVIEW: USAF - 11 USER: NAVY - MC PROJECT NUMBER: 1730-0310	MILITARY SPECIFICATION SHEET TITLE: ADAPTER, AIRCRAFT, JACKING POINT, DESIGN AND INSTALLATION OF	SPECIFICATION SHEET NUMBER MS33559E 24 MAR 1989 SUPERSEDING MS33559D AMSC- N/A FSC: 1730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.