


FED. SUP CLASS
1680

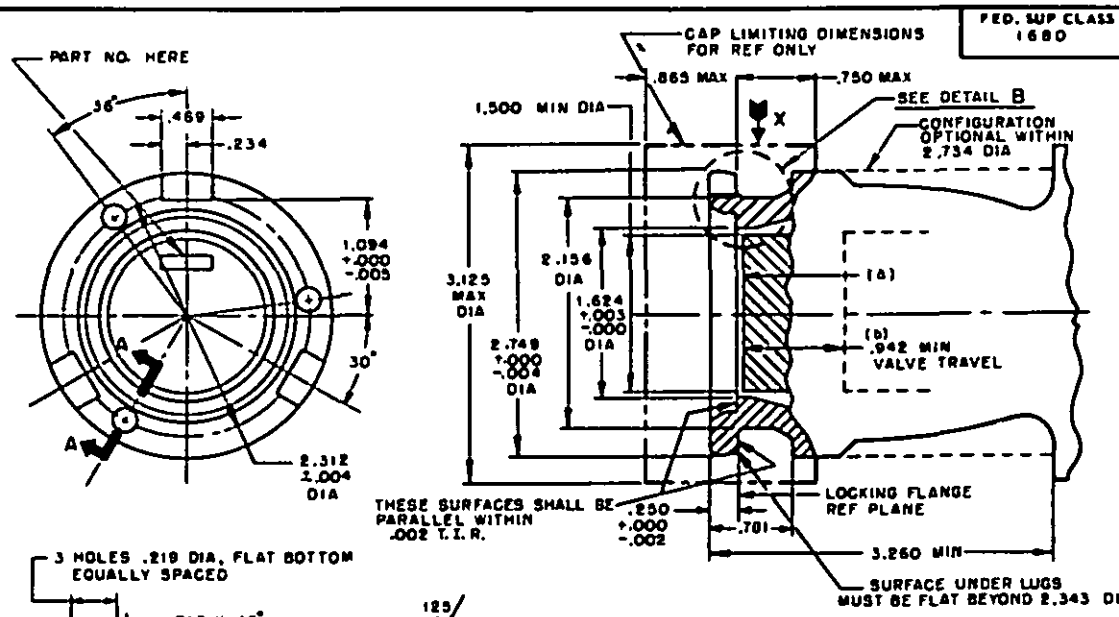




SECTION A-A
ENLARGED





DETAIL B
VALVE SEAT
ENLARGED

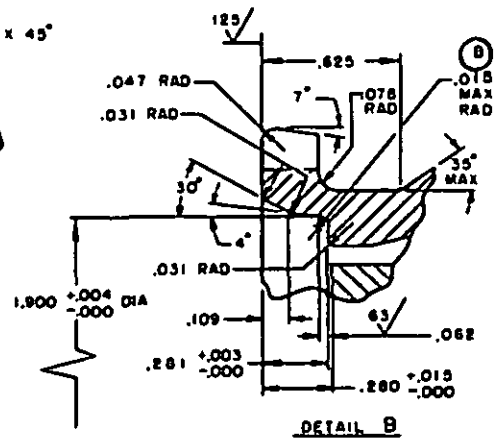

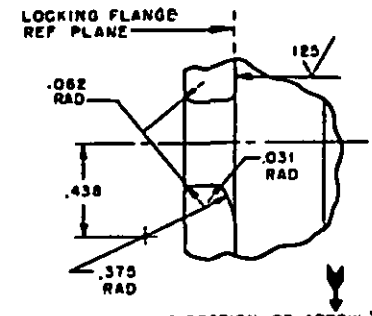
VIEW IN DIRECTION OF ARROW X
3 IDENTICAL SLOTS
ENLARGED

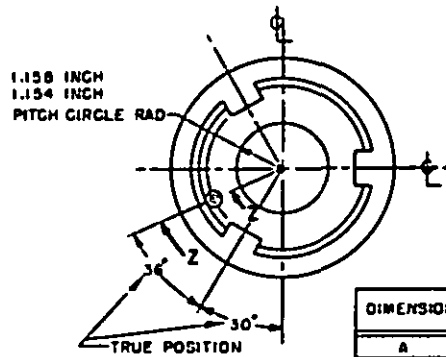


| DIMENSION | MINIMUM INCHES | MAXIMUM INCHES |
|---|---|---|
| A | .182 | .192 |
| B | .089 | .099 |
| C | .057 | .067 |

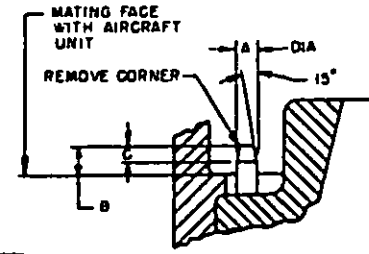


SECTION OF SELECTIVE PIN ON Z-Z

DETAILS OF SERVICING NOZZLE

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 28 Oct 68 REVISED (A) 9 Mar 76 (B) 15 AUG 77

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Air Force - 11<br>Other Cust<br>Navy - AS | ASCC<br>AIR STD 17/31<br>(STANAG 3603<br>ASP) | COUPLING, REPLENISHMENT, 1-1/2 INCH, FOR METHANOL-WATER, (DETAILS OF SERVICING NOZZLE) | MS33669 |
| PROCUREMENT SPECIFICATION<br>NONE | | SUPERSEDES | SHEET 1 OF 2 |


Project No. 1680-0459

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

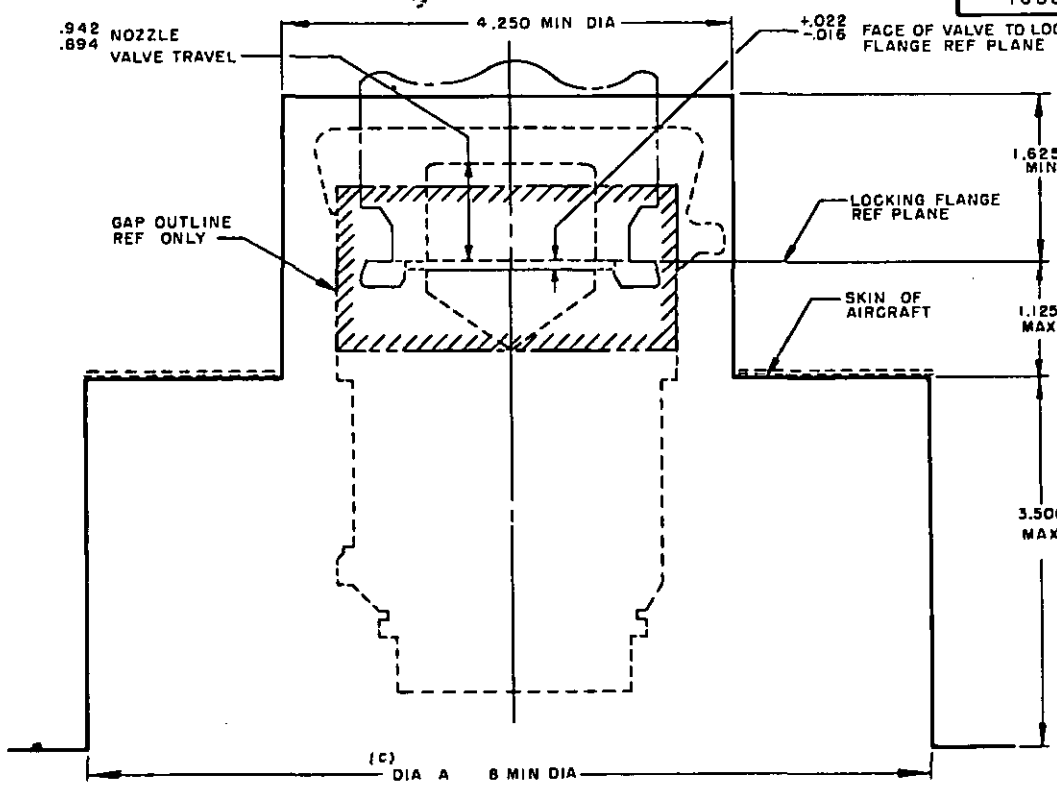


INSTALLATION REQUIREMENTS
1-1/2 INCH CONNECTION

(d) CONFIGURATION OF THE VALVE BEHIND THIS FACE IS OPTIONAL.

(b) VALVE SHALL BE SPRING LOADED. LOADING AT .942 TRAVEL SHALL NOT EXCEED 22 LB. LOADING IN SHUT POSITION 9 TO 11 LB.

(c) DIA A (AND FIRM OUTLINE) REPRESENTS THE CLEARANCE ENVELOPE OF THE HOSE UNIT ASSEMBLY AND SHOWS THE MIN CLEARANCE RECOMMENDED FOR SATISFACTORY OPERATIONS. IT INCLUDES AN ALLOWANCE FOR ARCTIC GLOVES.

(d) SURFACE ROUGHNESS IN ACCORDANCE WITH ANSI-B46.1

(e) REMOVE BURRS AND BREAK SHARP EDGES .016 MAXIMUM.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.005 ANGLES 0° 15'.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/3I, AND NATO STANAG 3603 ASP. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAN APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT.

APPROVED 28 Oct 68 REVISED (B) FOR CHANGES SEE SHEET 1

Review activities: Air Force - 99

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS PART NUMBER

| | | | |
|---|---|---|---|
| P.A. Air Force - II Other Cust Navy - AS | INTERNATIONAL INTEREST ASCC AIR STD 17/3I (STANAG 3603 ASP) | TITLE COUPLING, REPLENISHMENT, 1-1/2 INCH, FOR METHANOL-WATER, (DETAILS OF SERVICING NOZZLE) | MILITARY STANDARD MS33669 |
| PROCUREMENT SPECIFICATION NONE | | SUPERSEDES: | SHEET 2 OF |

Project No. 1680-0439

☆U.S. GOVERNMENT PRINTING OFFICE: 1977—703-020/5274

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.