
INCH-POUND
MS33695A
9 July 2004
SUPERSEDING
MS33695
17 December 1958

DETAIL SPECIFICATION SHEET

CONTACTS, VIDEO COAXIAL CONNECTOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

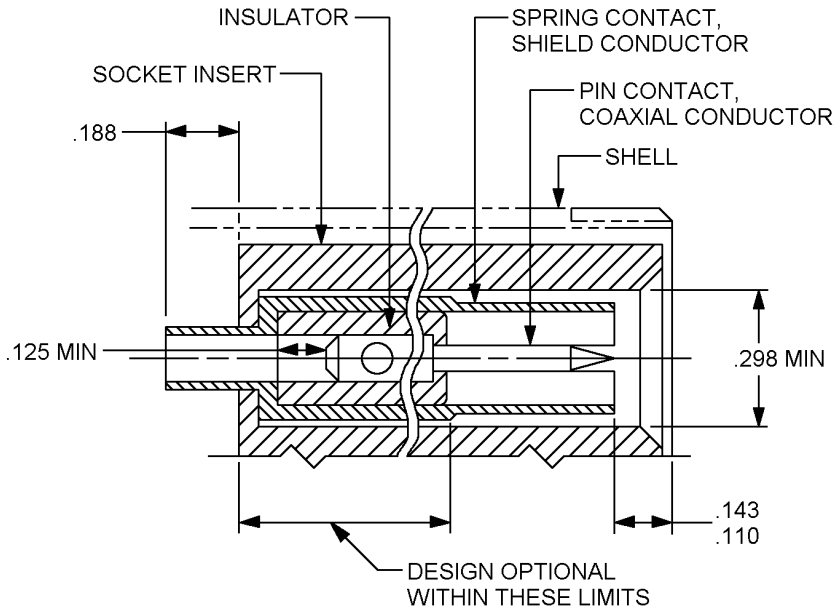

Inches	mm
.110	2.794
.125	3.175
.143	3.632
.188	4.775
.298	7.570


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance shall be ± .016 (.406 mm).

FIGURE 1. Pin contact assembly, coaxial connector.

AMSC N/A


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

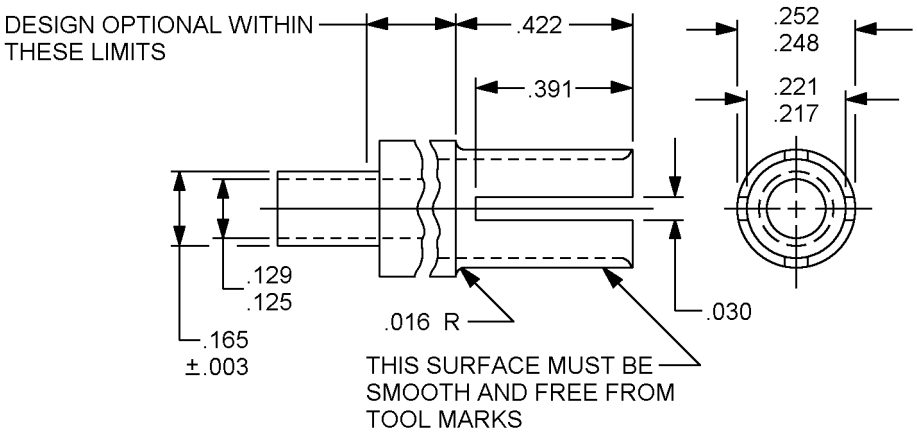

Inches	mm	Inches	mm
.003	.076	.217	5.512
.016	.406	.221	5.613
.030	.762	.248	6.300
.125	3.175	.252	6.401
.129	3.276	.391	9.931
.165	3.276	.422	10.720


FIGURE 2. Spring contact, shield conductor.

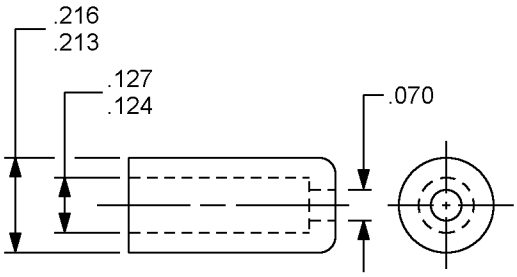

Inches	mm
.070	1.778
.124	3.149
.127	3.226
.213	5.410
.216	5.486

FIGURE 3. Insulator.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

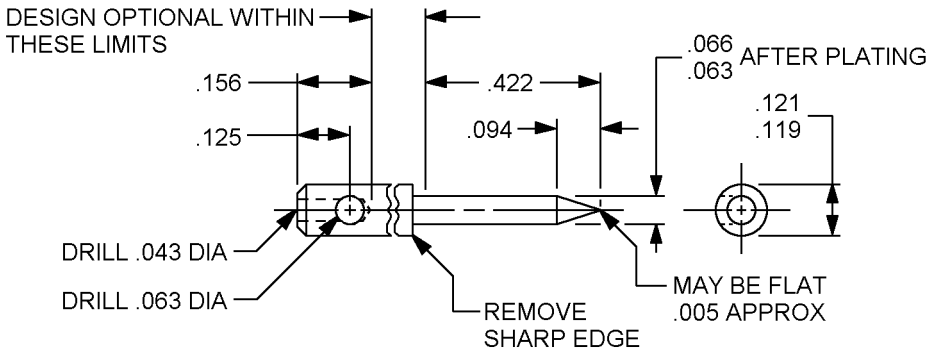

Inches	mm	Inches	mm
.005	.127	.121	3.073
.043	1.092	.125	3.175
.063	1.600	.156	3.962
.066	1.676	.422	10.718
.094	2.387		
.119	3.022		

FIGURE 4. Pin contact, coaxial conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

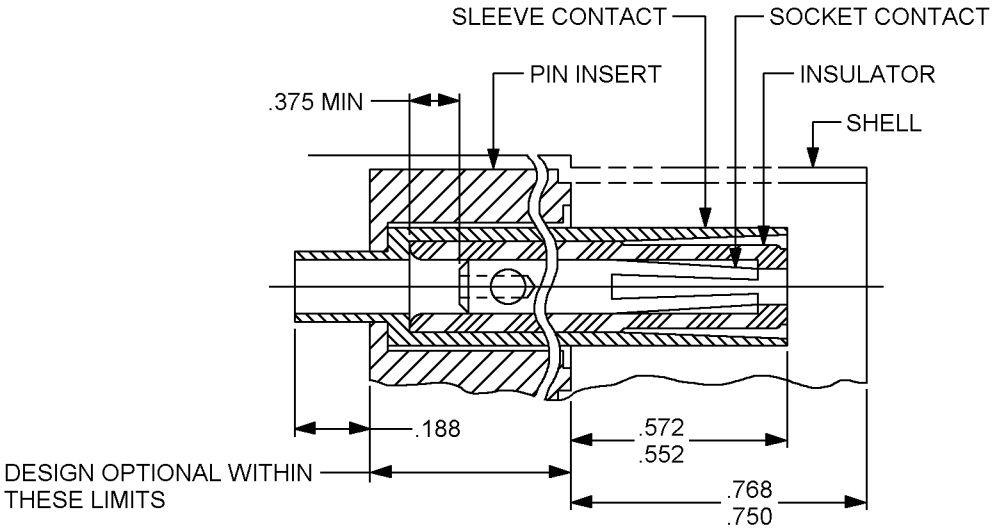


Inches	mm
.188	4.775
.375	14.300
.552	14.020
.572	14.528
.750	19.050
.768	19.507

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance shall be ±.016.

FIGURE 5. Socket contact assembly, coaxial connector.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

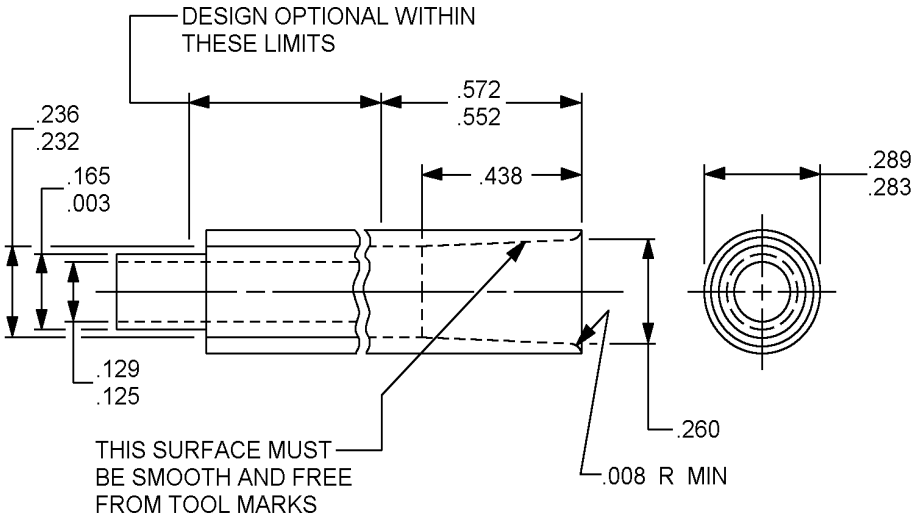

Inches	mm	Inches	mm
.003	.076	.260	6.604
.008	.203	.283	7.188
.125	3.175	.289	7.340
.129	3.276	.438	11.125
.165	4.191	.552	14.020
.232	5.893	.572	14.528
.236	5.994		


FIGURE 6. Socket, sleeve contact, shield conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

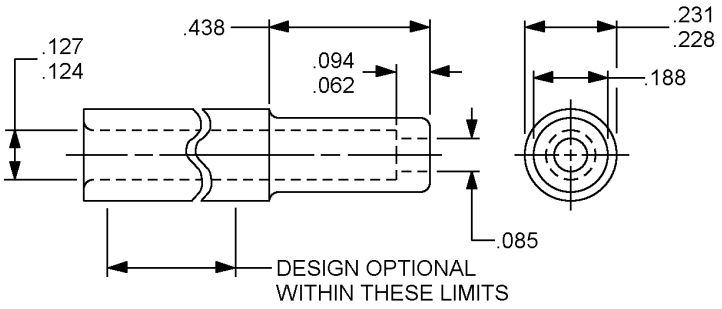

Inches	mm	Inches	mm
.062	1.575	.188	4.775
.085	2.159	.228	5.791
.094	2.387	.231	5.867
.124	3.149	.438	11.125
.127	3.226		

FIGURE 7. Socket, insulator.

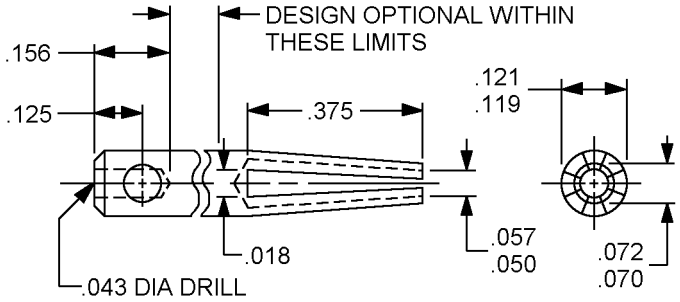

Inches	mm	Inches	mm
.018	.457	.119	3.022
.043	1.092	.121	3.073
.050	1.270	.125	3.175
.057	1.448	.156	3.962
.070	1.778	.375	9.525
.072	1.828		

FIGURE 8. Socket contact, coaxial conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

Requirements:

Design and construction: See figures 1 through 8.

Material:

a. Pin contact and sleeve contact: Brass, ½ hard, composition 22, in accordance with ASTM B121, ASTM B36, ASTM B16, ASTM B16M and ASTM B124.
b. Spring contact and socket contact: In accordance with ASTM B139.
c. Insulator: Styramic HT, G.E. 1421 copolymer or DOW Q-200.5 copolymer.

Finish: Metal parts, gold plate, .0002 inches (.0051 mm).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. This document references the following:

ASTM B16
ASTM B16M
ASTM B36
ASTM B121
ASTM B124
ASTM B139

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4419-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.