
Form Approved
OMB No. 0704-0188

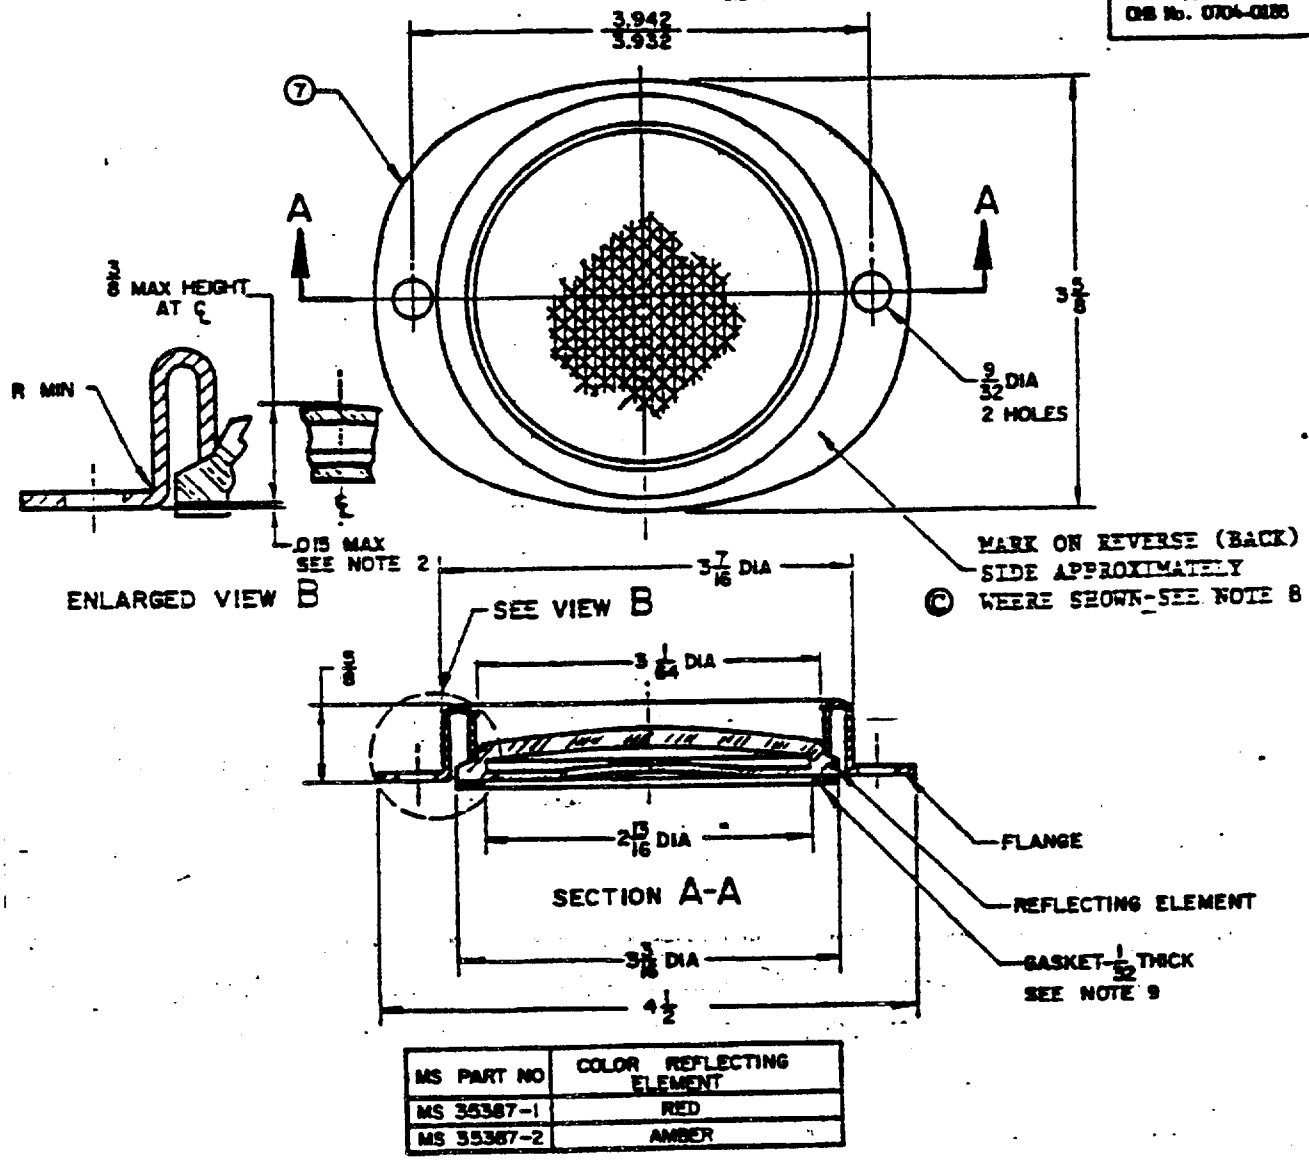

MS PART NO	COLOR REFLECTING ELEMENT
MS 35387-1	RED
MS 35387-2	AMBER

NOTES:

1. PERFORMANCE, FINISH, AND TESTS SHALL BE IAW PROCUREMENT SPECIFICATION.
2. BASE OF REFLECTING ELEMENT SHALL BE FLUSH TO .015 INSIDE FLANGE MOUNTING SURFACE.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES: ±1/64 ON FRACTIONS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION, OTHER THAN TO FEATURES SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
7. PERIMETER MUST BE ELLIPSOIDAL WITHIN DIMENSIONS GIVEN.
8. MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
9. RUBBER, GRADE SC 610, SPECIFICATION MIL-R-3065.

© DENOTES CHANGE FROM PREVIOUS ISSUE

PREPARING ACTIVITY: Army-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- DLA- REVIEW: GL USER: PROJECT NUMBER: 9905-0304	MILITARY SPECIFICATION SHEET TITLE: Reflector, Indicating Clearance	SPECIFICATION SHEET NUMBER: MS35387c 25 May 90 SUPERSEDING: MS35387b 20 Jun 61 AMSC-NA FSC-9905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 1 of 1

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-R-12144

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22
Check the source to verify that this is the current version before use.