FED SUP CLASS
5306

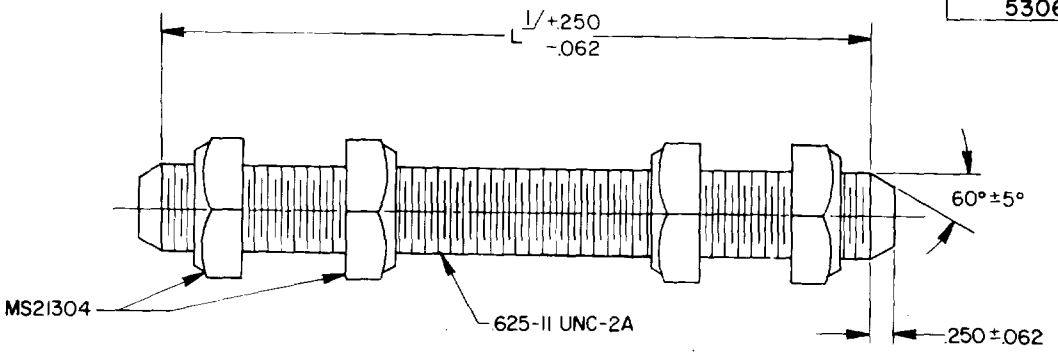


TABLE I DASH NUMBERS AND LENGTH

DASH NO	L 1/
-1	12
-2	14
-3	16
-4	18
-5	20
-6	22
-7	24

1/ LENGTH SHALL BE MEASURED OVER FULL THREADED PORTION OF ROD. CHAMFERED ENDS SHALL NOT BE INCLUDED IN ROD LENGTH.

REQUIREMENTS:

1. MATERIAL: RODS SHALL BE STEEL, GRADE 1020 OR 1025 IN ACCORDANCE WITH ASTM A576 (UNS G10200 OR UNS G10250).
2. TENSILE STRENGTH: MINIMUM TENSILE STRENGTH SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
3. PROTECTIVE COATING: RODS SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
4. THREADS: SHALL BE UNIFIED COARSE SERIES CLASS 2A IN ACCORDANCE WITH FED STD H28/2. PRIOR TO COATING, ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED. STD H28/20, SYSTEM 21. AFTER COATING, THE THREADS SHALL BE IN SUCH CONDITION THAT NUTS CAN RUN THE ENTIRE LENGTH OF THE THREAD WITHOUT THE USE OF TOOLS.
5. FINISH: IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
6. MARKING: RODS SHALL BE TAGGED WITH MS PART NUMBER AND MANUFACTURER'S SYMBOL OR OTHER MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.
7. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS35799-1
- DASH NUMBER
- BASIC MS SHEET NUMBER

MS35799-1 INDICATES: ROD, DOUBLEARMING, HOT GALVANIZED, POLE LINE, .625-11 UNC-2A, 12 INCHES LONG.

8. UNLESS OTHERWISE SPECIFIED EACH ROD SHALL BE FURNISHED WITH FOUR (4) NUTS ASSEMBLED THERE ON NUTS SHALL CONFORM TO MS21304.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

© ENTIRE STANDARD REVISED

APPROVED 19 NOV 56 REVISED © 20 OCT 87

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - ER Other Cust NAVY - YD AIR FORCE-99		ROD, CONTINUOUS THREAD, DOUBLE ARMING, HOT GALVANIZED, (POLE LINE)	MS35799
PROCUREMENT SPECIFICATION ANSI C135.1	SUPERSEDES:		PAGE 1 OF 1

DD FORM 672-1 (OVERPRINTED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5306-1130

AMSC N/A

REVIEWER ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES: USER ACTIVITIES:
ARMY - GL, ME
AIR FORCE - 82
DLA - IS
GSA - FSS
NASA - JFK
NSA - NS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.