
FED. SUP CLASS
4730

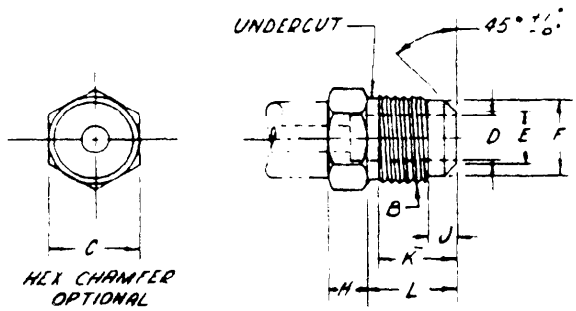

FLARE SIZE	THREAD B	PITCH DIA	HEX C MIN	D-DIA	DIA E	DIA F	LENGTH M	LENGTH L	J	MIN FULL THREAD K
1/8	7/16 - 20	.3995 - .4037	.4375	.188	.219	.344	.180	.500	.160	.410
3/8	5/8 - 18	.5828 - .5875	.625	.281	.312	.531	.240	.620	.220	.540
1/2	3/4 - 16	.7029 - .7079	.750	.406	.438	.641	.300	.750	.250	.660
5/8	7/8 - 14	.8216 - .8270	.875	.500	.531	.750	.370	.880	.280	.760
3/4	1 1/16 - 14	1.0092 - 1.0145	1.0625	.625	.719	.938	.430	1.000	.280	.900

NOTES.

1. THE FLARE SIZE CORRESPONDS TO THE NOMINAL OUTSIDE DIAMETER OF THE TUBING.
2. ALL DIMENSIONS IN INCHES.
3. FITTING SEATS SHALL BE CONCENTRIC WITH STRAIGHT THREAD PITCH DIAMETERS WITHIN 0.010 INCH FULL INDICATOR READING.
4. TOLERANCES ON DIMENSIONS NOT OTHERWISE LIMITED SHALL BE PLUS OR MINUS 0.010 INCH.
5. MINIMUM ACROSS CORNER DIMENSIONS OF HEXAGONS SHALL BE 1.092 TIMES THE NOMINAL WIDTH ACROSS FLATS OF THE HEXAGON.
6. THE DEPTH OF DIMENSION E SHALL NOT EXCEED DIMENSION L PLUS ONE HALF DIMENSION H.
7. © FITTING TO BE IN CONFORMANCE WITH SAEJ513E AND ANSI B70.1 (1969).
8. UNDERCUT OPTIONAL ON 1/2, 5/8 and 3/4 FLARE SIZES ONLY. WHEN UNDERCUT, DIMENSION K MAY BE SHORTENED BY 1/2 PITCH.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

APPROVED 9 JAN 58 REVISED (4) 24 SEPT 1962 (5) 6 MAY 1970 © 4 DEC 1975

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

P.A. ARMY GL Other Cust NAVY YD USAF 82	TITLE CONNECTION END, EXTERNAL FLARE, REFRIGERATION	MILITARY STANDARD MS 35873
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

REVIEW ACTIVITIES
ARMY MI
NAVY AS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

NOTICE OF
VALIDATION

MS 35873C
NOTICE 1
31 October 1986

MILITARY STANDARD

CONNECTION END, EXTERNAL FLARE, REGRIGERATION

Military standard MS 35873C dated 4 December 1975 has been reviewed and determined to be current.

Preparing Activity:
Army - GL

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MI
DLA - CS

FSC 4730

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.