
FED SUP CLASS 4130

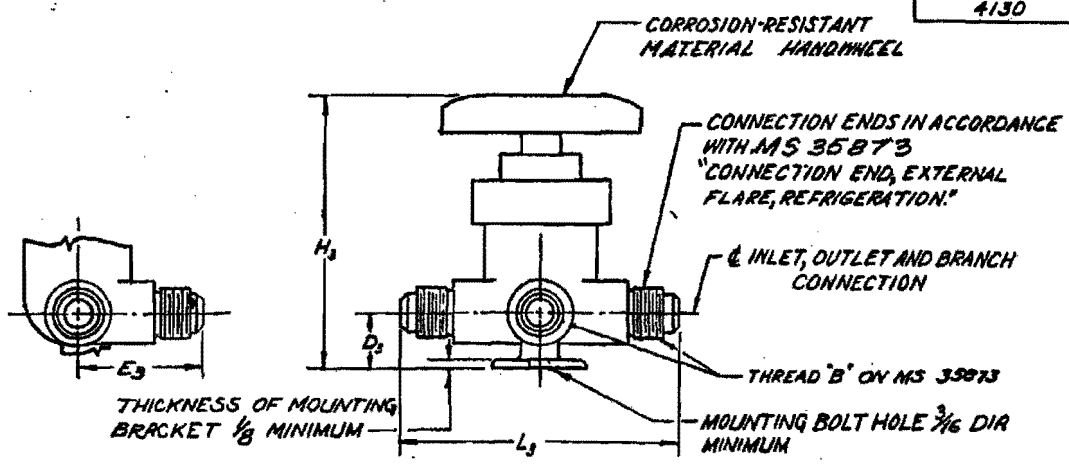

DASH NO 1/	TUBE O.D. SIZE	L_3 MIN	L_3 MAX	H_3 FULL OPEN MAX	D_3 MIN	E_3 MIN	E_3 MAX
-1-U	1/4	2 3/4	3 1/4	3 3/4	9/16	1 1/4	1 3/4
-2-U	3/8	2 3/4	3 1/4	3 3/4	9/16	1 1/4	1 3/4
-3-U	1/2	3	3 3/4	3 7/8	5/8	1 5/8	2 1/4
-4-U	5/8	3 3/8	3 7/8	4 1/4	3/4	1 7/8	2 3/8

1/ MS DASH NUMBERS WITHOUT LETTER DESIGNATES VALVE BACKSEATING ABOVE DIAPHRAGM ONLY

MS DASH NUMBERS WITH LETTER "U" DESIGNATES VALVE BACKSEATING ABOVE AND BELOW DIAPHRAGM

NOTES

1. VALVE BODY:
   A. MATERIAL: FORGED COPPER, ALLOY 377 OF QQ-B-626.
   B. FINISH: MANUFACTURERS STANDARD COMMERCIAL
2. OPERATING REQUIREMENTS:
   A. MAXIMUM OPERATING PRESSURE: 300 P.S.I.G.
   B. MAXIMUM OPERATING TEMPERATURE: 200 F.
   WHEN VALVE IS SUBJECTED TO MAXIMUM OPERATING REQUIREMENTS THERE SHALL BE NO LEAKAGE BY SEAT OR TO THE OUTSIDE AND THE VALVE SHALL OPEN READILY WITH MAXIMUM OPERATING PRESSURE ABOVE SEATING DISK.
3. SEATING DISK AND DIAPHRAGM.
   MATERIAL: RESILIENT, CORROSION-RESISTANT, LONG WEARING METAL OR COMPOSITION MATERIAL IMPERVIOUS TO ALL REFRIGERANTS OF THE CHLORO-METHANE FAMILY.
4. ALL SIZES SHOWN ARE OUTSIDE TUBE DIAMETER SIZES.
5. ALL DIMENSIONS GIVEN IN INCHES
6. VALVE SHALL HAVE THE DIRECTION OF FLOW INDICATED ON BODY, UNLESS VALVE IS NON-DIRECTIONAL.
7. MOUNTING BOLT SPACING IS SUBJECT TO INDUSTRY PRACTICE.
8. VALVE SHALL HAVE AN UNRESTRICTED FLOW AREA AT LEAST EQUIVALENT TO THE AREA OF A CIRCLE HAVING A DIAMETER EQUAL TO THE INSIDE DIAMETER OF THE TUBING.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
11. PART NUMBER. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35883-1

APPROVED 16 DECEMBER '57 REVISED (A) 29 JULY '66 (B) 19 NOV 1971 (C) 16 MAR 1978

This Military Standard has been approved by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review activity: User activities:
DLA - GS Army - MI
Navy - MC

CUSTODIANS
ARMY-GL
NAVY-SH
USAF-99

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

MILITARY STANDARD
VALVES, PACKLESS, STOP, THREE-WAY FLARE CONNECTION ENDS

MS 35883

SHEET 1 OF 1

DD FORM 1 OCT 83 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.