
MS9297 (ASG)

FED. SUP CLASS 5306

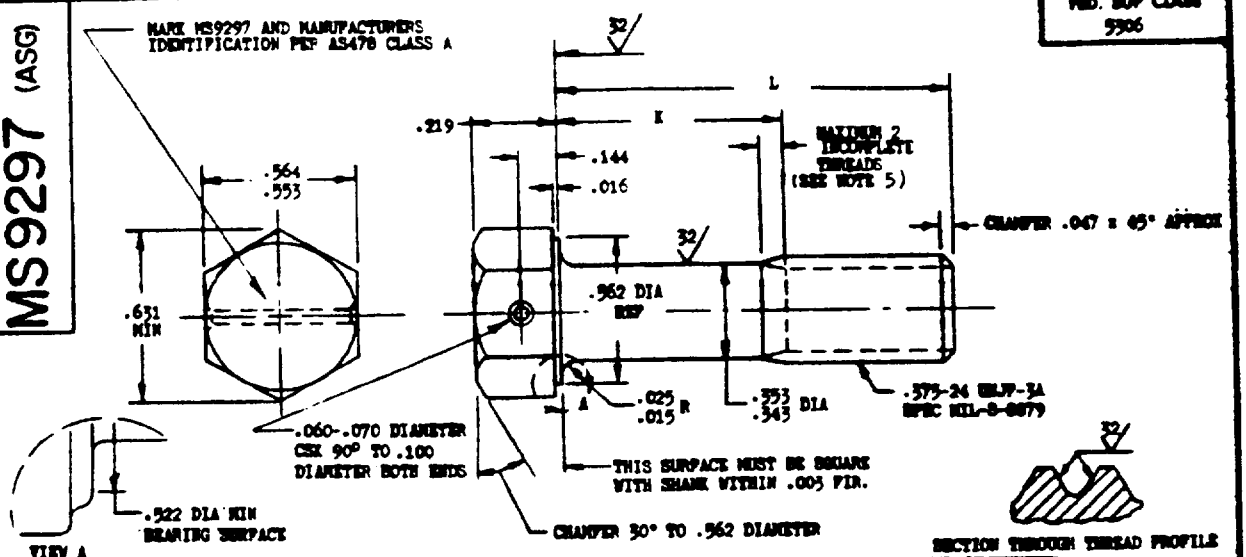

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9297-04	.625	.088-.108	3.33
MS9297-05	.688	.088-.108	3.50
MS9297-06	.750	.088-.108	3.67
MS9297-07	.812	.088-.108	3.84
MS9297-08	.875	.088-.108	4.01
MS9297-09	.938	.088-.108	4.18
MS9297-10	1.000	.088-.108	4.35
MS9297-11	1.062	.088-.108	4.51
MS9297-12	1.125	.088-.125	4.68
MS9297-13	1.188	.128-.188	4.85
MS9297-14	1.250	.190-.250	5.02
MS9297-15	1.312	.252-.312	5.19
MS9297-16	1.375	.315-.375	5.35
MS9297-17	1.438	.378-.438	5.52
MS9297-18	1.500	.440-.500	5.69
MS9297-19	1.562	.502-.562	5.86
MS9297-20	1.625	.565-.625	6.03
MS9297-21	1.688	.628-.688	6.19
MS9297-22	1.750	.690-.750	6.36
MS9297-23	1.875	.815-.875	6.70
MS9297-24	2.000	.940-1.000	7.03
MS9297-25	2.125	1.065-1.125	7.37
MS9297-26	2.250	1.190-1.250	7.71
MS9297-27	2.375	1.315-1.375	8.04
MS9297-28	2.500	1.440-1.500	8.38
MS9297-29	2.625	1.565-1.625	8.71
MS9297-30	2.750	1.690-1.750	9.05

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9297-31	2.875	1.815-1.875	9.39
MS9297-32	3.000	1.940-2.000	9.72
MS9297-33	3.125	2.065-2.125	10.06
MS9297-34	3.250	2.190-2.250	10.39
MS9297-35	3.375	2.315-2.375	10.73
MS9297-36	3.500	2.440-2.500	11.07
MS9297-37	3.625	2.565-2.625	11.40
MS9297-38	3.750	2.690-2.750	11.74
MS9297-39	3.875	2.815-2.875	12.07
MS9297-40	4.000	2.940-3.000	12.41
MS9297-41	4.125	3.065-3.125	12.75
MS9297-42	4.250	3.190-3.250	13.08
MS9297-43	4.375	3.315-3.375	13.42
MS9297-44	4.500	3.440-3.500	13.75
MS9297-45	4.625	3.565-3.625	14.09
MS9297-46	4.750	3.690-3.750	14.43
MS9297-47	4.875	3.815-3.875	14.76
MS9297-48	5.000	3.940-4.000	15.10
MS9297-49	5.125	4.065-4.125	15.43
MS9297-50	5.250	4.190-4.250	15.77
MS9297-51	5.375	4.315-4.375	16.11
MS9297-52	5.500	4.440-4.500	16.44
MS9297-53	5.625	4.565-4.625	16.78
MS9297-54	5.750	4.690-4.750	17.11
MS9297-55	5.875	4.815-4.875	17.45
MS9297-56	6.000	4.940-5.000	17.79

1. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
2. SHANK SHALL BE STRAIGHT WITHIN .0025 PER INCH OF BOLT LENGTH.
3. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
4. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR.
5. INCOMPLETE THREADS NOT TO ENTER FILLET.
6. MATERIAL: STEEL AMS 6322.
7. HARDNESS: ROCKWELL C26-32.
8. FINISH: BLACK OXIDE TREATMENT AMS 2485.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
12. BREAK SHARP EDGES .008-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±1°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS # AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

REVISED 15 Sep 65 AMSC N/A

P.A. USAF - 11 Other Cust Navy - WF	TITLE BOLT, MACHINE-STEEL AMS 6322, BLACK OXIDE, DRILLED, 1 HOLE, HEXAGON HEAD, .375-24 UNJF-3A	MILITARY STANDARD MS9297 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Navy - WF

Not activity. All other military activities are required to comply this standard unless unlisted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.