
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

The standard has been approved by the Bureau (Department of the Navy) and the USAF and is mandatory for use by their activity. All other military activities are requested to employ the standard where suitable.

MS9402 (ASG)

FED SUP CLASS 5306

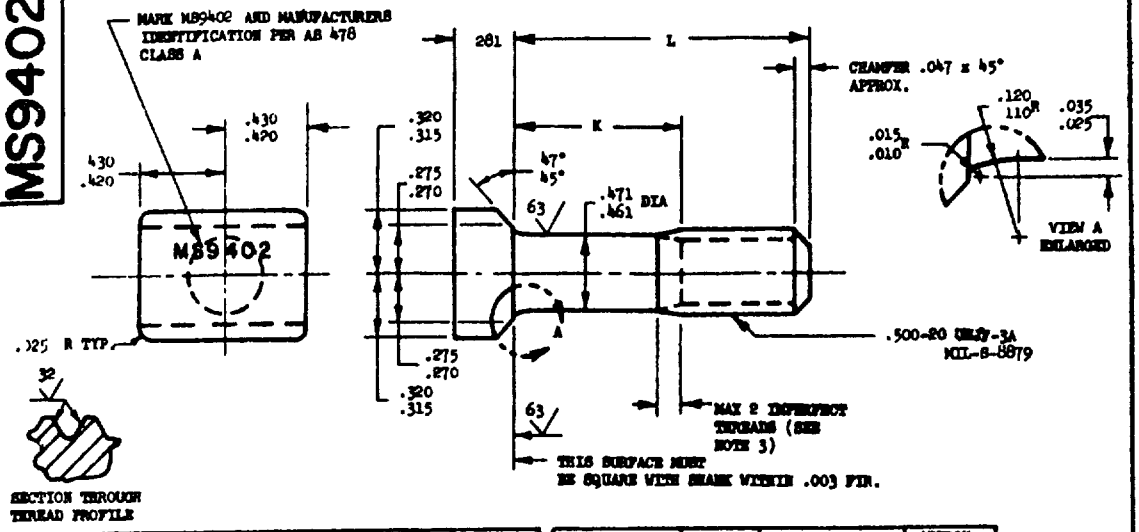

PART NUMBER	L	K	APPROX. WEIGHT LB/100
MS9402-05	.875	.155- .175	8.41
MS9402-06	.938	.155- .175	8.71
MS9402-07	1.000	.155- .175	9.01
MS9402-08	1.062	.155- .175	9.32
MS9402-09	1.125	.155- .175	9.62
MS9402-10	1 188	.155- .175	9.92
MS9402-11	1.250	.155- .175	10.22
MS9402-12	1.312	.155- .175	10.53
MS9402-13	1.375	.155- .175	10.83
MS9402-14	1.438	.155- .175	11.13
MS9402-15	1.500	.190- .250	11.43
MS9402-16	1.562	.252- .312	11.73
MS9402-17	1.625	.315- .375	12.04
MS9402-18	1.688	.378- .438	12.34
MS9402-19	1.750	.440- .500	12.64
MS9402-20	1.875	.565- .625	13.24
MS9402-21	2.000	.690- .750	13.85
MS9402-22	2.125	.815- .875	14.45
MS9402-23	2.250	.940-1.000	15.06
MS9402-24	2.375	1.065-1.125	15.66
MS9402-25	2.500	1.190-1.250	16.27
MS9402-26	2.625	1 315-1.375	16.87
MS9402-27	2.750	1.440-1.500	17.47
MS9402-28	2.875	1 565-1.625	18.08
MS9402-29	3.000	1.690-1.750	18.68
MS9402-30	3.125	1.815-1.875	19.29

PART NUMBER	L	K	APPROX. WEIGHT LB/100
MS9402-31	3.250	1.940-2.000	19.89
MS9402-32	3 375	2.065-2.125	20.50
MS9402-33	3.500	2.190-2.250	21.10
MS9402-34	3.625	2.315-2.375	21.70
MS9402-35	3.750	2.440-2.500	22.31
MS9402-36	3.875	2.565-2.625	22.91
MS9402-37	4.000	2.690-2.750	23.52
MS9402-38	4.125	2.815-2.875	24.12
MS9402-39	4.250	2.940-3.000	24.72
MS9402-40	4.375	3.065-3.125	25.33
MS9402-41	4.500	3.190-3.250	25.93
MS9402-42	4.625	3.315-3.375	26.54
MS9402-43	4 750	3.440-3.500	27.14
MS9402-44	4.875	3.565-3.625	27.75
MS9402-45	5.000	3.690-3.750	28.35
MS9402-46	5 125	3.815-3.875	28.95
MS9402-47	5.250	3.940-4.000	29.56
MS9402-48	5.375	4 065-4.125	30.16
MS9402-49	5 500	4.190-4 250	30 77
MS9402-50	5.625	4.315-4.375	31 37
MS9402-51	5.750	4.440-4 500	31.98
MS9402-52	4.875	4.565-4.625	32.98
MS9402-53	6.000	4.690-4.750	33.18

1 SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH.
2 THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3 INCOMPLETE THREADS NOT TO ENTER THE FILLET AREA.
4 HEAD TO SHANK FILLET SHALL BE COLD ROLLED
5 MATERIAL STEEL AMS 6322 HARDNESS ROCKWELL C26-32
6 FINISH CADMIUM PLATE AMS 2400 DIMENSIONS SPECIFIED ARE AFTER PLATING.
7 SURFACT ROUGHNESS AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
8 MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD MUST BE UPSET.
9. PART SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640.
10 BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
11 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES. LINEAR DIMENSIONS ±.010,
12. DO NOT USE UNASSIGNED PART NUMBERS.
AS AND AMS ARE SAE PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 9 May 62 REVISED

P A USAF - AFSC Other Cust Navy - We	TITLE BOLT, TEE HEAD - AMS 6322, CHAMFERED, .500-20 UNJF-3A, CADMIUM PLATE	MILITARY STANDARD MS9402 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

☆U S GOVERNMENT PRINTING OFFICE 1981 — 703-023/7850

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.