
MS9404

FED SUP CLASS 5365 (A)

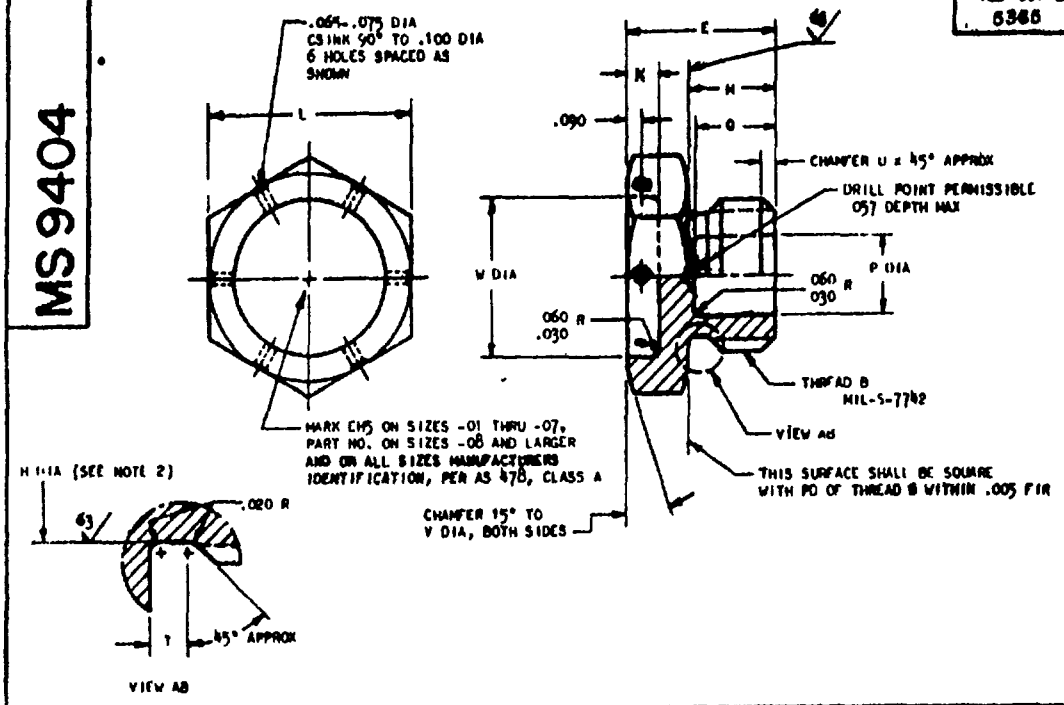

PART NO	THREAD B	E	H +.002 -.003	J (1)	K	L	M	P	Q	T +.015 -.000	U	V	W	APPROX WEIGHT LB/100
MS9404-01	250-28 UNF-3A	560	196	.013	150	430-.439	320	—	—	063	020-.050	438	250	1.05
MS9404-02	3125-24 UNF-3A	600	.250	.017	150	553-.564	.360	—	—	063	.020-.050	562	.312	1.84
MS9404-03	375-24 UNF-3A	600	312	019	150	616-.627	.360	—	—	063	.020-.050	.625	375	2.35
MS9404-04	4375-20 UNF-3A	660	.364	.021	150	679-.690	.400	—	—	075	030-.060	688	438	3 28
MS9404-05	500-20 UNF-3A	.670	.426	023	150	741-.752	400	219	.380	075	030-.060	.750	.500	3 51
MS9404-06	5625-18 UNF-3A	680	.481	.024	150	802-.814	.400	.219	340	083	040-.070	.812	.562	5 02
MS9404-07	625-18 UNF-3A	730	544	.026	.160	865-.877	440	312	380	083	040-.070	.875	625	5.63
MS9404-08	750-16 UNF-3A	730	660	.030	.160	990-1.002	.440	438	400	094	.040-.070	1.000	.750	7 60
MS9404-09	8125-16 UN-3A	740	722	.030	.160	1.052-1.064	.440	.500	400	094	040-.070	1.062	812	8 46
MS9404-10	875-14 UNF-3A	740	.773	030	160	1.114-1.127	440	568	400	107	050-.080	1.125	.875	10.24
MS9404-11	1.000-12 UNF-3A	780	882	.030	180	1.301-1.314	440	.657	400	125	050-.080	1.312	1.000	13 36
MS9404-12	1.0625-12 UN-3A	830	945	.030	.200	1.364-1.377	.480	.719	400	.125	050-.080	1.375	1.062	15.12
MS9404-13	1.125-12 UNF-3A	830	1.008	030	200	1.427-1.440	.480	781	400	125	050-.080	1.438	1.125	16 12
MS9404-14	1.1875-12 UN-3A	830	1.070	.030	200	1.489-1.502	480	844	400	125	.050-.080	1.500	1.188	17.18
MS9404-16	1.3125-12 UN-3A	840	1.195	030	200	1.614-1.627	.480	969	400	125	050-.080	1.625	1.312	19.86
MS9404-18	1.500-12 UNF-3A	840	1.382	030	200	1.738-1.752	480	1.156	400	125	050-.080	1.750	1.438	22.50
MS9404-20	1.625-12 UN-3A	850	1.507	.050	200	1.926-1.940	480	1.281	400	125	.050-.080	1.938	1.625	26.64
MS9404-24	1.875-12 UN-3A	860	1.756	050	200	2.176-2.190	480	1.531	400	125	.050-.080	2.188	1.875	32.70
MS9404-28	2.250-12 UN-3A	870	2.131	.050	.200	2.550-2.564	480	1.906	400	125	050-.080	2.562	2.250	43 43
MS9404-32	2.500-12 UN-3A	870	2.381	050	.200	2.800-2.814	480	2.156	400	125	050-.080	2.812	2.500	51.70

1. HEXAGON SHALL BE CONCENTRIC WITH THREAD PD WITHIN J FIR
2. DIAMETER H SHALL BE CONCENTRIC WITH THREAD PD WITHIN .005 FIR AND FREE FROM THREAD TOOL MARKS
3. MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 5646
4. MATERIAL CODE CHS PER AS 269.
5. SURFACE ROUGHNESS AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
6. PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
7. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
8. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°
9. DO NOT USE UNASSIGNED PART NUMBERS

(A) INACTIVE FOR DESIGN AFTER 9 JUNE 1972. FOR PARTS WITH MIL-S-8879 SCREW THREADS SEE MS9902

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS PUBLICATION
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 5 Jan 72 — REVISED (A) 9 June 72

P.A. Air Force - 82
Other Govt Navy - AS
INTERNATIONAL INTERES
ASCC AIR STD 17/15 (A)

TITLE: PLUG, MACHINE THREAD - AMS 5646, PREFORMED PACKING

MILITARY STANDARD
MS9404
SHEET 1 OF 1

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

DD FORM 1 SEP 65 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED

This standard has been approved by the Department of the Air Force (82) and the Department of the Navy (AS) and is mandatory for use by that activity. All other military activities are required to employ this standard when so...

Review Activities
Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.