MS9491

FED SUP CLASS
5306

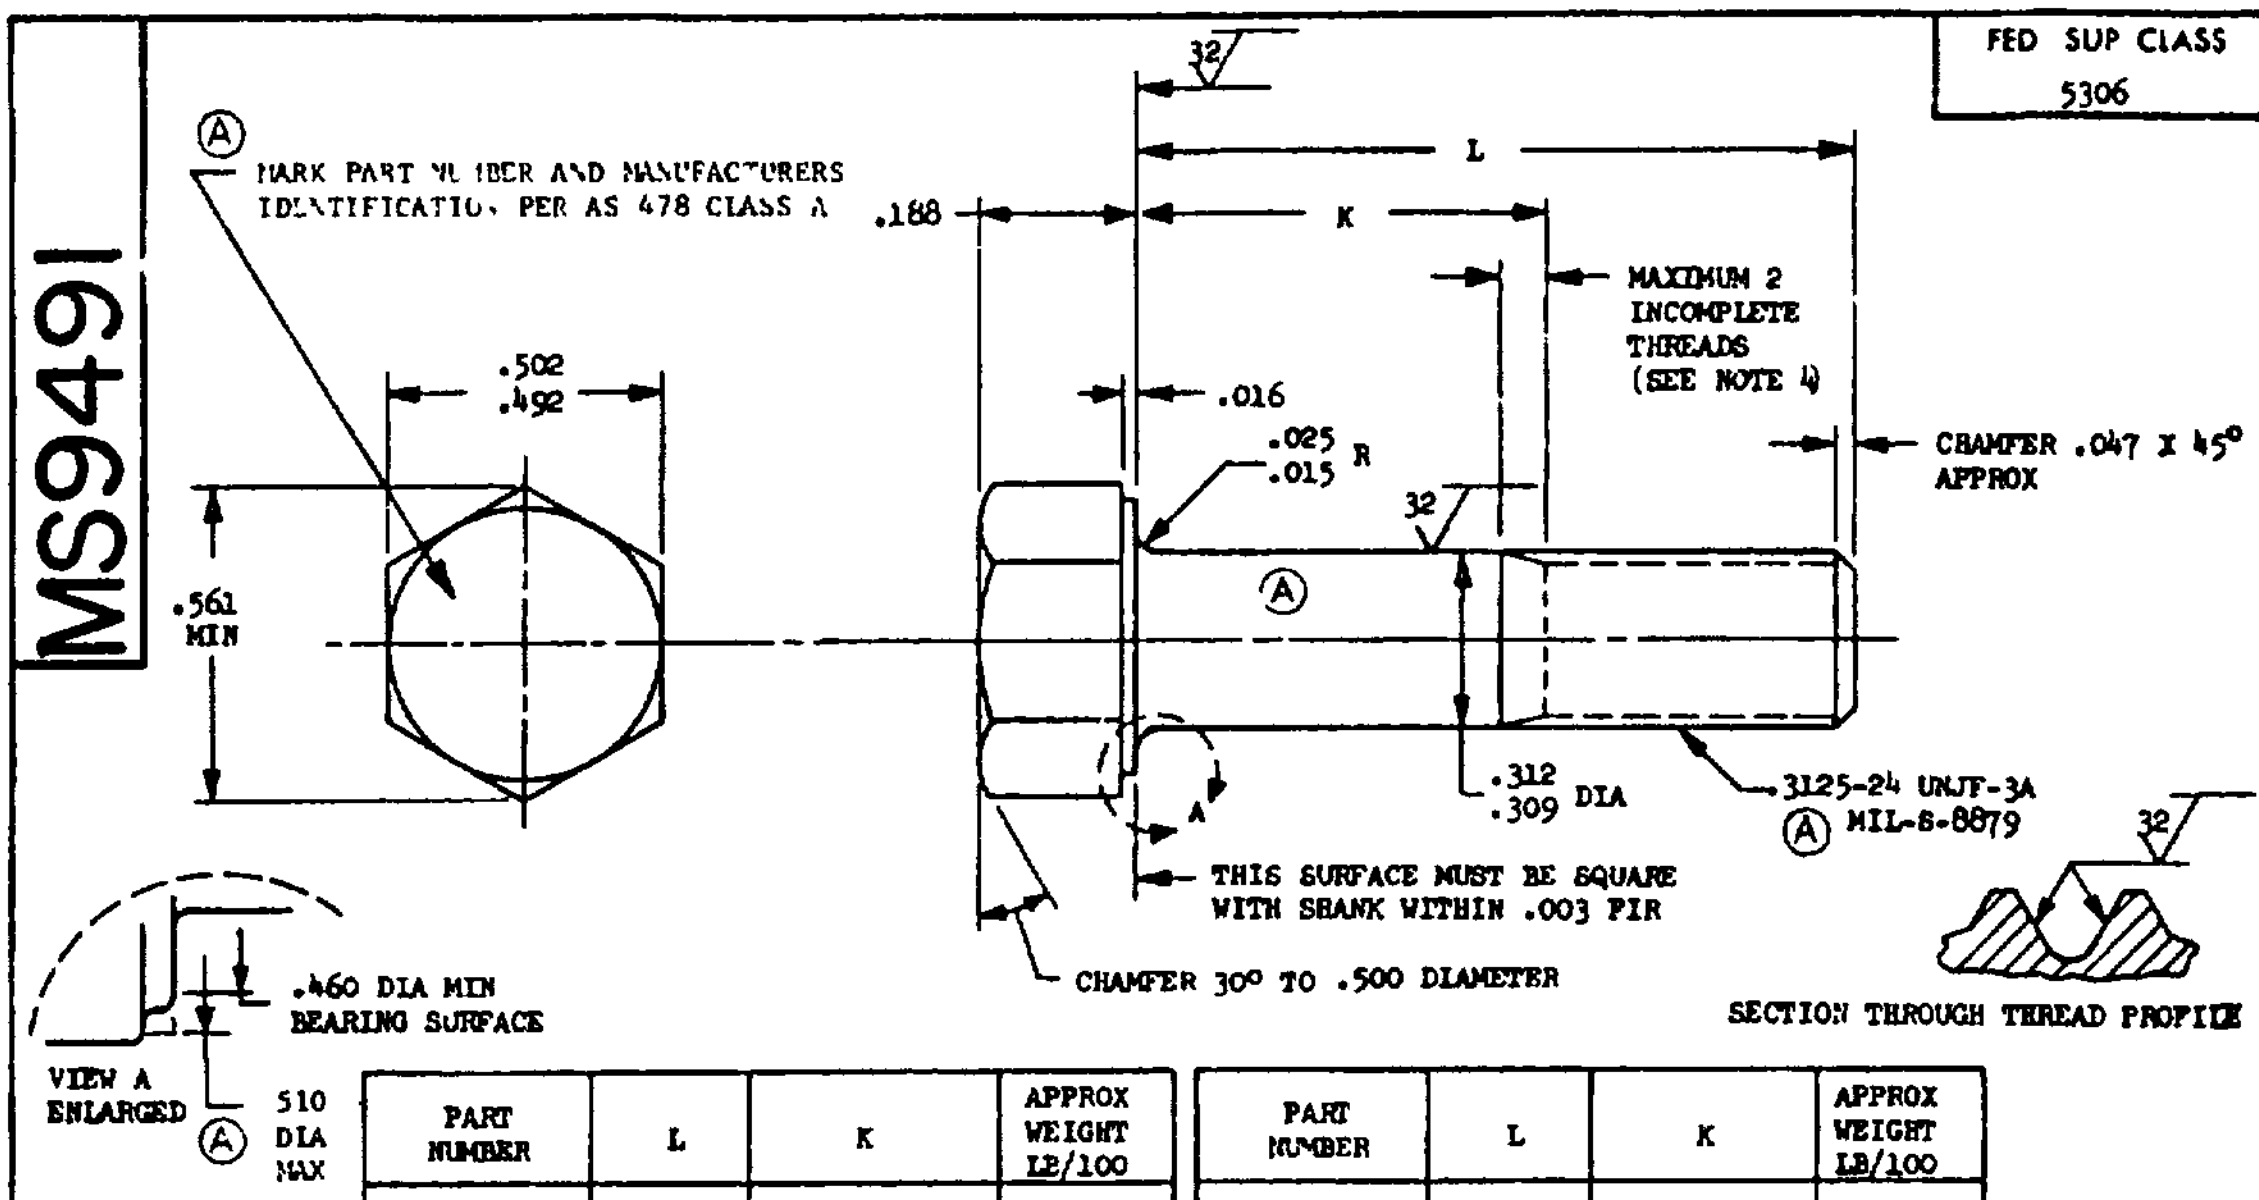
Ⓐ MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION PER AS 478 CLASS A
.502
.492
.561 MIN
32
L
.188
K
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
.016
.025
.015 R
CHAMFER .047 X 45° APPROX
32
Ⓐ
.312
.309 DIA
.3125-24 UNJF-3A
Ⓐ MIL-S-8879
A
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR
CHAMFER 30° TO .500 DIAMETER
32
SECTION THROUGH THREAD PROFILE
.460 DIA MIN BEARING SURFACE
VIEW A ENLARGED
.510 DIA MAX
Ⓐ

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9491-04	.500	.088-.108	2.18
MS9491-05	.562	.088-.108	2.32
MS9491-06	.625	.088-.108	2.45
MS9491-07	.688	.088-.108	2.59
MS9491-08	.750	.088-.108	2.73
MS9491-09	.812	.088-.108	2.86
MS9491-10	.875	.088-.108	3.00
MS9491-11	.938	.088-.108	3.13
MS9491-12	1.000	.088-.125	3.27
MS9491-13	1.062	.128-.188	3.40
MS9491-14	1.125	.190-.250	3.54
MS9491-15	1.188	.252-.312	3.67
MS9491-16	1.250	.315-.375	3.81
MS9491-17	1.312	.378-.438	3.94
MS9491-18	1.375	.440-.500	4.08
MS9491-19	1.438	.502-.562	4.21
MS9491-20	1.500	.565-.625	4.35
MS9491-21	1.562	.628-.688	4.48
MS9491-22	1.625	.690-.750	4.62
MS9491-23	1.688	.752-.812	4.76
MS9491-24	1.750	.815-.875	4.89
MS9491-25	1.875	.940-1.000	5.16
MS9491-26	2.000	1.065-1.125	5.43
MS9491-27	2.125	1.190-1.250	5.70
MS9491-28	2.250	1.315-1.375	5.97
MS9491-29	2.375	1.440-1.500	6.24
MS9491-30	2.500	1.565-1.625	6.51
MS9491-31	2.625	1.690-1.750	6.78
MS9491-32	2.750	1.815-1.875	7.06
MS9491-33	2.875	1.940-2.000	7.33
MS9491-34	3.000	2.065-2.125	7.60
MS9491-35	3.125	2.190-2.250	7.87
MS9491-36	3.250	2.315-2.375	8.14
MS9491-37	3.375	2.440-2.500	8.41
MS9491-38	3.500	2.565-2.625	8.68
MS9491-39	3.625	2.690-2.750	8.95
MS9491-40	3.750	2.815-2.875	9.22
MS9491-41	3.875	2.940-3.000	9.49
MS9491-42	4.000	3.065-3.125	9.76
MS9491-43	4.125	3.190-3.250	10.03
MS9491-44	4.250	3.315-3.375	10.30
MS9491-45	4.375	3.440-3.500	10.57
MS9491-46	4.500	3.565-3.625	10.84
MS9491-47	4.625	3.690-3.750	11.11
MS9491-48	4.750	3.815-3.875	11.39
MS9491-49	4.875	3.940-4.000	11.66
MS9491-50	5.000	4.065-4.125	11.93
MS9491-51	5.125	4.190-4.250	12.20
MS9491-52	5.250	4.315-4.375	12.47
MS9491-53	5.375	4.440-4.500	12.74
MS9491-54	5.500	4.565-4.625	13.01
MS9491-55	5.625	4.690-4.750	13.28
MS9491-56	5.750	4.815-4.875	13.55
MS9491-57	5.875	4.940-5.000	13.82
MS9491-58	6.000	5.065-5.125	14.09
MS9491-59	1.812	.878-.938	5.03 Ⓐ
MS9491-60	1.938	1.002-1.062	5.30 Ⓐ

Ⓐ 1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .015 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 5731
6. MANUFACTURING SPECIFICATION AMS 7477.
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
Ⓐ 8. SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
Ⓐ THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 5 May 1965
REVISED Ⓐ 17 Nov 69

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Army - AV, MI
USAF - 82, 85

P.A. USAF - 11 Other Cust Army - AV Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE Ⓐ BOLT, MACHINE - HEXAGON HEAD FULL SHANK, AMS 5731, 3125-24 UNJF-3A	MILITARY STANDARD MS9491
PROCUREMENT SPECIFICATION NONE		SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U S. GOVERNMENT PRINTING OFFICE 1970-393-093/S-3731

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.