MS9680 (ASG)

FED. SUP CLASS
5306

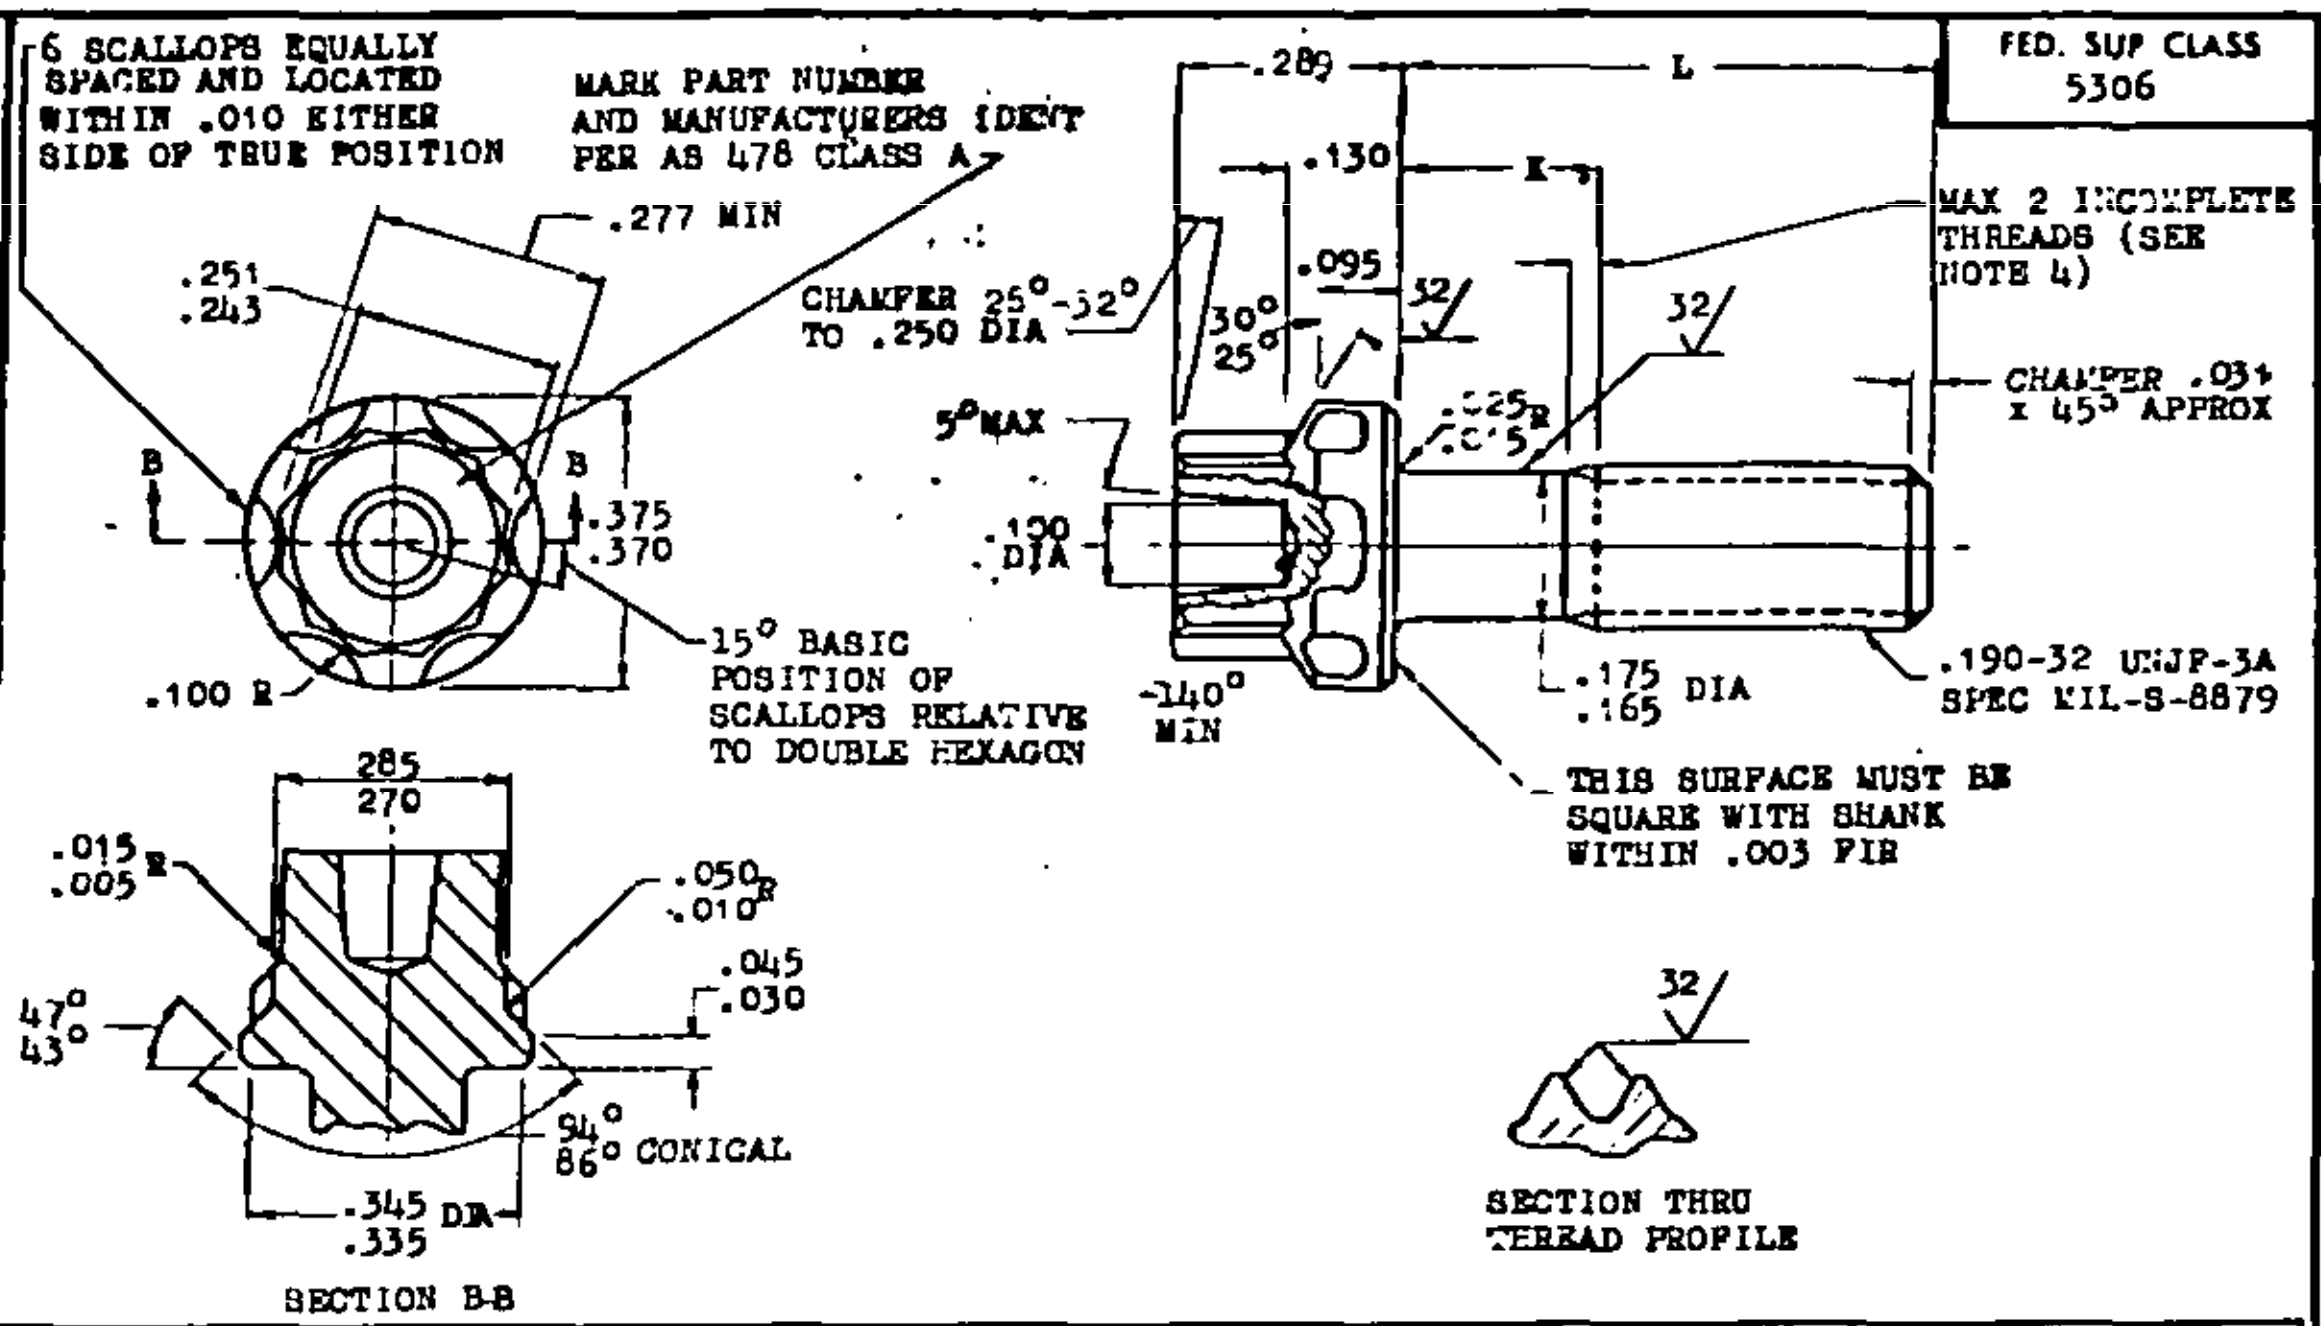

6 SCALLOPS EQUALLY SPACED AND LOCATED WITHIN .010 EITHER SIDE OF TRUE POSITION
MARK PART NUMBER AND MANUFACTURERS IDENT PER AS 478 CLASS A
.277 MIN
.251
.243
B
B
.375
.370
.100 R
15° BASIC POSITION OF SCALLOPS RELATIVE TO DOUBLE HEXAGON
CHAMFER 25°-32° TO .250 DIA
5° MAX
.190 DIA
.289
L
.130
K
.095
30°
25°
32
.025 R
.015
-140° MIN
.175
.165 DIA
MAX 2 INCOMPLETE THREADS (SEE NOTE 4)
CHAMFER .031 x 45° APPROX
.190-32 UNJF-3A SPEC MIL-S-8879
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR
.285
.270
.015
.005 R
.050
.010 R
.045
.030
47°
43°
94°
86° CONICAL
.345
.335 DIA
SECTION B-B
SECTION THRU THREAD PROFILE

PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100
				MS9680-22	1.500	.810- .870	1.67	MS9680-43	3.875	3.185-3.245	3.19
				MS9680-23	1.562	.872- .932	1.71				
MS9680-03	.312	.072-.092	.89	MS9680-24	1.625	.935- .995	1.75				
MS9680-04	.375	.072-.092	.95	MS9680-25	1.688	.998-1.058	1.79				
MS9680-05	.438	.072-.092	.99	MS9680-26	1.750	1.060-1.120	1.83				
MS9680-06	.500	.072-.092	1.03	MS9680-27	1.875	1.185-1.245	1.91				
MS9680-07	.562	.072-.092	1.07	MS9680-28	2.000	1.310-1.370	1.99				
MS9680-08	.625	.072-.092	1.11	MS9680-29	2.125	1.435-1.495	2.07				
MS9680-09	.688	.072-.092	1.15	MS9680-30	2.250	1.560-1.620	2.15				
MS9680-10	.750	.072-.120	1.19	MS9680-31	2.375	1.685-1.745	2.23				
MS9680-11	.812	.122-.182	1.23	MS9680-32	2.500	1.810-1.870	2.31				
MS9680-12	.875	.185-.245	1.27	MS9680-33	2.625	1.935-1.995	2.39				
MS9680-13	.938	.248-.308	1.31	MS9680-34	2.750	2.060-2.120	2.47				
MS9680-14	1.000	.310-.370	1.35	MS9680-35	2.575	2.185-2.245	2.55				
MS9680-15	1.062	.372-.432	1.39	MS9680-36	3.000	2.310-2.370	2.63				
MS9680-16	1.125	.435-.495	1.43	MS9680-37	3.125	2.435-2.495	2.71				
MS9680-17	1.188	.498-.558	1.47	MS9680-38	3.250	2.560-2.620	2.79				
MS9680-18	1.250	.560-.620	1.51	MS9680-39	3.375	2.685-2.745	2.87				
MS9680-19	1.312	.622-.682	1.55	MS9680-40	3.500	2.810-2.870	2.95				
MS9680-20	1.375	.685-.745	1.59	MS9680-41	3.625	2.935-2.995	3.03				
MS9680-21	1.438	.748-.808	1.63	MS9680-42	3.750	3.060-3.120	3.11				

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .006 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
11. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
14. DO NOT USE UNASSIGNED PART NUMBERS. Ⓑ REINSTATED AFTER 27 JUN 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

Review activities:
AIR FORCE—82
DLA—IS
Ⓑ

This standard has been approved by the Department of the Air Force and the Department of the [illegible] and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AS Other Cust Ⓑ 99	TITLE BOLT, MACHINE - STEEL AMS 6322, CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, CUPWASHER LOCKED, .190-32 UNJF-3A	MILITARY STANDARD MS9680 (ASG)
PROCUREMENT SPECIFICATION:	SUPERSEDES:	PAGE 1 OF 1

APPROVED 18 Nov 65
REVISED Ⓐ 21 DEC 83 · Ⓑ 27 JUN 84

DD FORM 672-1

5306-0863

March 26 64

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.