
MS9741 (ASG)

FED SUP CLASS 5306

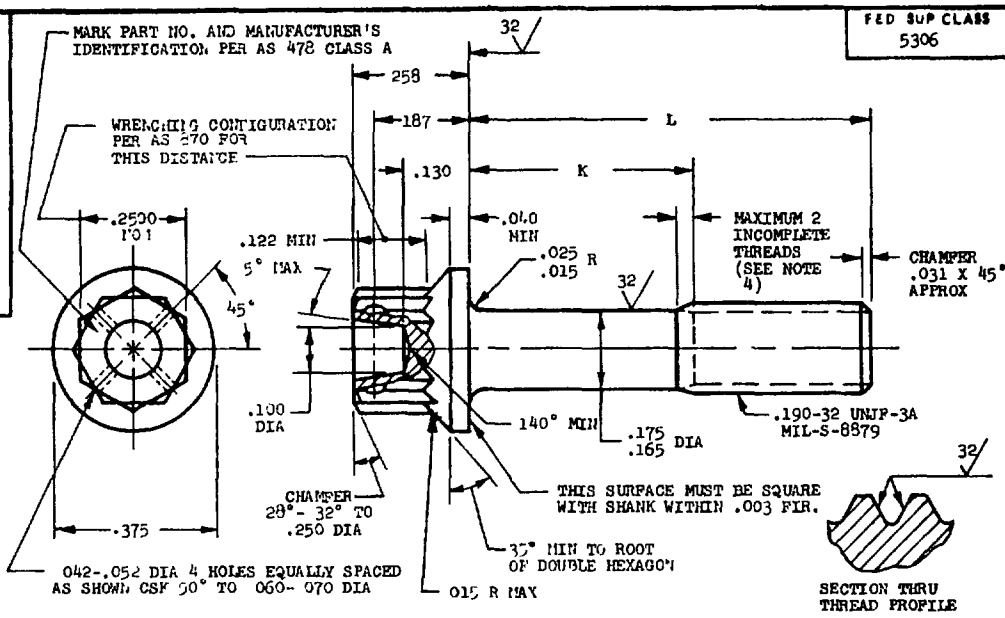

PART NO	L	K	APPROX WEIGHT LB/100
MS9741-03	.312	072- 092	66
MS9741-04	377	.072- 092	72
MS9741-05	435	.072- 092	76
MS9741-06	500	072-.092	80
MS9741-07	562	072- 092	84
MS9741-08	.625	.072- 092	88
MS9741-09	688	072- 092	92
MS9741-10	750	072- 120	.96
MS9741-11	812	122- 182	1 00
MS9741-12	87	186- 245	1 03
MS9741-13	.938	248- 308	1 07
MS9741-14	1 000	310- 370	1.11
MS9741-15	1 062	372- 432	1 15
MS9741-16	1 125	.435- 495	1 19
MS9741-17	1 188	498-.558	1 23
MS9741-18	1 250	.560- 620	1.27
MS9741-19	1 312	622- 682	1 31
MS9741-20	1 375	685-.745	1 35
MS9741-21	1 438	.748-.808	1 39
MS9741-22	1.500	.810- 870	1 43
MS9741-23	1 562	872- 932	1.47

PART NO.	L	K	APPROX WEIGHT LB/100
MS9741-24	1.625	935- .995	1.51
MS9741-25	1 688	.998-1.058	1.55
MS9741-26	1 750	1 060-1 120	1.59
MS9741-27	1 812	1 122-1 182	1 63
MS9741-28	1 875	1 185-1 245	1.67
MS9741-29	2.000	1 310-1 370	1.75
MS9741-30	2 125	1 435-1 495	1.83
MS9741-31	2 250	1 560-1 620	1 90
MS9741-32	2 375	1 685-1 745	1 98
MS9741-33	2 500	1 810-1 870	2 06
MS9741-34	2.625	1 935-1 995	2 14
MS9741-35	2 750	2 060-2 120	2 22
MS9741-36	2 875	2.185-2.245	2 30
MS9741-37	3.000	2 310-2 370	2 38
MS9741-38	3 125	2 435-2.495	2 46
MS9741-39	3 250	2 560-2 620	2 54
MS9741-40	3 375	2 685-2 745	2 62
MS9741-41	3 500	2 810-2 870	2.70
MS9741-42	3 625	2 935-2 995	2 78
MS9741-43	3 750	3 060-3 120	2 86
MS9741-44	3 875	3 185-3.245	2 94

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .006 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CRES AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES. LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV

APPROVED 1 Mar 69 REVISED

P.A. USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, CRES AMS 5643, 190-32 UNJF-3A	MILITARY STANDARD MS9741 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306 - F050
☆ U.S. GOVERNMENT PRINTING OFFICE: 1968-343-538/A 3364

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities. USAF - 82, 85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.