
MS9805

FED SUP CLASS 5306

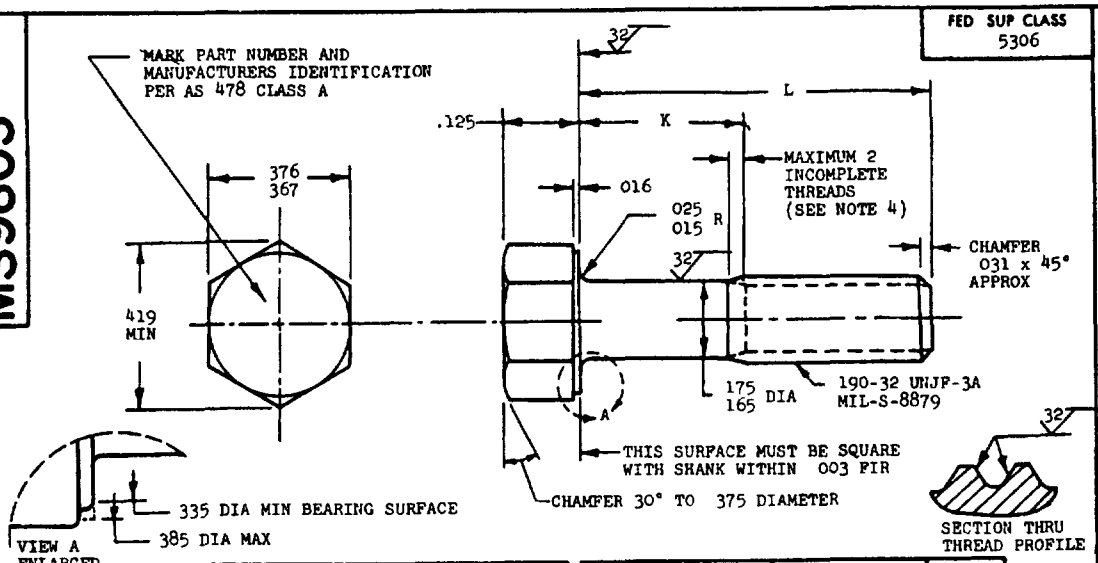

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9805-03	312	072- 092	62
MS9805-04	375	072- 092	66
MS9805-05	438	072- 092	70
MS9805-06	500	072- 092	74
MS9805-07	562	072- 092	78
MS9805-08	625	072- 092	82
MS9805-09	688	072- 092	86
MS9805-10	750	072- 120	90
MS9805-11	812	122- 182	94
MS9805-12	875	185- 245	98
MS9805-13	938	248- 308	1 02
MS9805-14	1 000	310- 370	1 07
MS9805-15	1 062	372- 432	1 11
MS9805-16	1 125	435- 495	1 15
MS9805-17	1 188	498- 558	1 19
MS9805-18	1 250	560- 620	1 23
MS9805-19	1 312	622- 682	1 27
MS9805-20	1 375	685- 745	1 30
MS9805-21	1 438	748- 808	1 34
MS9805-22	1 500	810- 870	1 38
MS9805-23	1 562	872- 932	1 42
MS9805-24	1 625	935- 995	1 46
MS9805-25	1 688	998-1 058	1 50
MS9805-26	1 750	1 060-1 120	1 54
MS9805-27	1 812	1 122-1 182	1 58
MS9805-28	1 875	1 185-1 245	1 62
MS9805-29	1 938	1 248-1 308	1 66
MS9805-30	2 000	1 310-1 370	1 70

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9805-31	2 125	1 435-1 495	1 78
MS9805-32	2 250	1 560-1 620	1 86
MS9805-33	2 375	1 685-1 745	1 94
MS9805-34	2 500	1 810-1 870	2 02
MS9805-35	2 625	1 935-1 995	2 10
MS9805-36	2 750	2 060-2 120	2 18
MS9805-37	2 875	2 185-2 245	2 26
MS9805-38	3 000	2 310-2 370	2 34
MS9805-39	3 125	2 435-2 495	2 42
MS9805-40	3 250	2 560-2 620	2 50
MS9805-41	3 375	2 685-2 745	2 58
MS9805-42	3 500	2 810-2 870	2 66
MS9805-43	3 625	2 935-2 995	2 74
MS9805-44	3 750	3 060-3 120	2 82
MS9805-45	3 875	3 185-3 245	2 90

1 SHANK SHALL BE STRAIGHT WITHIN 003 TOTAL PER INCH OF BOLT LENGTH
2 THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
3 THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN 011 FIR
4 INCOMPLETE THREADS NOT TO ENTER FILLET
5 MATERIAL CORROSION RESISTANT STEEL AMS 5643
6 HARDNESS ROCKWELL C32-38
7 MANUFACTURING SPECIFICATION AMS 7474
8 FLUORESCENT PENETRANT INSPECTION PER AMS 2645
9 SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
10 BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED
11 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°
12 DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED

P A USAF-11 Other Cust ARMY-AV NAVY-AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, PD SHANK, AMS 5643, 190-32 UNJF-3A	MILITARY STANDARD MS9805
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/S-5210

Review activities USAF-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.