INCH-POUND

A-A-50039A
November 6, 1990
SUPERSEDING
A-A-50039
September 30, 1982

COMMERCIAL ITEM DESCRIPTION

OVENS, BAKING AND ROASTING, FORCED CONVECTION, ELECTRIC

The General Services Administration has authorized the use of this commercial item description in preference to MIL-O-43633 (see 5.6).

1. CLASSIFICATION

1.1 Classification. This commercial item description covers forced convection electric ovens in the following types, sizes, and styles as specified (see 5.2).

Type I, one oven
Type II, two ovens
Size A, standard depth oven cavity
Size B, extra deep oven cavity
Style 1, 208 volts, 60 hertz, 3 phase
Style 2, 220/380 volts, 50 hertz, 3 phase, four wire system
Style 3, 240/415 volts, 50 hertz, 3 phase, four wire system

1.2 CID based part identification number (PIN). A document based PIN to identify types, sizes and styles of items included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The oven's exterior surfaces except the bottom and back shall be stainless steel conforming to any of the type 300 series of ASTM A 167. The oven compartment and door lining shall be stainless steel. Each oven compartment shall be equipped with removable stainless steel top, right and left hand side, panels and a bottom oven liner panel. Each oven

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-ES, Natick, MA 01760-5014.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

shall also be equipped with five equally spaced shelves capable of supporting a load of 20 pounds per square foor, supported by removable shelf supports, heating units, an oven light, an automatic adjustable thermostat, a two speed blower, an oven indicator light, and a 5 hour timer with alarm. All controls, switches, and indicator light(s) shall be in a control panel at the front of the oven. The oven blower and heating units shall be interconnected so that the oven blower operates whenever the heating unit circuit is engaged and the door(s) are closed. The oven shall be equipped with an air baffle and vent operated from the control panel to control moisture in the baking chamber. The oven shall preheat from ambient temperatures of 75° to 350°F in 10 minutes. The oven doors shall be vertically split, side opening type, with heat-resisting glass viewing window(s), and when closed, shall visibly seal the oven compartment. A handle shall be provided on each door, or when one handle is provided on an oven, both doors shall operate simultaneously when opening and closing. The type I oven shall be mounted on stainless steel legs or on an open or inclosed stainless steel supporting stand. The stainless steel for the legs or the stand shall conform to any of the type 300 series of ASTM A 167 or type 400 series of
ASTM A 176. All ovens shall be equipped with adjustable legs. The type II oven shall consist of two type I ovens of the same style stacked and secured. Each oven compartment shall operate independently.

2.1.1 Dimensions. The ovens shall be within the dimensional limits shown in table I.

TABLE I. Dimensions (inches)

Measurements	Size A		Size B	
	Minimum	Maximum	Minimum	Maximum
Width overall	33	40	33	40
Depth overall	32	39	38	46
Height 1/ overall (excluding vent)				
Type I	54	65	54	69
Type II	57	78	52	78
Height 1/ to bottom deck				
Type I	26	38	26	38
Type II	11	17	11	17
Height 1/ to top deck (type II)	30	51	30	51
Compartment 2/ (inside)				
Width	27	30	26	30
Depth	19	25	27	38
Height	19	22	19	24

1/ Height from floor, including supporting legs and base.

2/ Compartment configuration shall be so arranged that each shelf/rack of size A ovens will accommodate a nominal 18-inch by 26-inch (457 mm x 660 mm) sheet pan or roasting pan, and each shelf/rack size B ovens will accommodate

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:38Z
Check the source to verify that this is the currenversion before use.

two 5-set bread pans, conforming to A-A-422. Pans specified shall not interfere with oven interior and contents of the load pans shall not contact oven surfaces, shelves or racks during roasting or baking operations.

2.2 Electrical characteristics. The type I, style 1, size A or B, and the type II, style 1, size A or B shall be equipped for operation on a 208 volt, 60 Hz, 3 phase system. The type I, style 2, size A or B and the type II, style 2, size A or B shall be equipped for operation on a 220/380 volt, 50 Hz, 3 phase, four wire system. When style 2 is specified the oven heating unit shall operate on 380 volts, 3 phase and the fan and lights shall operate on 220 volts, 1 phase. An integral transformer shall be provided to step down the 220 volts for control system operations. The type I, style 3, size A or B and the type II, style 3, size A or B shall be equipped for operation on a 240/415 volt, 50 Hz, 3 phase, four wires system. When style 3 is specified the oven heating unit shall operate on 415 volts, 3 phase and the fan and lights shall operate on 240 volts, 1 phase. An integral transformer shall be provided to step down the 240 volts for control system operation. Each oven shall be equipped for permanent connection to the power source and have a total input rating of not less than 10.4 kilowatts per compartment.

2.2.1 Thermostat. Each oven compartment shall be equipped with an automatic thermostat capable of maintaining an oven temperature within the range of 200°F to 450°F. An "OFF" position shall be marked on the thermostat dial or a separate "ON-OFF" switch shall be provided.

2.3 Codes and standards. The ovens shall comply with the applicable requirements of Underwriter's Laboratories (UL) Standard No. 197 and National Sanitation Foundation (NSF) Standard No. 4.

2.4 Data name plate (Government unique requirement (see 5.4)). The oven shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the oven by rivets, screws, or by welding in such a manner as to meet the applicable National Sanitation Foundation sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (when specified see 5.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the oven.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each oven shall be cleaned, preserved, packaged, packed and unitized in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. When specified in the contract or purchase order, the oven shall be disassembled to the extent determined by the contractor to protect parts susceptible to damage during shipment and storage and for reduction of cubage. Parts removed shall be identified. The oven and parts shall be cleaned, preserved and cushioned to afford protection against corrosion, deterioration and physical damage during shipping and storage. Disassembled parts may be packaged in a class weather-resistant fiberboard box conforming to PPP-B-636 or placed within the oven or directly into the shipping container with the oven.

4.3.2 Export packing. One oven shall be packed in a snug-fitting wood-cleated plywood box conforming to domestic type, style A or J, grade B, type 3 load of PPP-B-601 or nailed wood box conforming to class 1, style 2 or 4, grade B of PPP-B-621. The contents of the box shall be cushioned, blocked, and braced to prevent movement while the box is in transit. Each shipping container shall be closed and strapped in accordance with the appendix of PPP-B-601 or PPP-B-621, as applicable.

4.3.3 Palletization. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

4.4 Marking (commercial and export). Marking of unit packs, shipping containers and palletized unit loads shall be in accordance with MIL-STD-129, or ASTM D 3951, as applicable.

5. NOTES

5.1 Intended use. The baking and roasting electric convection ovens are for use in kitchens and bakeries where combined use and time savings are required.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this document.
b. Type, size and style of oven required (see 1.1).
c. Government approved manual number to be included on the data name plate when manuals are purchased under the contract (see 2.4).
d. Type of packaging and packing required (see 4.1).
e. When palletization of shipping containers is required (see 4.3.3).

5.3 Sources of documents.

5.3.1 Sources of nongovernment association documents.

NSF Standard No. 4 - Commercial Cooking and Hot Food Storage Equipment, is available from:

National Sanitation Foundation (NSF)
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

UL Standard No. 197 - Commercial Electric Cooking Appliances, is available from:

Underwriters Laboratories, Inc., (UL)
333 Pfingsten Road
Northbrook, IL 60062

ASTM A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A 176 - Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip
ASTM D 3951 - Standard Practice for Commercial Packaging

All are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5.3.2 Source of governmental documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.5 Part Identification Number (PIN). The PINs to be used for ovens acquired by this CID are created as follows:

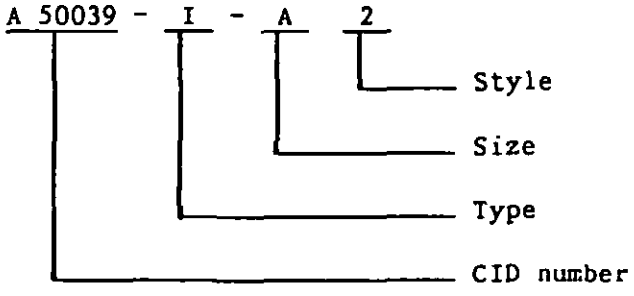

5.6 Supersession data. Except for Naval Shipboard use, this commercial item description replaces MIL-O-43633 - Ovens, Baking and Roasting, Forced Convection, Electric.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD
Navy - SA
Air Force - 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0754

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:38Z
Check the source to verify that this is the currentversion before use.