A-A-50044
March 9, 1983

COMMERCIAL ITEM DESCRIPTION

DISPENSER, SILVERWARE

The General Services Administration has authorized the use of this commercial item description in preference to Type II of Military Specification MIL-D-23828.

Salient characteristics.

The tableware dispenser shall generally conform to figure 1. It shall have two shelves and shall be supplied with 16 stainless steel flatware cylinders. The dispensers, including shelves, tray rail, and push bar shall be constructed of stainless steel. The sheet material required for the cabinet and two shelves shall be a minimum of .048 inch thick. The tray rail shall be assembled to the front of the unit and be capable of supporting an evenly distributed load of 40 pounds for 10 minutes without any permanent deformation and the dispenser, when empty, shall not tip when the load is applied to the tray rail. The tray rail and supporting hardware shall be removable or the tray rail shall be of the drop down type. The back of the dispenser shall be open to provide access to the shelves and be equipped with a push bar suitably located and installed in accordance with manufacturer's standard practice. The bottom of the dispenser shall be closed and may be considered as one of the two required shelves. The shelf or shelves shall have a minimum clear height of 11 inches. The four casters shall be of the swivel type having a minimum diameter of 5 inches and shall be capable of supporting a minimum load of 250 pounds. The casters shall be securely fastened to the dispenser by bolts, nuts, and lock washers and shall be removable for replacement. One caster at each end of the dispenser shall be equipped with a foot-operated brake. The dispenser shall be equipped with a rubber wrap-around, or corner bumpers and shall protrude a minimum of 1/2 inch beyond the dispenser. Bumpers shall also be installed on the push bar ends when the bar protrudes beyond the dispenser. The dispenser shall conform to National Sanitation Foundation Standard No. 2 and Basic Criteria C-2 as applicable. The holes on the top of the unit shall be die-cut with a 3/16 inch minimum die-stamped, turned down and/or the unit shall have guides and rests to provide support for the cylinders. The unit shall be legibly marked with the manufacturers' name or trademark and model or part numbers, National Stock Number and the contract number.

Certification.

The contractor shall certify that the product offered meets the salient characteristics of this description and conform to the producer's own drawings, specifications, standards and quality assurance practices and is the same product sold in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and there-after as may be otherwise provided for under the provisions of the contract.

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

Packaging.

A. Commercial packaging. Each dispenser shall be packaged in accordance with commercial practice.

B. Commercial packing. Each dispenser shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

C. Export packaging. The dispenser shall be disassembled to the extent determined by the supplier to protect parts susceptible to damage during shipment and storage and for reduction of cubage. Parts removed shall be identified. The dispenser and parts shall be given mechanical protection and then packaged in a style RSC, class weather-resistant fiberboard box conforming to PPP-B-636. The contents of the box shall be cushioned, blocked and braced to prevent movement while the box is in transit. The box shall be closed in accordance with method IV as specified in the appendix of PPP-B-636.

D. Export packing. One dispenser shall be packed in a snug-fitting wood-cleated plywood box conforming to domestic type, style A or J, grade B, type 2 load of PPP-B-601 or nailed wood box conforming to class 1, style 2 or 4, grade B of PPP-B-621. Each shipping container shall be closed and strapped in accordance with the appendix of PPP-B-601 or PPP-B-621, as applicable.

E. Identification Marking of Item. The silverware dispensers, accessories, and replaceable parts shall be marked for identification in accordance with MIL-STD-130.

F. Marking of shipping containers (commercial and export). Commercial marking for shipping containers is acceptable provided the following information is included:

National Stock Number
Item Description
Quantity, Unit of Issue
Date of Packaging (month/year)
Contract Number
Name, Address and Zip Code of Contractor

Source of information for nongovernment association documents:

National Sanitation Foundation (NSF) - National Sanitation Foundation, P.O. Box 1468, Ann Arbor, MI 48106

National Motor Freight Traffic Association, Inc., Agent
National Motor Freight Classification
American Trucking Associations, Inc., Traffic Department
1616 P Street, N.W., Washington, DC 20036

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:38Z
Check the source to verify that this is the currentversion before use.

Uniform Classification Committee, Agent
Uniform Freight Classification
Uniform Classification Committee, Suite 1106
222 South Riverside Plaza, Chicago, IL 60606

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD
Navy - MC, MS, YD
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITIES:


GSA - OPP

PREPARING ACTIVITY:

Army - GL

Project No. 7320-0725

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

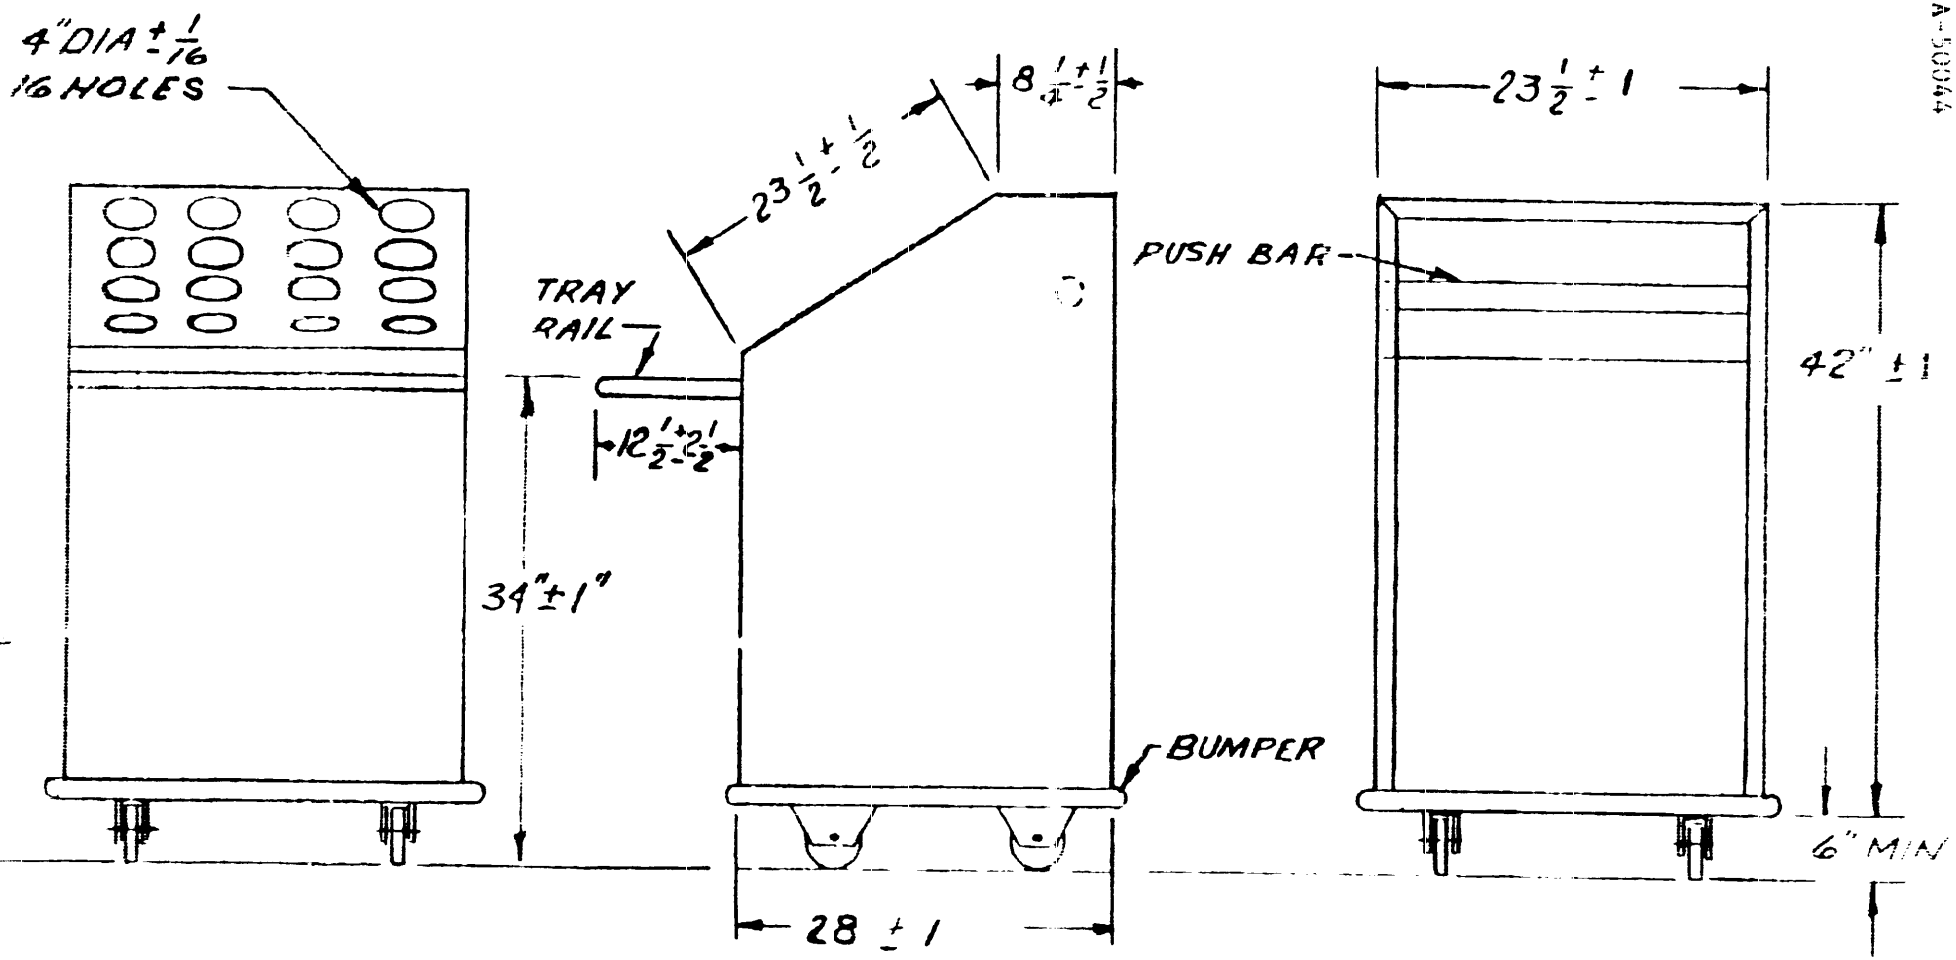

FRONT VIEW

SIDE VIEW

REAR VIEW

ALL DIMENSIONS IN INCHES

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T08:38Z
Check the source to verify that this is the current version before use.