INCH-POUND

A-A-50049A
February 15, 1990
SUPERSEDING
A-A-50049
April 19, 1983

COMMERCIAL ITEM DESCRIPTION

DISPENSER, FREEZE-DRIED COFFEE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-D-43807.


1. CLASSIFICATION

1.1 Classification. This commercial item description covers two types of 100-cups/hour dispensers (see 5.2):

Type I - 1800 watts (maximum), 120 volts, 60 Hz, single phase

Type II - 2600 watts (maximum), 220 volts, 50 Hz, single phase

1.2 Part identification number. The part identification number shall consist of the commercial item description number and the type number as follows:

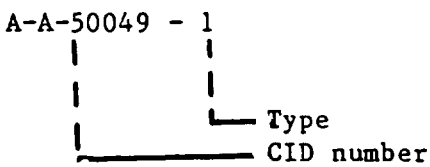

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-ES, Natick, MA 01760-5014

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The freeze-dried coffee dispenser shall be designed for countertop or tabletop use and shall be manually activated. The dispenser shall consist essentially of a water storage tank, a container for freeze-dried coffee, two push-type switches, one for coffee and one for hot water, drip-tray with grill, water heater, thermostat, plumbing, base, and the necessary controls and mixing devices to combine and dispense the water and the freeze-dried coffee in the proper proportion for the hot coffee drink. The entire unit shall be inclosed in a corrosion-resistant material cabinet. The base shall be provided with protectors to prevent damage to the surface the dispenser rests upon. The dispenser shall be complete and ready for operation when connected to electrical and water supplies. The water heater and thermostat shall be capable of raising the temperature of a full tank of water to 185 ± 5°F in no longer than 30 minutes and sustaining the heated water at that temperature while dispensing 6-ounce cup quantities at the rate of 100 cups per hour when using supply water at 50°F ± 5°F at 30 to 120 psig. The freeze-dried coffee throw shall be selected from the adjustable amounts between 1.5 ± 0.15 and 2.0 ± 0.20 grams per 6 ounces of water. The grain size of the freeze-dried coffee shall be such that the percent retained on the following ASTM E 11 sieves (U.S. standard sieves) after 5 minutes on a testing sieve shaker (RO-tap or equivalent) shall be as specified in table I.

TABLE I. Sieve requirements

Sieve number	Percent retained
8	None
12	20 max.
40	80 ± 5
pan	15 max.

2.2 Electrical requirements. The type I dispenser shall be designed to operate on a 120 volt, 60 Hertz, single phase electrical source. The type II dispenser shall be designed to operate on a 220 volt, 50 hertz, single phase electrical source.

2.3 Codes and standards. The freeze-dried coffee dispenser shall comply with Underwriters Laboratories, Inc. Standard No. 197 and National Sanitation Foundation Standard No. 18.

2.4 Data name plate (Government unique requirement see 5.4). The dispenser shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for; (a) Methods of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20 gauge corrosion resisting metal, and attached to the dispenser by rivets or screws in such a manner as to meet the applicable National Sanitation Foundation requirements for this equipment. The plate shall bear the following information which shall be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (If different from manufacturer.)
Manufacturer's Model Number
Government Approved Manual Number (when specified, see 5.4)

Each plate shall be placed so as to be readily visible to the operator during normal operation and use, and so as to not adversely affect the life or utility of the dispenser.

2.5 Recovered materials. Recycled, virgin and reclaimed materials shall be used to the maximum extent practicable in accordance with Public Law 94-580.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Tests. Prior to performing tests specified herein, the dispensers to be tested shall be operated for a period of time recommended by the manufacturer for run-in and adjustment of the units.

3.2.1 Temperature test. Connect the dispenser to a 50 $\pm$ 5°F water supply in a 70 $\pm$ 5°F ambient temperature. Draw 100 6-ounce cups for 1 hour recording the temperature at intervals to indicate any change from the stabilized temperature of 185 $\pm$ 5°F. Inability of the dispenser to function in accordance with stated temperature requirements shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

3.2.2 Product throw test. Adjust the dispenser for the minimum specified product throw (1.5 ± 0.15 grams per 6 ounces of water); then determine the average weight of 10 minimum product throws. Repeat this average weight determination for the maximum specified draw (2.0 ± 0.20 grams per 6 ounces of water). The average product throw for each adjustment shall be within the accuracy limits specfied. Inability of the dispenser to function in accordance with stated requirements shall constitute failure of the test.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2)

4.2 Commercial packaging and packing. Each dispenser shall be cleaned, preserved, packaged and packed in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each dispenser shall be cleaned, preserved, and cushioned to protect against corrosion, deterioration, and physical damage during shipment and storage.

4.3.2 Export packing. Each dispenser shall be packed in a snug-fitting fiberboard box conforming to PPP-B-636, type CF or SF, class weather-resistant, style optional. Each box shall be closed, waterproofed and reinforced in accordance with PPP-B-636.

4.4 Palletization. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

4.5 Marking (commercial and export). Marking of unit packs, shipping containers, and unit loads shall be in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5. NOTES

5.1 Intended use. The dispenser covered by this commercial item description is intended for use in dispensing hot coffee, brewed by mixing freeze-dried coffee and hot water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type required (see 1.1).
c. Government approved manual number to be included on the data name plate when manuals are purchased under the contract (see 2.4).
d. Type of packaging and packing required (see 4.1).
e. When palletization of shipping containers is required (see 4.4).

5.3 Sources of documents.

5.3.1 Sources of nongovernment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging, and

ASTM E 11 - Specification for Wire-Cloth Sieves for Testing Purposes, are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

UL Standard No. 197 - Commercial Electric Cooking Appliances, is available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

NSF Standard No. 18 - Manual Food and Beverage Dispensing Equipment, is available from:

National Sanitation Foundation (NSF)
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

5.3.2 Source of government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD, TS
Navy - YD
Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Army - GL

(Project 7310-0769)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.