A-A-2350
November 29, 1985

COMMERCIAL ITEM DESCRIPTION


HAMMERS, PNEUMATIC, PORTABLE, CHIPPING


The General Services Administration has authorized the use of this commercial item description in preference to Type II, Size 1, 2, and 3, of Federal Specification 00-H-116.

This commercial item description covers three sizes of portable pneumatic hammers intended for use in chipping and calking metals. Size 1 is intended for light work. Size 2 is intended for medium work. Size 3 is intended for heavy work.

Salient characteristics:


The chipping hammers supplied in accordance with this description shall be of the manufacturer's current design. The hammers shall be actuated by a nonleaking manual throttle. The throttle lever shall be the deadman type and shall permit easy admission and accurate regulation of the compressed air. The lever shall be conveniently located on the inside or outside of the "L" type open handle. The air inlet shall be a well secured, ferrous 3/8 inch NPT fitting located at the end of the handle. The cylinder shall be heat treated to a hardness of 45 to 63 on the Rockwell "C" scale. The piston shall be heat treated to a hardness of 50 to 62 on the Rockwell "C" scale. The hammers shall withstand the shocks and stresses encountered during normal operation without malfunction or failure. Parts requiring lubrication shall be protected from the entrance of foreign matter and loss of lubricant. The hammers shall provide for the delivery of lubricant in a manner that will assure proper operation. The hammer bushing shall accommodate the chisel shank styles as shown in the figures below. Chisel shanks shall be as specified in the contract or order. All dimensions are in inches.

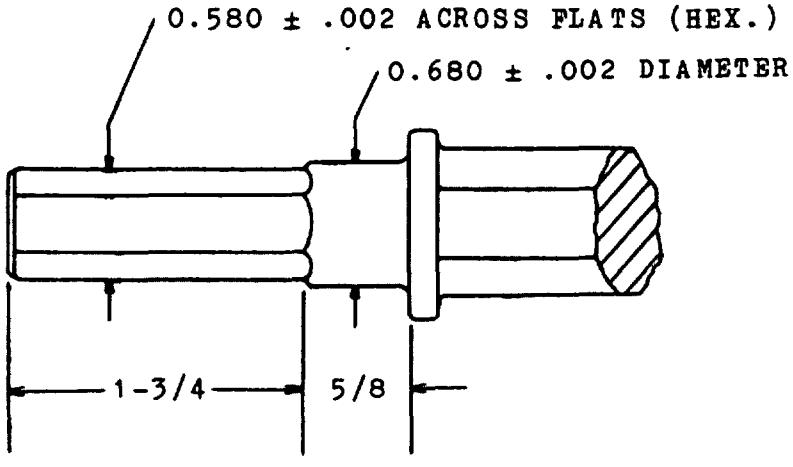

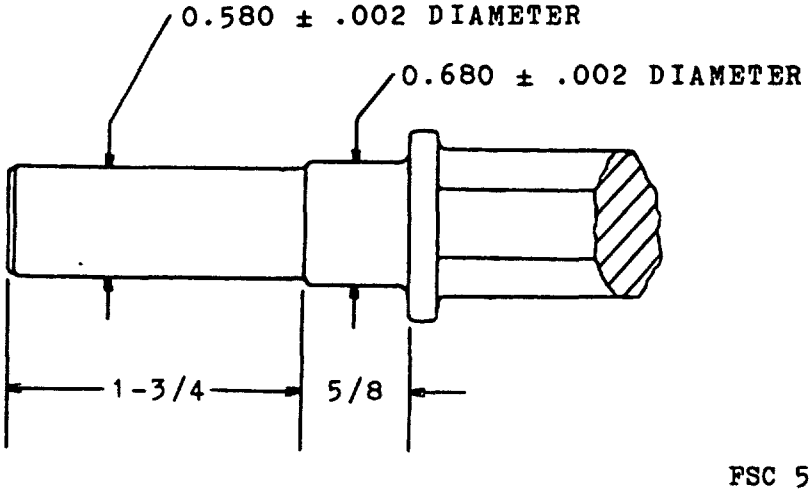

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.

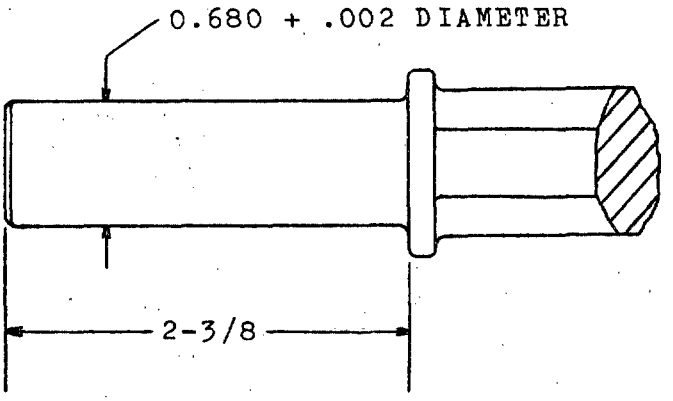

The hammers shall comply with the requirements of the table.

National Stock Number (NSN)	Size	Maximum weight* (lbs)	Max. length (in)	Bore (in)	Stroke (in)	Max. air consumption** (CFM)	Impact frequency. (per min.)
5130-00-889-8983	1	14-3/4	13	1-1/8	1	30	2500
5130-00-889-8984	2	15-1/8	14-1/2	1-1/8	2	34	2100
5130-00-190-6440	3	16-5/8	15-3/4	1-1/8	3	36	1725

* - less retainer
** - under load at 90 psig

The hammers shall operate properly at pressures between 80 and 100 psig and shall comply with all applicable OSHA requirements. The hammers shall be furnished with retainers which will accept chisels with round or oval collars, a complete set of the manufacturer's current operating and maintenance instructions, a parts list breakdown, and any tools, equipment, and accessories necessary to assure efficient operation in accordance with the operating instructions and any tools, equipment, and accessories normally supplied commercially. The hammers shall be marked in a plain, permanent, and legible manner with the manufacturer's name, trademark, country of origin, and model and serial number.

Testing requirements. The hammers shall be tested as follows:

Impact frequency shall be determined using an "Askania" hand vibrograph or any other suitable vibrometer.

A service test shall be conducted on one randomly selected hammer from each lot to determine durability of the hammers and all components, ease of operation, and general serviceability. The service test shall consist of the following:

The hammer shall satisfactorily complete a simulated service test of 150 hours. The hammer shall be operated for 10 seconds on and 30 seconds off under no load.

After completion of the above test, the hammer shall satisfactorily complete a practical service test of 4 hours. The hammer shall be tested using a blunt chisel in a vertical position under a 25 pound axial load at a constant controlled pressure of 90 psig against plate steel. Upon completion of the test, the hammer shall retain a pressure of 120 psig for a period of 15 minutes and be free of air leaks.

Workmanship. The chipping hammers and accessory components shall be free of any defects which may impair serviceability, durability, or appearance.

Source: https://assist.dla.mil --Downloaded: 202610-26T08:22Z
Check the source to verify that this is the current version before use.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.