[METRIC]

A-A-72B
June 5,1992
SUPERSEDING
A-A-72A
November 26, 1986

COMMERCIAL ITEM DESCRIPTION
CRAYON, MARKING, LUMBER

This Commercial Item Description is approved by the Commissioner, Federal Supply Services, General Services Administration, for the use of all Federal agencies.

This commercial item description covers extruded crayons for marking on green, wet, and dry lumber.

1. Salient Characteristics

A. The crayons shall produce smooth and uniform marking qualities and shall consist of a clay base consisting of a mixture of pigment or suitable coloring matter, a good grade of clay and a satisfactory binder.

B. The crayon shall meet the requirements in section 2 when tested with the appropriate test method.

C. The crayons shall have a minimum length of 11.43 cm ± .08 cm (4-1/2 inches ± 1/32 inches) and the width between opposite sides of 1.27 cm ± 0.08 cm (1/2 inch ± 1/32 inch) (SEE FIG 1).

D. The crayon shall be of the colors specified, blue, black, red or yellow (See Section 7).

E. The crayon shall be hexagonally shaped with a point at one end.

F. The crayons shall be individually marked with the manufacturer's name or trademark and the color of the crayon on a durable paper wrapper. The paper wrapper shall be securely fastened to the sides of the crayon, and shall be 1.91 cm ± 0.64 cm (3/4 ± 1/4 inch) from the pointed end and extend to within 0.95 cm ± 0.32 cm (3/8 ± 1/8 inch) of the blunt end (SEE FIG 1) .

G. The crayon shall have hardness as tested by the breaking strength test specified in Section 2 (See Section 7).

Workmanship. The crayons shall be free from any defect that may affect its serviceability, durability and appearance.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

2. Tests

The crayons shall pass the following tests on smooth, untreated wood.

A. Color Fastness. Six to eight lines shall be drawn with a sample crayon on the face of a piece of wood. Care should be taken to maintain uniform pressure in drawing all lines. Approximately half of each of the lines shall be covered with suitable material to protect it from radiation from the arc lamp. The marked face of the wood shall be exposed for 40 hours to the radiation from a glass-enclosed carbon-arc lamp, such as the Fade-Ometer, with a current of approximately 13 amperes and 140 volts at the arc. The lamp shall be so ventilated that the temperature at the face of the wood shall not exceed 41 degrees C (105 degrees F). There shall be no appreciable fading of the color of the exposed area as compared with the unexposed area.

B. Water Resistance. Markings shall be made with the sample crayon on wood that shall then be immersed in water at 21 to 24 Degrees C (70 to 75 degrees F) for a period of 24 hours. There shall be no bleeding of the markings.

Note: The "color fastness" and "water resistance" tests which are described in paragraphs 2.A and 2.B shall be run for the first production lot for each color on a contract. Thereafter, a certification will be acceptable as long as the production methods, crayon formulas and quality level do not change.

C. Breaking Strength. Place one crayon perpendicular across two horizontal and parallel notched metal supports 0.64 cm (1/4 inch) wide. The supports shall be set 6.35 cm (2-1/2 inches) apart center to center. The test load shall be applied perpendicular to the crayon surface with a 0.64 cm (1/4 inch) wide rod in a vertical direction. The test load shall be applied at the midpoint of the crayon as supported by the notched supports resting on a platform scale or any other means of accurately indicating the applied load). A baseline calibration load of 1.36 kg (3 pounds) should be Gradually applied. The test load shall be a minimum of 6.80 kg (15 pounds) for the soft crayon and 11.34 kg (25 pounds) for the hard crayon. Gradually apply and increase the test load up to the respective minimum requirement. Maintain this load for 30 seconds. The crayon shall be of sufficient hardness to withstand the breaking strength test up to and including the minimum load specified without breaking

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

3. Quality Assurance

Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the Commercial Item Description, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements (See Section 7, Ordering Data).

Unless otherwise specified, each lot of crayons shall be inspected for conformance to the requirements herein. Sampling for inspection shall be in accordance with MIL-STD-105 using the plans specified below.

A. Sampling for visual examination - Inspection Level S-3 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one crayon.

B. Sampling for dimensional examination - Inspection Level S-3 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one crayon.

C. Sampling for end item testing - Inspection Level S-3 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one crayon.

D. Packaging, Packing, and Marking - Inspection Level S-2 with an AQL of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

4. Preparation for delivery

Packaging, packing and marking shall be as specified in the contract or purchase order.

5. Application for copies of technical documents referenced herein: The issue date in effect on date of invitation for bids or request for proposal shall be apply.

MIL-STD-105 is available from Standardization Documents Order Desk; Building 4D; 700 Robbins Avenue; Philadelphia, PA 19111-5094.

Public Law 94-580, Resource Conservation and Recovery Act, is part of U.S. Code, Title 42. Available from the Congressional Sales Office, U.S. Government Printing Office, Washington, D.C. 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

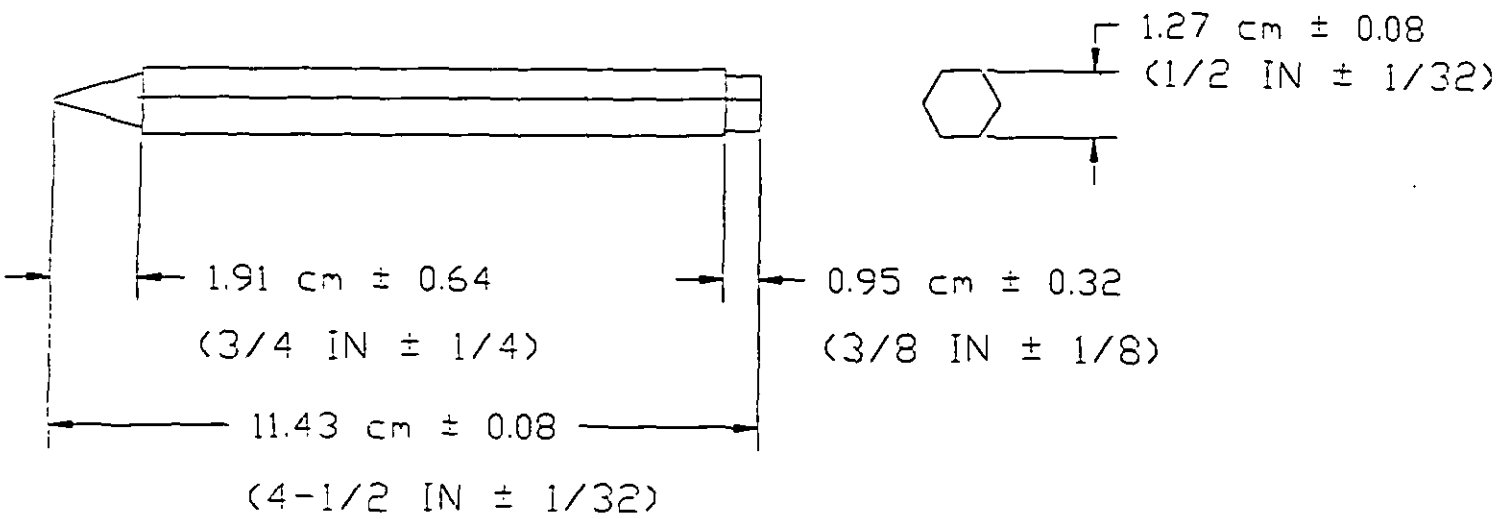


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

6. Regulatory Requirements

The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

7. Ordering Data

Procurement documents should specify the following:

(1) Color.
(2) Hardness.
(3) Packaging, packing and marking.

8. Cross Reference

C.I.D. A-A-72B	C.I.D. A-A-72A
Grade A is eliminated.	Grade A - Graphite and clay base
References Clay base only. (formerly "Grade B")	Grade B - Clay base

MILITARY INTERESTS:
None Registered

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:04Z
Check the source to verify that this is the current version before use.