NOT MEASUREMENT SENSITIVE

MIL-DTL-14631/14B
21 March 1997
SUPERSEDING
MIL-P-14631/14A
5 February 1992

DETAIL SPECIFICATION SHEET

PLATE, AUTOMOBILE, INDIVIDUAL, LIEUTENANT GENERAL, U.S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14631 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

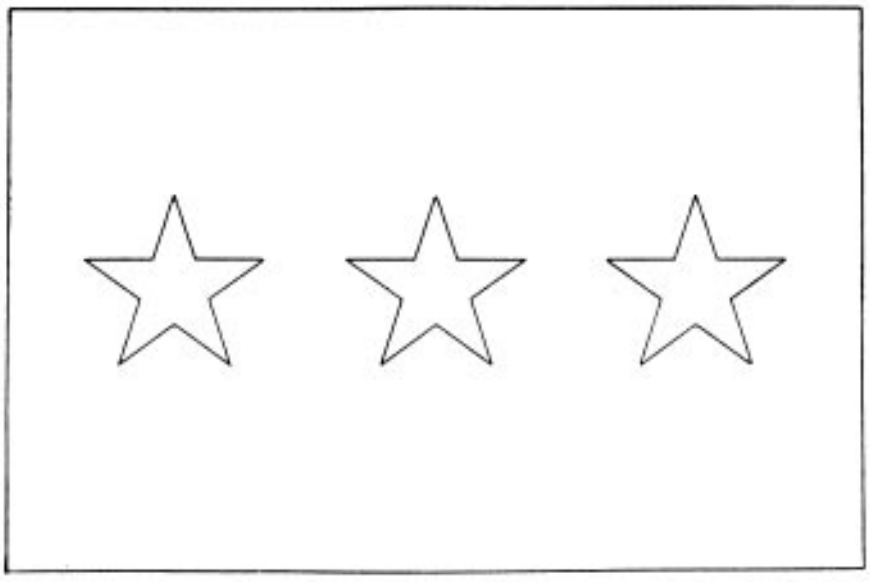

MATERIAL:
BASE: Aluminum
STAR: Brass
DIMENSIONS:
BASE:
HEIGHT (Overall): 6 inches ± 1/16 inch (15.24 cm + 0.16 cm)
WIDTH: 9 inches ± 1/16 inch (22.86 cm + 0.16 cm)
THICKNESS: 0.064 inch ± 0.003 inch (0.162 cm + 0.007 cm)
STAR:
DIAMETER: 1-7/8 inches (4.76 cm) (REF)
THICKNESS: 0.155 inch ± 0.020 inch (0.393 cm + 0.050 cm)

AMSC N/A FSC 8345
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:37Z
Check the source to verify that this is the current version before use.

FINISH:
PLATE BASE: Enameled (See Note 1.)
EMBOSSED STAR: Nickel Plated, Rhodium Plated, Mirror-Like Polished.

NOTES:
1. Enamel color for Dash No. 1 and 2 shall match the chip number of FED-STD-595 as follows or the standard sample.

DASH NO.	COLOR/CHIP NO.
1	Scarlet (11350)
2	Maroon (10049)

2. Star position and details for stud, wing nut and registration prongs shall be as shown on Figure 1 (DWG 4-4-81).

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8345-0224)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:37Z
Check the source to verify that this is the current version before use.