MIL-C-36988
26 July 1973

MILITARY SPECIFICATION

CAP, OPERATING, SURGICAL, Man's, Universal Size, Disposable, 500s.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a disposable cap of universal size. The cap is suitable for one-time use by hospital personnel.

1.2 Classification. The cap covered by this specification shall be of one type and one size.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposals, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

UU-P-268	Paper, Kraft, Untreated, Wrapping
PPP-B-636	Box, Fiberboard

STANDARDS

Federal

FED-TEST-METHOD STD NO. 191	Textile Test Methods

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 20261O-21T09:43Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Crown material. The crown material shall be a nonwoven fabric consisting of 100 + 0 - 5 percent viscose rayon fibers bonded with a resin adhesive. This material shall be an all-textile product made from a carded web or randomized web structure. The material shall be fire retardant treated. The finished nonwoven material shall be soft, lint-free, absorbent, non-toxic and non-irritating. The breaking strength shall be a minimum of 4 pounds in the machine direction and 1 pound in the cross direction. Flame resistance shall be 3.5 seconds minimum.

3.2 Side panel material. The side panel material shall be manufactured from cellulosic or synthetic fiber or a combination thereof, and may be wet or dry formed, or scrim, or fiber reinforced at the manufacturer's option. The material shall be fire retardant treated. The finished nonwoven material shall be soft, lint-free, absorbent, non-toxic and non-irritating. The breaking strength shall be a minimum of 10 pounds in the machine direction and 7 pounds in the cross direction. Flame resistance shall be 3.5 seconds minimum.

3.3 Color. The crown material (3.1) shall be green, blue, blue-green or white. The side panel material (3.2) shall be green, blue, or blue-green.

3.4 Binding and tie tapes. The binding and tie tapes shall be made from the side panel material (3.2) or any other suitable nonwoven fabric. The color shall be green, blue, blue-green, or white. Flame resistance shall be 3.5 seconds minimum.

3.5 Thread. The thread for seaming shall be cotton, white and of a suitable size, at the manufacturer's option, for the purpose intended.

3.6 Design. The cap shall be universal size, oval shape, open back design. The cap shall have a tear-drop shaped crown, one-piece side panel or band, binding covered edges, with binding tie-tape extensions to permit size adjustment. See Figure 1 for basic design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

3.7 Construction. The cap shall be fabricated by joining the tear-drop shaped crown and one-piece side panel or band with a 500 class stitch, seam type SSa-1, with a minimum of 8 stitches per inch. The side panel edges shall be bound with non-woven binding using stitch class 301 or 401, seam type BSc-1, with a minimum of 6 stitches per inch. The binding shall extend a minimum of 5 inches on each side to serve as tie-tapes. The binding and tie-tapes shall finish 1/4 to 1/2 inch in width.

3.8 Measurements. The minimum finished measurements shall conform to table I.

Table I. Minimum Finished Measurements

Figure 1	Measurement
A	5
B	11
C	5
D	5 1/2
E	4
F	9

3.9 Workmanship. The finished cap shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of conformance. Where certificates of conformance are submitted, the Government reserves the right to check test such item to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated herein.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, and standards unless otherwise excluded, amended, modified or qualified in the specification or applicable purchase document.

4.2.1.1 Testing of components. The components listed in table II shall be tested for the characteristics shown therein. The method of testing specified in FED. STD. NO. 191, whenever applicable, and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample unit shall be 2 yards normal width of the finished material. The lot size shall be expressed in units of one yard. The lot shall be unacceptable if one or more of the sample units fail to meet any requirement specified. The inspection level shall be S-1 of MIL-STD-105.

Table II. Test Methods

Component	Characteristic	Requirement paragraph	Test Method
Crown material	Breaking strength machine direction cross direction	3.1	5100
	Flame resistance	3.1	5908 1/
Side panel material	Breaking strength machine direction cross direction	3.2	5100
	Flame resistance	3.2	5908 1/
Binding and tie-tape material	Flame resistance	3.4	5908 1/

1/ Burning rate - 45 degree angle.
When the binding and tie tape material is the same as the side panel material, it is not necessary to test again for flame resistance.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:43Z
Check the source to verify that this is the current version before use.

4.2.2 Examination of the end item. The defects found during this examination shall be classified in accordance with defects listed in 4.2.2.1 and 4.2.2.2. The sample unit shall be one cap.

4.2.2.1 Classification of defects. All visual defects shall be classified as indicated in table III. The inspection level shall be level S-3 of MIL-STD-105. The acceptable quality levels shall be 2.5 for major defects and 4.0 for minor defects, expressed in defects per hundred units (DHU).

Table III. Classification of defects

Major	
101	Any cuts, holes, tears, mends or patches.
102	Binding, tie tapes omitted.
103	Spots, stains clearly visible at 3 feet distance.
104	Incorrect design.
Minor	
201	Color not as specified.
202	Incorrect stitch class or seam type.
203	Stitches per inch less than minimum.
204	Binding, tie tapes twisted.

4.2.2.2 Examination for dimensional defects. During this examination any measurement smaller than the dimensions specified for figure 1 shall be classified a defect. The sample size shall be selected in accordance with inspection level S-3 of MIL-STD-105. The acceptable quality level shall be 4.0 defects per hundred units.

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed shall be examined on shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Examine	
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of caps per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One package containing five hundred caps, as specified, constitutes one unit of issue.

5.1.2 Level A:

5.1.3.1 Unit package. Five hundred caps shall be neatly stacked and packaged in a polyethylene bag having an average wall thickness of not less than 0.002 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape and closure of the bag effected by heat sealing

5.1.4 Level C: Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be a box of appropriate size constructed in accordance with PPP-B-636, grade V3c. Closure and waterproofing shall be as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be a carton of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Closure shall conform to method II of PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Marking shall not be required for unit packages.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The disposable cap covered by this specification is suitable for one-time use by hospital personnel.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

6.3 This specification does not include all types, classes, grades or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types which are normally procured to meet Military requirements.

6.4 This specification is intended to cover the following item appearing in the Federal Supply Catalog:

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-118-1051	CAP, OPERATING, SURGICAL, Man's, Universal Size, Disposable, 500s.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1068

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

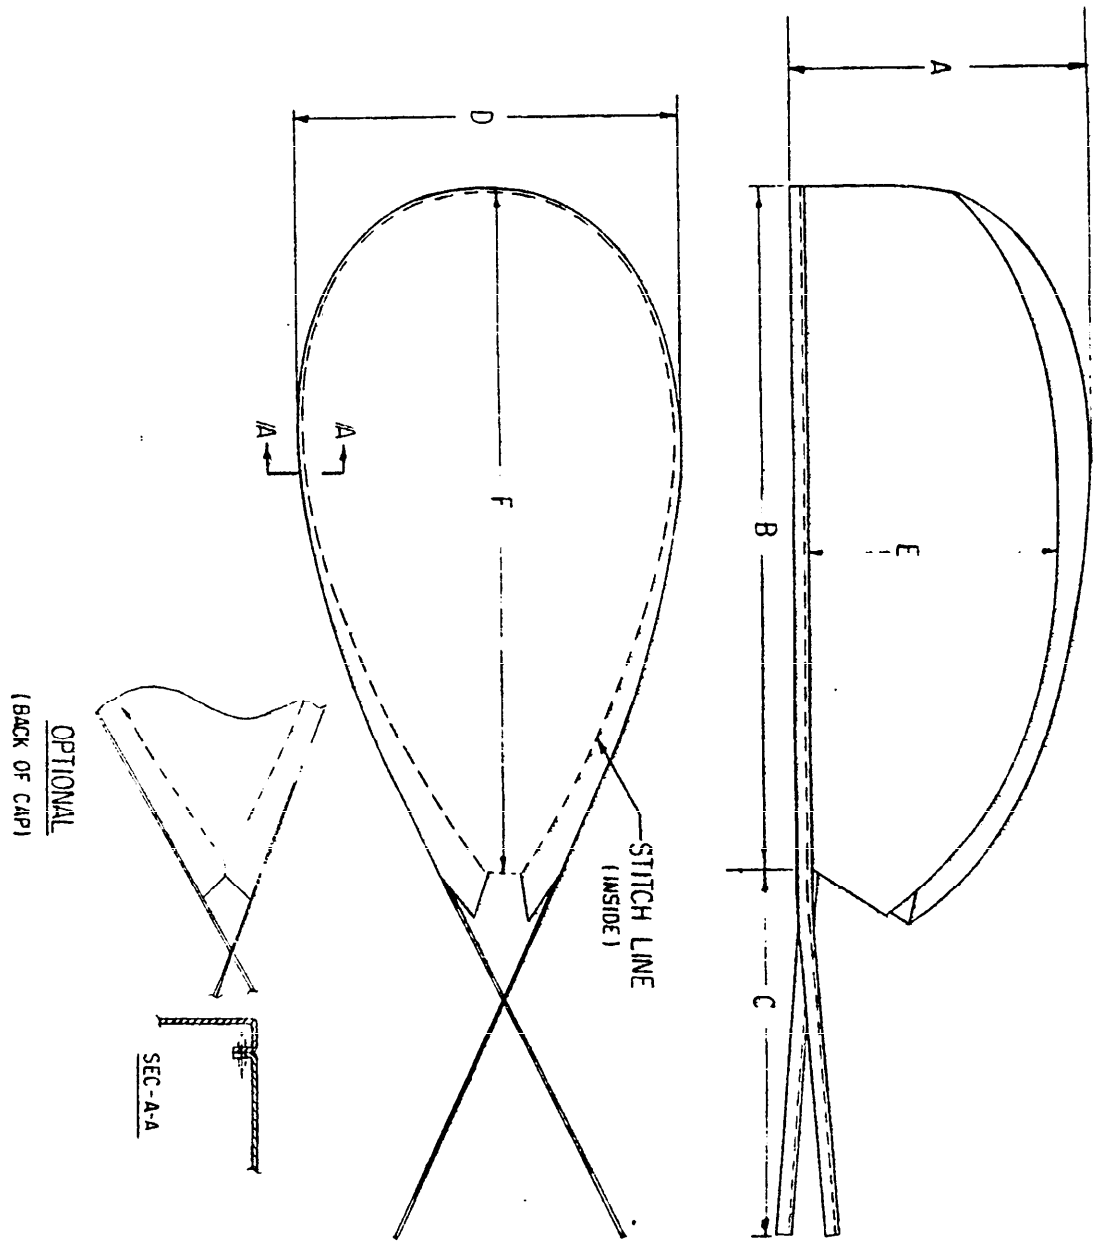


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Defense Personnel Support Center
ATTN: DPSC-N
2800 South 20th Street
Philadelphia, Pennsylvania 19101
Attn: DPSC-ATTS

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.