MILITARY SPECIFICATION

ELEVATOR, PERIOSTEAL, HAIGHT, 12 INCH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of periosteal elevator suitable for use in thoracic surgical procedures.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

GG-I-526	Instruments, Dental and Surgical; General Specifications.
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Box, Wood, Wirebound.
PPP-B-601	Box, Wood, Cleated-plywood.
PPP-B-621	Box, Wood, Nailed and Lock-corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Set-up.

Military

MIL-P-116	Preservation, Methods of.
MIL-L-10547	Liners, Case and Sheet, Overwrap; Water-Vaporproof or Waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:39Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

3. REQUIREMENTS

3.1 General requirements. The periosteal elevator shall be in accordance with the applicable requirements of GG-I-526, and the following option exercises under that specification:

3.2 Material. The shanks and blades shall be class 4, type 420. The handle shall be class 3, alloy number 260 or 752 and shall meet the applicable corrosion resistance requirements. As an alternate, the handle may be class 4 steel with a carbon content of 0.15 percent maximum and a chromium content of 12.0 to 15.0 percent, and shall meet corrosion tests specified for class 4 alloys.

3.3 Hardness. After proper heat treatment, blades and shanks shall have a Rockwell hardness of C 40 minimum.

3.4 Style, design and dimensions. Shall be a double-ended periosteal elevator, Cameron Haight design, and suitable for use in thoracic surgery. Handle shall be hollow, to which shanks shall be securely attached by silver soldering and chromium over nickel plated. Alternate handle shall be hollow, to which shanks shall be welded, using appropriate stainless welding process, and followed by appropriate heat treatment. Shall be in accordance with Figure 1.


3.5 Finish. Shall be mirror, or mirror and satin.

3.6 Identification marking. Instruments of foreign manufacture shall also be marked "stainless".

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:39Z
Check the source to verify that this is the currentversion before use.

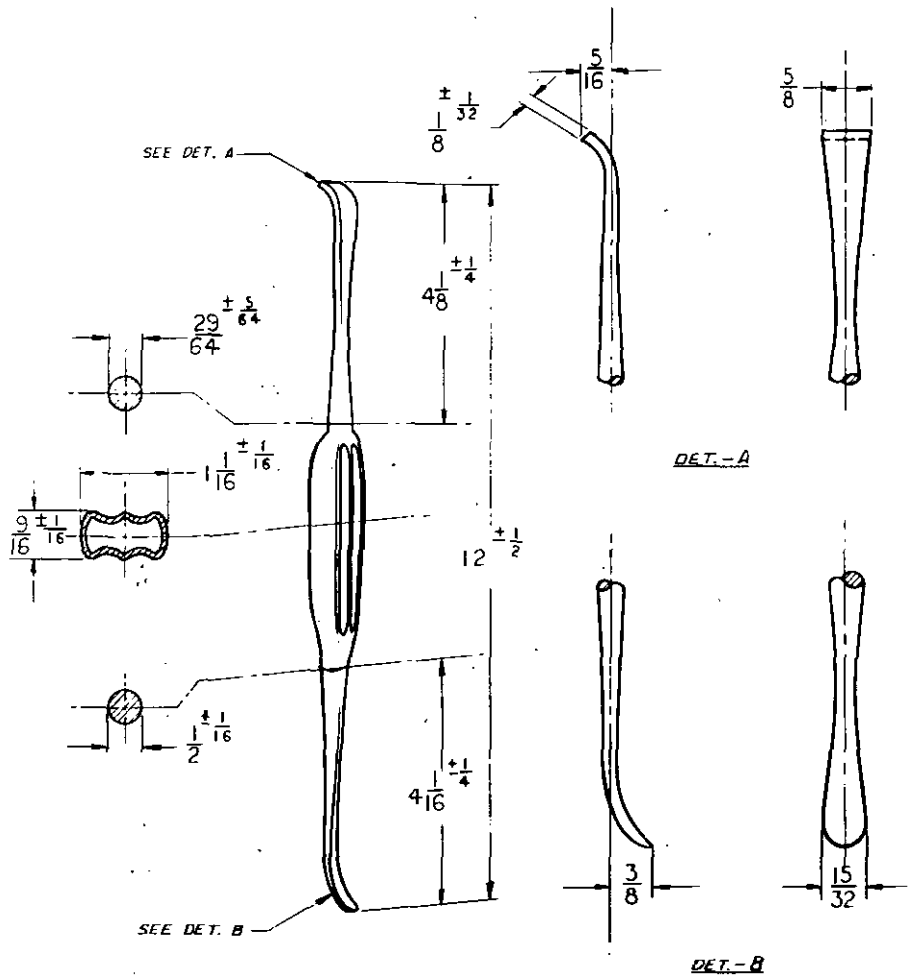

NOTE:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCE ON DIMENSIONS SHALL BE ±1/32 INCH.

JOINTS SHALL BE FIRMLY SECURED. FOR BRASS OR NICKEL SILVER HANDLE USE SILVER SOLDER. FOR ALTERNATE STAINLESS STEEL HANDLE USE APPROPRIATE STAINLESS WELDING PROCESS. WELDING MUST BE FOLLOWED BY APPROPRIATE HEAT TREATMENT.

TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.

FIGURE 1

ELEVATOR, PERIOSTEAL, HAIGHT, 12 INCH

Source: https://assist.dla.mil -- Downloaded: 20260-21T09:39Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the stainless steel and brass, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the FSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in Table I. The unit of product for examination purposes shall be one periosteal elevator.

Table I. Sampling for Examination

Type of defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor	II	2.5

4.2.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as indicated in Table II. Wherever feasible, the same sample shall be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:39Z
Check the source to verify that this is the current version before use.

Table II. Sampling for Tests

Component (Unit of Product)	Characteristic *	Requirement	Test Procedure	Inspection level	AQL
1 elevator	Composition analysis	3.2 and GG-I-526	GG-I-526	**	---
1 elevator	Dimensions	3.4	--------	S-2	2.5
1 handle	Boil test	GG-I-526	GG-I-526	S-2	1.0
1 handle	Thickness of coating	GG-I-526	GG-I-526	S-2	1.0
1 handle	Salt-spray test	GG-I-526	GG-I-526	S-2	1.0
1 shank	Hardness	3.3 and GG-I-526	GG-I-526	S-2	1.0
1 shank	Copper sulfate	GG-I-526	GG-I-526	S-2	1.0
1 shank	Boil test	GG-I-526	GG-I-526	S-2	1.0

* Tests to be performed as necessary.
** Sufficient amount from each lot of each metal used in the construction of the elevator shall be selected for composition analysis.

4.3 Examination. The periosteal elevator shall be examined to determine compliance with specification requirements. Examination shall be conducted in accordance with MIL-STD-105 and the following classification of defects. Examination shall include, but shall not be limited to the defects listed in Table III.

Table III. Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Style and design not as specified.
102	Instrument not constructed as specified.
103	Instrument not free from sharp edges, rough areas, burrs, cracks, grind marks, or overlaps.
Minor	
201	Finish not as specified.
202	Instrument not permanently and legibly marked with either the name or trademark of the contractor.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One elvator as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	144 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Shall not be utilized.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method IC-2.

5.1.3.5 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except commercial colors will acceptable, or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:39Z
Check the source to verify that this is the currenversion before use.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, type CF, class weather-resistant. Closure and strapping shall be in accordance with appendix of applicable box specification. Fiberboard boxes shall conform to the special requirements as specified in Table II of PPP-B-636.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard boxes shall be waterproofed in accordance with 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, domestic type; or shall be designed for type 2 load and constructed in accordance with PPP-B-585, style 3, for class 2 use; PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure shall be in accordance with appendix of applicable box specification. Fiberboard box shall be closed by method II as specified in PPP-B-636. In addition, fiberboard boxes shall conform to the special requirements as specified in Table I of PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:39Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The periosteal elevators are intended for use in costal periosteal elevation.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and the procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification is intended to cover the following item appearing in the Federal Supply Catalog:

Federal Stock No.	Item Identification
6515-299-8753	ELEVATOR, PERIOSTEAL, Haight, 12 inch.

It does not include all types or sizes as indicated by the title nor all types which are commercially available.

6.4 Supersession data . This specification includes requirements of Purchase Description No. 8, dated 9 December 1966 for FSN 6515-299-8753 ELEVATOR, PERIOSTEAL, Haight, 12 inch.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1715

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-E-36962

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:39Z
Check the source to verify that this is the current version before use.