MILITARY SPECIFICATION

GOWN, OPERATING, SURGICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a cotton operating gown used by surgical team members.

1.2 Classification. The gown shall be of three sizes, as specified (see 6.2)

Sizes	Medium
	Large
	Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton.
JJ-S-746	Stockinet, Surgical.
DDD-L-20	Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap, water-vaporproof or Waterproof, Flexible
MIL-F-10884	Fasteners, Snap

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings.
FED-Test Method Std No. 191	Textile Test Methods.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication The following document forms a part of this specification to the extent specified herein Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

STANDARD COLOR CARD OF AMERICA

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc 200 Madison Avenue, New York, N Y. 10016.)

3 REQUIREMENTS

3.1 Materials.

3.1.1 Basic fabric. The base fabric shall be 100 percent cotton conforming to the following requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE I - Requirements

Characteristic	Requirement
Weave	plain
Yarn ply - warp and filling	single
Weight - oz. sq. yd., min.	5.0
Nonfibrous materials - percent, max.	2.0
pH - min. and max.	5.0 and 9.0
Yarns - inch, min.	
Warp	65
Filling	35
Breaking strength - lbs. min.	
Warp	125
Filling	100
Shrinkage - percent, max.	
Warp	2.0
Filling	2.0

3.1.2 Barrier fabric The barrier fabric shall be 100 percent long staple combed cotton conforming to the following requirements

TABLE II - Requirements

Characteristic	Requirement
Weave	Oxford
Yarn ply - warp and filling	2
Weight - oz. sq. yd., min	5.7
Nonfibrous materials - percent, max.	2.0
Yarns - inch, min.	
Warp	184
Filling	80
Breaking strength - lbs., min.	
Warp	160
Filling	75
Shrinkage - percent, max	
Warp	1.0
Filling	1.0
pH - min. and max.	5.0 and 9.0
Air permeability - cu. ft. min. sq. ft., max.	2.0
Water repellency - spray rating	90-90-90

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

3.2 Color. The color of the base fabric (3.1.1) shall be Grayish Green Shade No. 180; and for the barrier fabric (3.1.2) shall be commercial Pewter Green. The use of dyes or substances containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed and finished fabrics (3.1.1 and 3.1.2) shall show not more than a slight trace of sulfur.

3.2.1 Matching. The color of the fabrics (3.1.1 and 3.1.2) shall be a good approximation to the specified colors under natural (north sky) daylight or artificial daylight having a good approximation under incandescent lamplight at 2800° Kelvin.

3.2.2 Colorfastness. The dyed and finished fabrics (3.1.1 and 3.1.2) shall show "fair" fastness to light at 40 hours, and "good" fastness to laundering, perspiration and crocking.

3.3 Thread. The thread for seaming and stitching shall be cotton conforming to type IA3, ticket Nos. 50/3 and 70/2 of V-T-276. The thread shall be dyed Gray Green Shade AN, Cable No. 66055.

3.3.1 Colorfastness. The dyed thread shall show "fair" fastness to light and "good" fastness to laundering and perspiration.

3.4 Stockinet material. The stockinet material used for the cuffs shall be seamless, tubular, 3 inches in width, conforming to type I of JJ-S-746. The bursting strength for type I material shall be 75 points minimum. The crosswise stretch (width direction) of a double layer of the type I material shall be a minimum of 5 inches. The color shall be a good approximation to the base fabric (3.1.1).

3.5 Label. Each gown shall have a combination size and identification label conforming to type I, classes 1 and 2 of DDD-L-20, except the color of the finished label shall be dyed (see 3.5.2). As an alternate, a combination size and identification label constructed of cotton coutil cloth or poplin having a greige weight of 2.11 yards per pound based on 45 inch width may be used. The cloth shall be dyed in colors as specified in 3.5.2. The label shall be a sew-on type.

3.5.1 Printing.- The label shall be printed in accordance with type I classes 1 and 2 of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

3 5.2 Color - The combination size and identification label shall be dyed one of the following colors (in conformance with the Standard Color Card of America, 9th Edition) for the appropriate size.

Lemon Yellow (Cable No. 70205) - For Medium size
Indian Orange (Cable No. 70072) - For Large size
Primitive Green (Cable No. 70167)- For Extra Large size

The colorfastness to laundering requirements of DDD-L-20 shall apply

3.6 Fasteners Fasteners shall conform to style 3, finish 3 of MIL-F-10884. All parts shall be nickel plated.

3.7 Design. The gown shall be full length with an open and overlapping back; adjustable snap fastener closures at the neck and waist, long sleeves finished with stockinet cuffs The front area of the gown, from approximately the top of the armpits to the thigh area, and the lower sleeve area from approximately the elbow to the beginning of the cuff, shall be fabricated from barrier fabric (3.1.2). The remainder of the gown, except for the cuffs, shall be fabricated from the base fabric (3 1.1).

3.8 Figure 1. The figure is furnished for information only To the extent of any inconsistencies between the written specification and the figure, the specification shall govern

3.9 Patterns Standard patterns for use in cutting working patterns will be furnished by the Government The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembling The patterns provide a 1/2 inch seam allowance for all double-lapped, double-stitched seams, and 3/8 inch for all other seams, unless otherwise indicated

3 9 1 List of pattern parts The component parts of the gown shall be cut from the specified materials in accordance with the number of parts required

TABLE III - List of pattern parts

Material	Pattern Part	Cut Parts
Base fabric	Left back panel	1
	Right back panel	1
	Right center back panel	1
	Top front	1
	Bottom front	1
	Upper sleeve-left and right	4
	Reinforcement pieces	
	sleeve	1
	front	1
	right back side	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE III - List of pattern parts (cont'd)

Material	Pattern Part	Cut Parts
Barrier fabric	Middle front	1
	Lower sleeve - left and right	2

3.10 Stitches, seams and stitching - Stitch, seam and stitching types specified in table IV shall conform to Fed. Std. No. 751. When two or more seam or stitching types are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the garment Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams shall result The gage of stitching shall be 1/4 to 5/16 inch for all double-lapped, double-stitched seams with the outer row of stitching 1/16 inch from edge on outside of garment.

3.10.1 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in table IV.

3.10.2 Thread breaks and ends of seams.- Ends of all seams or stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks, all stitch types, shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming, may be repaired by using 301 stitch type.

3.11 Marking. The parts of the gown shall be marked to insure correct size and a uniform shade throughout Any method of marking may be used except

(a) Metal fastening devices
(b) Sew-on type markings.
(c) Adhesive type markings which leave an impression or traces of paper or adhesive on the material upon removal of the marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE IV

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting - a. Cut gowns in strict accordance with patterns, which show, size, shape, directional lines and notches for proper assembly. Directional lines shall be in the warp direction. b. Cut all major component parts in the warp direction. Minor component parts may be cut in either the warp or filling direction. c. The stockinet used for the cuffs shall be cut in sufficient lengths so as to finish 4 ± 1/4 inches in length using double thickness (see operation 9).					
2	Replacement of damaged parts - a. Replace at time of cutting any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats and stubs. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, cut, tear, burns or large exposed drill holes.					
3	Marking (see 3.11) - a. Mark or ticket all parts to insure a uniform shade and proper assembly throughout the garment.					
4	Attach label - a. Position label (1/2 inch tolerance) on the inside at the top of left back panel opening 2 ± 1/4 inches below snap fastener. The top edge of label may be caught in the facing stitching.	301	LSq-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE IV

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
5	Back panels.					
	a Turn in facings of left and right back panels, with the raw edges turned under, and stitch 1/16 to 1/8 inch from turned edge Facings shall finish 1/2 ± 1/8 inch in width	301	EFb-1	10-14	50-3	50-3
	b Join right back and right center panel to form one panel, with double-lapped, double-stitched seams Seam may lap in either direction	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2
6	Make fronts					
	a Join top front (basic fabric - 3 1 1) and middle front (barrier fabric - 3 1 2) with double-lapped, double-stitched seams Seams may lap in either direction	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2
	Make and join sleeves and close sides.					
	a Join upper sleeve to front and back armhole with double-lapped, double-stitched seams Seams may lap in either direction	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2
	b Seam side and sleeve underarm with double-lapped double-stitched seams Seams may lap in either direction	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2
	c Join bottom sleeve to upper sleeve	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2
	d Close overarm from top of neck to end of sleeve, with double-lapped, double-stitched seams Seams may lap in either direction	301 or 401	LSc-2	10-14	50-3	50-3
			LSc-2	10-14	50-3	70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE IV

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
8	Make and attach neck binding					
	a Fold neck binding in half lengthwise, turn in raw edge, and stitch to top of gown catching body of gown and facing. Collar ends shall be turned back 5/8 ± 1/8 inches and bartack Collar shall finish 3/8 ± 1/8 inches wide	301 or 401	BSc-1	10-14	50-3	50-3
		401	BSc-1	10-14	50-3	70-2
		Bartack	-	28 per tack	50-3	50-3
9	Make and attach cuffs					
	a Fold double layer of stockinet fabric to form a cuff					
	b Attach cuffs to underside of sleeve Cuff shall finish 4 ± 1/4 inches in length	602 or 502 or 503 or 504	SSa-2	8-12	70-2	70-2
		502 or 503 or 504	SSa-1	8-12	70-2	70-2
10.	Hem bottom of gown					
	a Turn up bottom of gown turning in raw edge, forming a 1/2 ± 1/8 hem Ends of stitching shall be backstitched or tacked	301	EFb-1	10-14	50-3	50-3
11.	Attach snap fasteners					
	a Number of sockets and studs are marked on pattern					
	b Attach sockets as indicated by marks on pattern					
	c Attach studs to correspond with sockets to effect a smooth closure					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

TABLE IV

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	d All sockets or studs not attached to facing shall be reinforced with component pieces cut from the base fabric The raw edges shall be turned under and caught in the double needle seams wherever possible When not caught in double needle seams, the raw edges shall be turned under and single needle stitched 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50-3	50-3
	e The three studs located at the left front (hip area) of the barrier fabric shall be reinforced with a strip of natural color cotton tape					
	f A 10 ± 1/8 inch strip of the tape, 3/4 ± 1/8 inch wide, shall be folded in half to form a 5 ± 1/4 inch reinforcement tape for the 3 studs, and single needle stitched to the barrier fabric Tape ends shall be turned under and caught in the double needle seam used in joining the left back panel and the middle front panel	301	SSaa-1	10-14	50-3	50-3
12	Clean gown					
	a Remove all spots, stains and shade tickets					
	b Trim all thread ends and remove loose threads					
13	Folding					
	a Gown shall be folded for packaging					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

3.11 Measurements.- The finished gowns shall conform to the measurements shown in table V All measurements and tolerances are expressed in inches.

Table V

Measurement	Medium	Large	Extra Large	Tolerance
1/2 Chest 1/	28	30	32	±1
Sweep 2/	68	72	76	±2
Length 3/	50	50	50	±2
Sleeve inseam including cuff 4/	25	25-1/2	25-1/2	±1

1/ 1/2 Chest taken from side seam to side sear at the base of the armhole.

2/ Sweep taken along bottom edge of gown from left back edge to right back edge.

3/ Length taken along center of front from top of neck opening to bottom edge of gown

4/ Sleeve inseam taken along the underarm seam of sleeve from base of armhole to bottom edge of cuff.

3.12 Workmanship.- The finished gown shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements

4.1.1 Certificates of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certificate

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.1 1 Sampling for testing Unless otherwise specified in subsidiary specifications, testing shall be in accordance with table VI. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified The sample unit for testing each component shall be as follows:

Component	Lot expressed as	Sample unit for testing
Base fabric (3.1.1)	Yards	2 yards (full width)
Barrier fabric (3.1.2)	Yards	2 yards (full width)
Label (3.5)	Yards	1 yard (full width)

4.2.1.2 Test methods. The methods of testing specified in FED-STD-191, and as listed in table VI shall be followed. All test reports shall contain the individual values as well as the average result.

Table VI - Test Methods

Component	Characteristic	Requirement Paragraph	Test Method
Base fabric (3 1.1)	Cotton identification	3 1 1	1200 1/
	Weave	3.1.1	Visual 1/
	Weight	3.1.1	5041
	Nonfibrous materials	3.1 1	2611
	pH	3.1 1	2811
	Yarns ply	3 1.1	Visual 1/
	-Warp		
	-Filling		
	Breaking strength	3 1 1	5100
	-Warp		
	-Filling		
	Shrinkage	3.1.1	5550
	-Warp		
	-Filling		
	Yarns per inch	3 1.1	5050
	-Warp		
	-Filling		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Table VI - Test Methods (cont'd)

Component	Characteristic	Requirement Paragraph	Test Method
	Color	3.2	Visual
	Colorfastness to		
	-Light	3.2.2	5660
	-Laundering (3 cycles)	3.2.2	5610 2/
	-Perspiration	3.2.2	5680
	-Dry crocking	3.2.2	5651
	Labile sulfur	3.2	2020
Barrier fabric (3.1.2)	Cotton identification	3.1.2	1200 1/
	Weave	3.1.2	Visual 1/
	Weight	3.1.2	5041
	Nonfibrous materials	3.1.2	2611
	pH	3.1.2	2811
	Air permeability	3.1.2	5450
	Water repellency		
	-Spray rating	3.1.2	5526
	Yarn ply	3.1.2	Visual 1/
	-Warp		
	-Filling		
	Breaking strength	3.1.2	5100
	-Warp		
	-Filling		
	Shrinkage	3.1.2	5550
	-Warp		
	-Filling		
	Yarns per inch	3.1.2	5050
	-Warp		
	-Filling		
	Color	3.2	Visual
	Colorfastness to		
	-Light	3.2.2	5660
	-Laundering (3 cycles)	3.2.2	5610 2/
	-Perspiration	3.2.2	5680
	-Dry crocking	3.2.2	5651
	Labile sulfur	3.2	2020
Label	Cotton identification	3.5	1200 1/
	Weight (45 inch basis)	3.5	5041 1/
	Adhesion 3/	3.5	Manual 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ Only the stain on the cotton fiber of the color transfer cloth shall be evaluated. Test specimens shall be dried after each laundering.

3/ One determination shall be made after 8 successive launderings using Method 5610. The test shall be made using the specified label material (3.5) and the base fabric (3.1.1).

4.2.1.3 Lot and sample size. The lot and sample size shall be as listed in table VII.

Table VII - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.2.2 Examination of the end item.- The classification of defects found during the examination shall be in accordance with defects listed in 4.2.2.2 through 4.2.2.4. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.3. The sample unit shall be one gown.

4.2.2.1 Classification of defects - All visual defects shall be classified as indicated below

4.2.2.2 General defects -

Defect	Classification Major	Classification Minor
Material defects and damages		
a. Hole, needle chew, scissor or knife cut, tear or mend	X	
b. Any weakening defect such as smash multiple float or loose slub.	X	
c. Stockinet·		
1. Holes, runs or dropped stitches	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Defect (cont'd)	Classification Major	Minor
Shaded parts		
a. Any outside part shaded.		X
Cleanness		
a. Spot or stain on outside		X
b. Thread ends not trimmed or loose thread not removed		X
c. Two or more shade or size markings not removed.		X
Component and assembly		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
Cutting		
a. Any component part not cut in conformance with directional lines on pattern		X
b. Any component part not as specified	X	
Seams and stitching		
a. General		
1. Any part of gown caught in an unrelated operation	X	
2. Seams twisted, puckered or pleated (unless otherwise classified herein)		X
3 Ends of all stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X
4 Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break		X
5. Continuous line of stitching overlapped less than 1/2 inch		X
b. Gage of stitching.		
1. Unevenly gaged or various stitching not uniform.		X
2. Beyond width specified or varies more than 1/16 inch when no range is specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seams and Stitching (cont'd)		
c. Open seams:		
- up to 1/4 inch inclusive		X
- over 1/4 inch	X	
NOTE: One or more broken or two or more continuous skipped or runoff stitches are considered an open seam. Double-stitched seams are considered open when either one or both sides of seams are open.		
d. Raw edges		
1. On outside.		
- more than 1/4 inch, but not more than 3/4 inch		X
- more than 3/4 inch.	X	
2 On inside.		
- 3/4 inch to 1 inch inclusive		X
- more than 1 inch.	X	
NOTE Raw edges not securely caught in stitching shall be classified as open seams		
e. Run-offs (see classification of oper seams)		
f Seam and stitch types		
1 Not specified seam or stitch type	X	
2 Looper thread (when stitch type 401 is used) on outside		X
g. Stitch tension		
1 Loose tension or edge or raised stitching, resulting in exposure of bobbin or top thread.		X
2. Loose tension, resulting in a loose seam.	X	
3 Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
NOTE Puckering is evidence of tight tension When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seams and stitching (cont'd)		
h. Stitches per inch		
1. Less than minimum specified by:		
- one or two stitches		X
- three or more stitches.	X	
2. More than maximum specified.		X
i Stitches skipped or broken.		
1. Less than 1/2 inch at two or more places.		X
2. On all other stitchings: see "Open seams"		

4.2.2.3 Detailed defects applicable to specific parts.-

Defect	Classification Major	Minor
Collar		
a Collar tight at neck, causing excessive puckers or pleats on front or back.	X	
b. Width - less than 1/4 inch or more than 1/2 inch		X
c. Uneven in width by more than 1/8 inch		X
d Twisted or excessively full in width	X	
Front and back panels		
1 Facing twisted or puckered affecting appearance or serviceability	X	
2 Omitted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Sleeves		
a Construction and setting		
1. Puckered or pleated at joining seams		X
2 Sleeves twisted.	X	
b Stockinet cuffs		
1. Less than 3-3/4 inches or more than 4-1/4 inches in length.		X
2. Twisted, affecting appearance.		X
3. Not of double thickness		X
Bottom hem		
a Hem width less than 3/8 inch or more than 5/8 inches in width		X
Label		
a Label		
1 Missing, incorrect, or illegible	X	
2 Not stitched on all four sides (when applicable)		X
3. Colors not as specified for specific size.	X	
4. Not securely attached.		X
5 Incorrectly positioned		X

4.2.2.4 Size measurements (see 3.11) - Any measurement deviating from dimensions and tolerances specified in table V shall be scored as a size measurement defect. Sleeve inseams uneven in length by more than 1/2 inch shall be scored as a size measurement defect.

4.2.3 Inspection levels and acceptable quality levels - Inspection levels and acceptable quality levels (AQL expressed in defects per 100 units (DHU) shall be as follows:

	AQL	Inspection level
4.2.2.2, 4.2.2.3 (combined)		II
Major	2.5	
Total	10.0	
4.2.3.4		S-2
One class	4.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking comply with requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery The lot size shall be the number of shipping containers in the end item inspection lot. The sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling Bulged or distorted container
Content	Number of packages per shipping container is more or less than required Number of gowns per package is more or less than required. Size shown on one or more gowns not as specified on package.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2)

5.1.1 Unit of issue One package containing twelve gowns, as specified, constitutes one unit of issue

5.1.2 Packaging quantities The number of units of issue indicated in table VIII shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document

Table VIII Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	2 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination

5.1 3 Level A.

5.1 3 1 Unit package. Each gown shall be neatly folded to an approximate dimension of 14 inches in length and 12 inches in width Twelve folded gowns of the same size shall be packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic Closure of the box adequate to prevent spilling of contents under normal handling

5.1 4 Level C Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose

5.2 Packing

5 2 1 Level A

5 2 1 1 Exterior container Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585 class 3, style 3 PPP-B-601 overseas type PPP-B-621, class 2, or PPP-B-636, class weather-resistant Fiberboard boxes shall conform to the special requirements specified in Table II of PPP-B-636

5 2 1 2 Case liner Each wood box shall be lined with a waterproof case liner conforming to MIL-L-10547 Closure and sealing shall conform to applicable paragraph of appendix thereto.

5 2 1 3 Closure Closure of each wood box shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix and waterproofed in accordance with paragraph 30 4 of PPP-B-636

5 2.1 4 Strapping Strapping, when required shall be in accordance with appendix of applicable box specification

NOTE Strapping shall not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3, PPP-B-601, domestic type, PPP-B-621, class 1, or PPP-B-636, class domestic. Fiberboard boxes shall conform to the special requirements specified in Table I of PPP-B-636. Closure of wood boxes shall be as specified in the appendix of the applicable box specification. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size, and name of contractor shall be shown When the contractor is not the manufacturer, the name of the manufacturer shall also be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

NOTE. The National Stock Number shall be shown in lieu of the Federal Stock Number wherever specified in MIL-STD-129.

5.3.3 Labels, mixed sizes - Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6 NOTES

6.1 Intended use The gown, is intended for wear by surgical personnel of the Medical Services

6.2 Ordering data - Procurement documents should specify the following

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

6.3 This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the items, which are normally procured to meet military requirements.

6.4 This specification is intended to cover the following items appearing in the Federal Supply Catalog

NATIONAL STOCK NO	ITEM IDENTIFICATION
6532-00-083-6534	GOWN, OPERATING, SURGICAL, Green, Medium, 12s.
6532-00-083-6535	GOWN, OPERATING SURGICAL, Green, Large, 12s
6532-00-083-6536	GOWN, OPERATING, SURGICAL, Green, Extra-Large, 12s

Custodians
Army - MD
Navy - MS
Air Force - 03

Review activities
Army - MD
Navy - MS
Air Force - 03

Preparing activity
Defense Supply Agency - DM

Project No. 6532-1067

Review information is current as of the date of this document For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

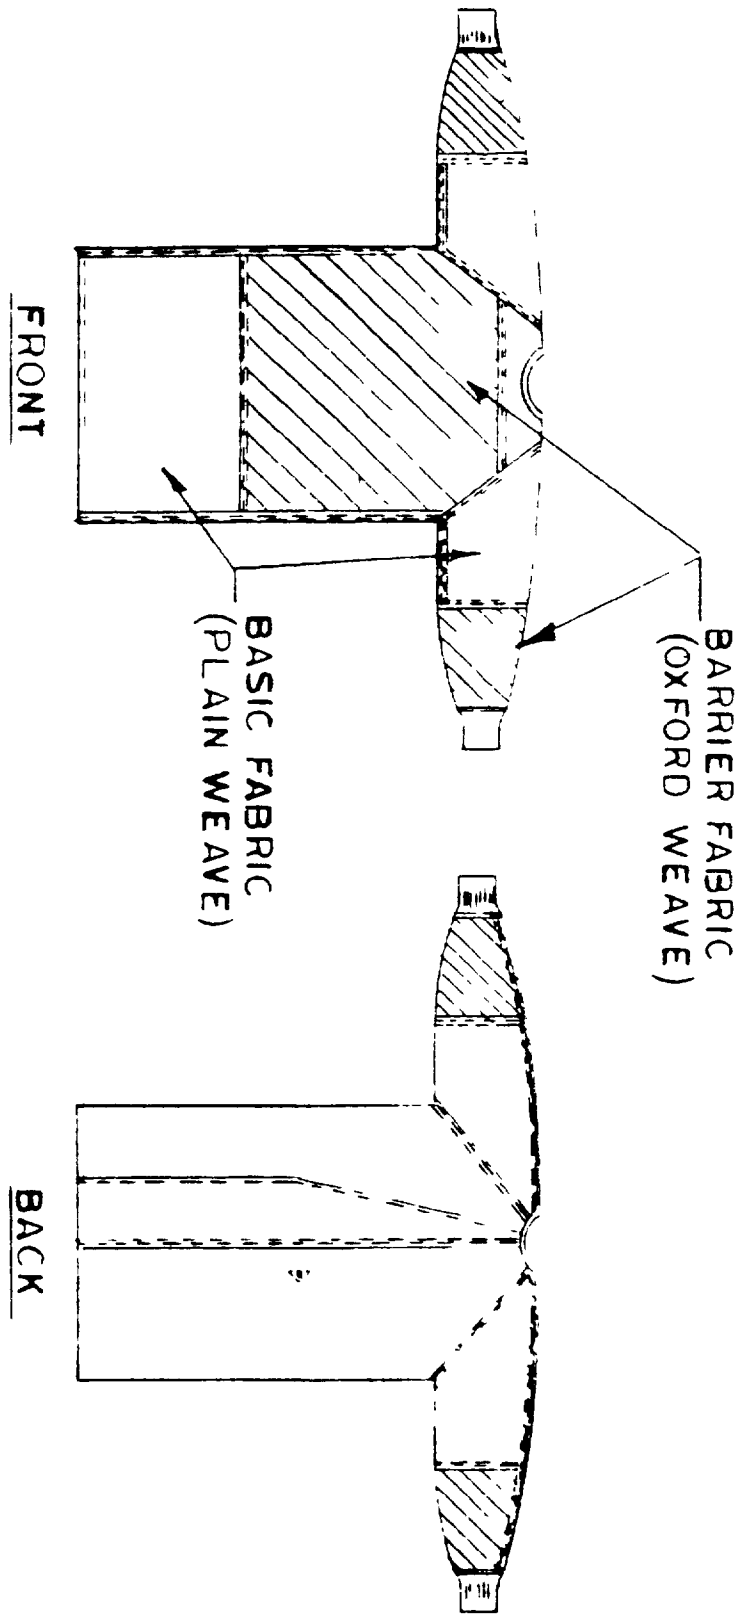


FIGURE 1
GOWN, OPERATING, SURGICAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors, government activities or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-G-36972

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO (If "Yes" in what way?

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa 19101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD 304



HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:41Z
Check the source to verify that this is the current version before use.