MIL-H-36992
15 August 1973

MILITARY SPECIFICATION

HOOK, DURA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers dura hooks suitable for lifting the dura in surgical procedures on the brain.

1.2 Classification. Dura hooks shall be furnished in the following types, as indicated below (see 6.1).

Types

I - Adson, 8 inch
II - Frazier, 5 inch

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

| | |
|---|---|
| GG-I-526 | Instruments, Dental and Surgical; General Specifications. |
| PPP-B-566 | Boxes, Folding, Paperboard. |
| PPP-B-585 | Box, Wood, Wirebound. |
| PPP-B-601 | Box, Wood, Cleated-plywood. |
| PPP-B-621 | Box, Wood, Nailed and Lock-corner. |
| PPP-B-636 | Box, Fiberboard. |
| PPP-B-676 | Box, Set-up. |

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Military

| | |
|---|---|
| MIL-P-116 | Preservation, Methods |
| MIL-L-10547 | Liners, Case and Sheet, Overwrap; Water-Vaporproof or Waterproof. |

STANDARDS

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | Marking for Shipment and Storage. |

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. The dura hook shall be in accordance with the applicable requirements of GG-I-526, and the following option exercises under that specification.

3.2 Material. Shall be fabricated from Class 4, Type 420 material.

3.3 Hardness. After proper stress relieving, material shall have Rockwell hardness of C-40 to C-45. As an alternate, handle for Type II hook need not be hardened.


3.4 Style, design, and dimensions. Type I hook shall be a sharp dura hook, Adson design, solid or hollow handle, suitable for picking up the dura. Type II hook shall be a dura hook, Frazier design, solid or hollow handle, suitable for attachment to, and elevation of human dura in neurosurgical procedures. Both shall be of one or two-piece construction. Shall be in accordance with Figure 1.

3.5 Finish. Hooks and shanks of instruments shall be mirror finish; handles shall be satin finish.


3.6 Identification marking. Instruments of foreign manufacture shall also be marked "stainless".



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

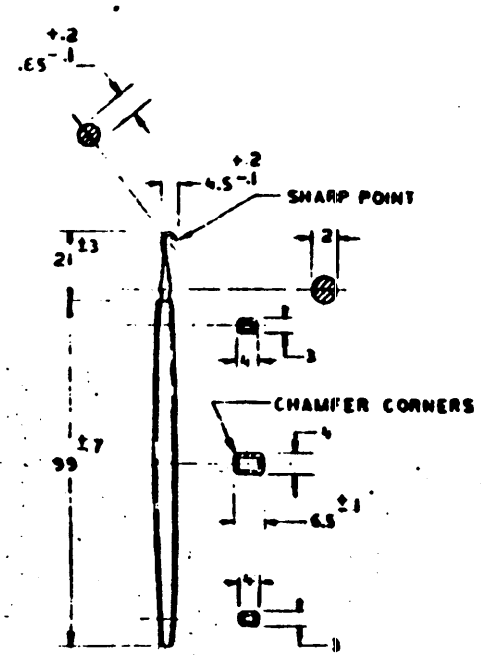


HOOK, DURA, FRAZIER
NSN 6515-00-342-2500

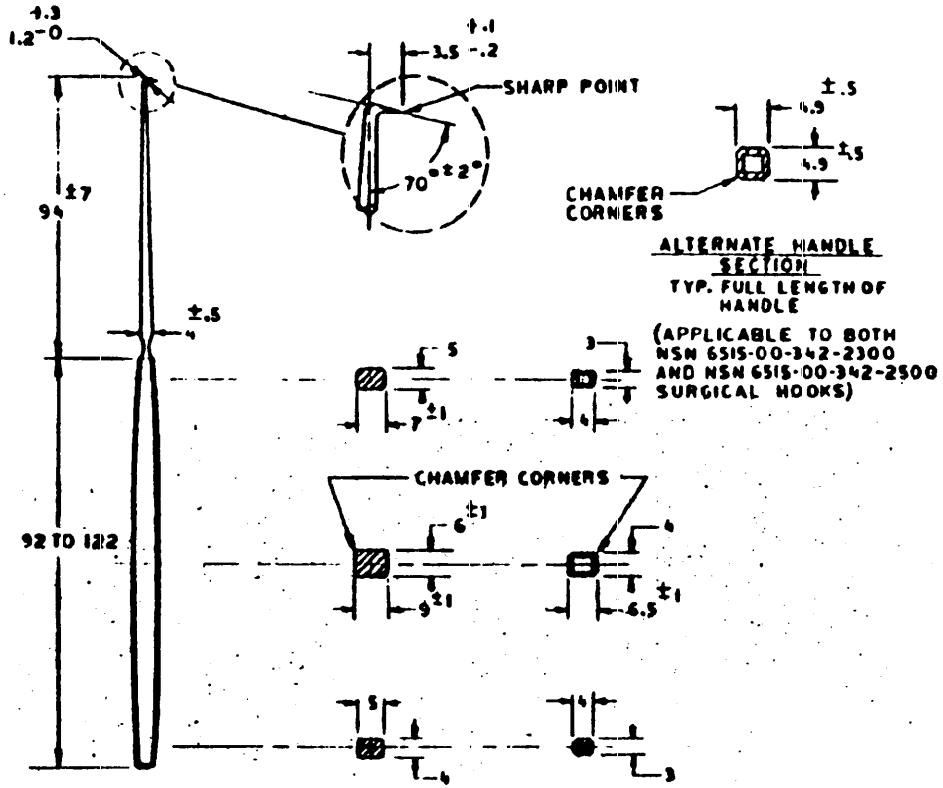


HOOK, DURA, ADSON, 6 INCH
NSN 6515-00-342-2300

ALTERNATE HANDLE SECTIONS

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS FOLLOWS: ALL DIMENSIONS UP TO 5 MM. ±.5 MM.
2. TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY, AND FIRST QUALITY WORKMANSHIP.

HOOKS, SURGICAL
FIGURE 1

MIL-H-36992

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the stainless steel, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in Table I. The unit of product for examination purposes shall be one hook.

Table I. Sampling Criteria for Examination

| Type of defect | Inspection level | AQL (percent defective) |
|---|---|---|
| Major | II | 1.0 |
| Minor | II | 2.5 |

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in Table II. Unit of product for test purposes shall be one hook.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Table II. Sampling Criteria for Tests

| Component | Characteristic (as applicable) | Reqmt | Test procedure | Unit of product | Insp level | AQL (percent defective) |
|---|---|---|---|---|---|---|
| Hook | Composition analysis | 3.2 & GG-I-526 | GG-I-526 | 1-hook | ** | |
| | Hardness | 3.? & GG- -526 | GG-I-526 | 1-hook | S-2 | * |
| | Copper sulfate test | GG-I-526 | GG-I-526 | 1-hook | S-2 | * |
| | Salt-spray test | GG-I-526 | GG-I-526 | 1-hook | S-2 | * |
| | Boil test | GG-I-526 | GG-I-526 | 1-hook | S-2 | * |

* Acceptance number shall be zero for all sample sizes.
** Four ounces of each lot of metal used in construction of the hook shall be selected for chemical analysis.

4.2.3 Sample unit usage. Where feasible, the same sample unit shall be used for determination of two or more test characteristics.

4.3 Examination. The hooks shall be examined to determine compliance with all the requirements contained in this specification. Examination shall be conducted as specified in Tables I and III. Inspection, however, shall not be restricted to defects listed in Table III. Any hooks in the sample containing one or more defects shall be rejected and if the number of defective items in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Table III. Classification of Defects

| Categories | |
|---|---|
| Critical | None defined |
| Major | |
| 101 | Style and design not as specified. |
| 102 | Hook not free from cracks, pits, burrs, sharp edges, and tool marks. |
| 103 | Finish not as specified. |
| Minor | |
| 201 | Identification marking not present, correct, complete or legible. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Unit of issue. One hook, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

| Unit package | Intermediate package | Exterior container |
|---|---|---|
| 1 unit | 6 units | 288 units |

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Preservative shall not be applied.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method 1C-2. The unit package shall contain sufficient cushioning material to immobilize the unit to prevent protrusion of the package or damage to the hook.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

5.1.3.5 Intermediate package. Intermediate package shall be a box of appropriate size constructed in accordance with PPP-B-566, PPP-B-676 or PPP-B-636, class domestic. Commercial colors are acceptable on intermediate cartons and closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof in accordance with paragraph 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The dura hooks are intended for use in neurosurgery.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and the procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2)
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification is intended to cover the following items appearing in the Federal Supply Catalog:

| National Stock No. | Item Identification |
|---|---|
| 6515-00-342-2300 | HOOK, DURA, Adson, 8 inch |
| 6515-00-342-2500 | HOOK, DURA, Frazier, 5 inch |

It does not include all types or sizes as indicated by the title nor all types which are commercially available.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

6.4 Supersession data. This specification includes requirements of Defense Medical Purchase Description No. 13, dated 6 January 1971 for HOOK.

Custodians:

Army - MD
Navy - MS
Air Force - 03

Review activities:

Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1753

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U S GOVERNMENT PRINTING OFFICE 1972—714-863/3404 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID




OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Defense Personnel Support Center
ATTN: DPSC-N
2800 South 20th Street
Philadelphia, Pennsylvania 19101
ATTN: DPSC-ATTS

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:43Z
Check the source to verify that this is the current version before use.