
MILITARY SPECIFICATION SHEET

DECORATION, MEDAL OF VALOR, CHAPLAIN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-D-3943.

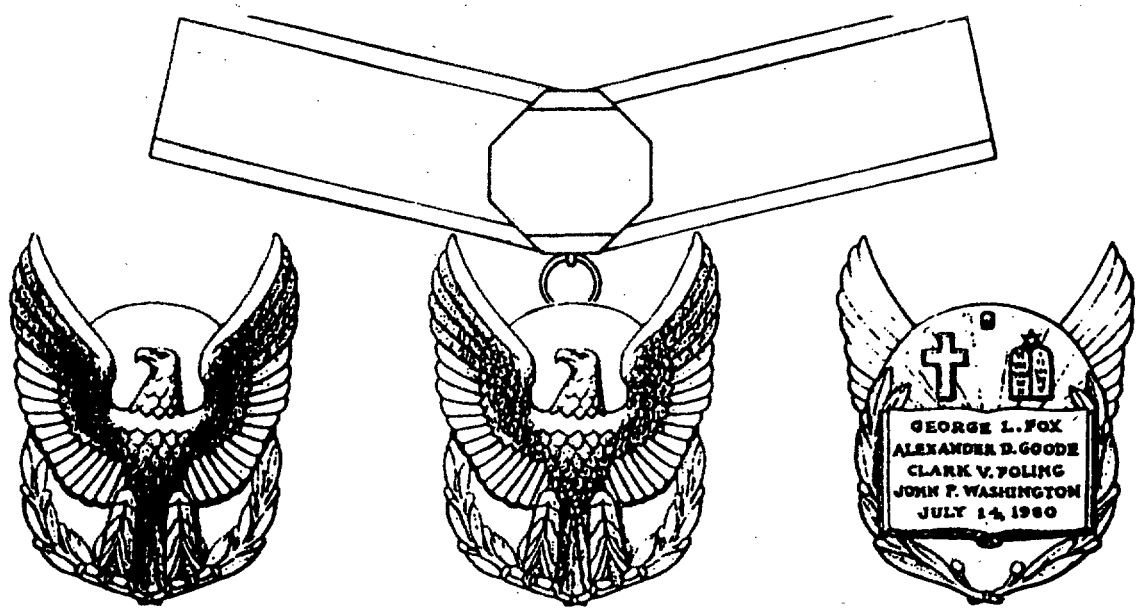

OBVERSE ASSEMBLED REVERSE

MATERIAL: RED BRASS
DIMENSIONS PENDANT (INCHES):
HEIGHT (OVERALL): 2-5/8 (REF)
WIDTH (OVERALL): 2-1/16 (REF)
THICKNESS (AT EAGLES BREAST): .250 ± .010

FINISH: ROSE GOLD, GOLD PLATED, MATTE FINISH, HIGHLIGHTS, RELIEVED

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. A LUG SHALL BE FORMED ON THE REVERSE OF THE PENDANT IN A HALF CIRCLE. THE LUG SHALL BE 1/4 INCH IN DIAMETER AND SHALL BE FORMED FROM 0.050 INCH BRASS WIRE. THE LUG SHALL BE LOCATED ON THE VERTICAL CENTERLINE OF THE PENDANT 3/16 ± 1/16 BELOW THE TOP EDGE. THE LUG SHALL BE SOLDERED IN PLACE.

2. THE SUSPENSION RING SHALL BE FORMED FOR .050 DIAMETER BRASS WIRE AND SHALL BE 1/2 ± 1/8 INCH IN DIAMETER. THE SUSPENSION RING SHALL BE FINISHED TO MATCH THE PENDANT.

3. THE NECKRIBBON SHALL BE FABRICATED AS SHOWN ON FIGURE 5 OF MIL-D-3943C, EXCEPT THE SHIELD SHALL BE A 1-1/4, +0, -1/8 INCH SQUARE WITH THE CORNERS TRIMMED 1/4 INCH.

4. THE ASSEMBLED DECORATION SHALL BE MOUNTED IN A PRESENTATION CASE CONFORMING TO TYPE VIII WITH A TYPE I, CLASS 1 PAD.

5. THE RIBBON FOR THE PENDANT DRAPE AND SERVICE RIBBON SHALL CONFORM TO MIL-R-11589/303.

Custodian:
Army - IH

Review activity:
Other - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:51Z
Check the source to verify that this is the current version before use.