NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/117B
1 May 1997
SUPERSEDING
MIL-D-3943/117A
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, SURGEON GENERAL'S MEDALLION, U.S. PUBLIC HEALTH SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

OBVERSE REVERSE

MATERIAL: Red Brass

FINISH: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

DIMENSIONS:
HEIGHT (Including Lug): 1-9/16 inch (3.97 cm) (REF)
DIAMETER: 1-3/8 inch (3.49 cm) (REF)
THICKNESS (At Thickest Point): 0.155 inch ± 0.010 inch (0.394 cm ± 0.025 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pendant ribbon ring shall be fabricated for 0.064 inch (0.163 cm) diameter wire and shall have an inside diameter of 3/8 inch (0.95 cm). The ends shall be square cut and shall be together and in line.

3. The neck ribbon shall be formed by one piece of ribbon, 1-3/8 inch (3.49 cm) wide and 31 inches (78.74 cm)long, seamed to form a loop. The seam shall be formed as shown below and shall have a 1/2 inch (1.27 cm) turn under at each end. The seam shall be stitched by machine with ultramarine blue thread closely matching the blue of the ribbon. All loose ends of thread shall be trimmed.

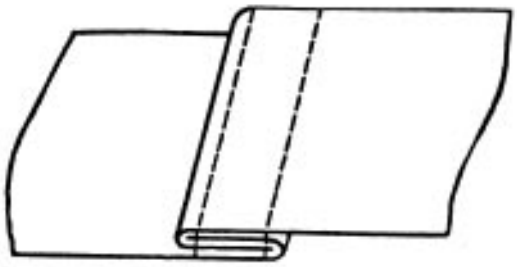

4. A hole 3/16 inch (0.48 cm) in diameter shall be drilled through the lug, perpendicular to the obverse and reverse faces of the pendant. The hole shall be centered in the lug.

5. The reverse side of this decoration shall be the same as the obverse of Decoration MIL-DTL-3943/101 USPHS Award.

6. Decoration set shall consist of a regular size medal packaged in a presentation case conforming to MIL-DTL-14633, Type XV, Style 1 with a Type I, Class 1 pad.

7. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/315.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:52Z
Check the source to verify that this is the current version before use.