NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/120C
1 May 1997
SUPERSEDING
MIL-D-3943/120B
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, MERCHANT MARINE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

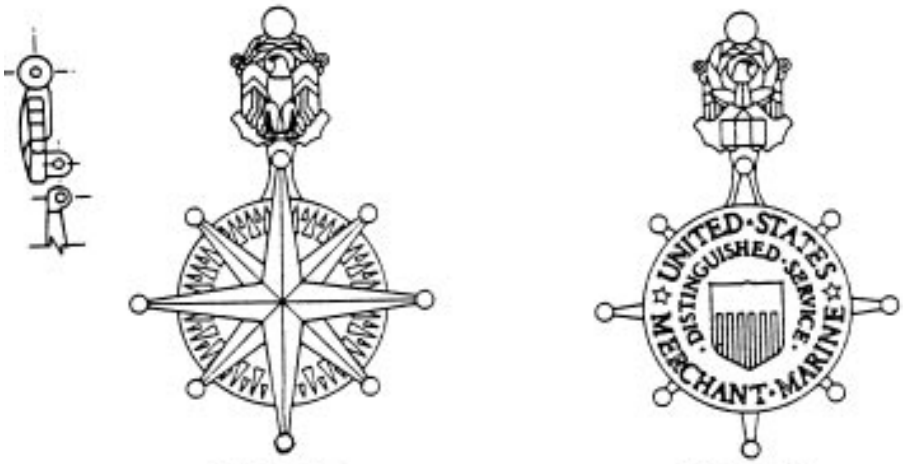

OBVERSE REVERSE

MATERIAL: Red Brass

FINISH:

PENDANT:

OBVERSE: Nickel Plated, Silver Plated, Gold Plated, Matte Finish. The Compass Rose shall be Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12. The remainder shall be Gold Plated Matte Finish and shall match TIOH Metal Finish Number 7.

REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

SUSPENSION (Device): Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
  PENDANT:
    HEIGHT (Overall): 1-7/8 inches (4.76 cm) (REF)
    WIDTH (Overall): 1-11/16 inches (4.29 cm) (REF)
    THICKNESS (At Thickest Point): 0.265 inch ± 0.010 inch (0.673 cm ± 0.025 cm)

  SUSPENSION (DEVICE):
    HEIGHT (Overall): 13/16 inch (2.06 cm) (REF)
    WIDTH (Overall): 37/64 inch (1.47 cm) (REF)
    THICKNESS (At Thickest Point Excluding Lug): 0.185 inch ± 0.010 inch (0.470 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The suspension device shall be secured to the pendant by a hinge and pin joint. The hinge shall be hard soldered to the vertical center line of the suspension device in the location shown.

3. Pierced areas shall be as indicated.

4. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XV, Style 1 with a Class 1 pad.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/326.

6. The lapel button shall conform to MIL-DTL-11484/155.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
  Army - IH

Preparing activity:
  Army - IH

Review activities:
  DLA - CT

(Project No. 8455-0887)

Civil Agency Coordinating Activities:
  DOT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:53Z
Check the source to verify that this is the current version before use.