NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/120G(IH)
21 December 2023
SUPERSEDING
MIL-DTL-3943/120F(IH)
19 February 2019

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, MERCHANT MARINE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943.

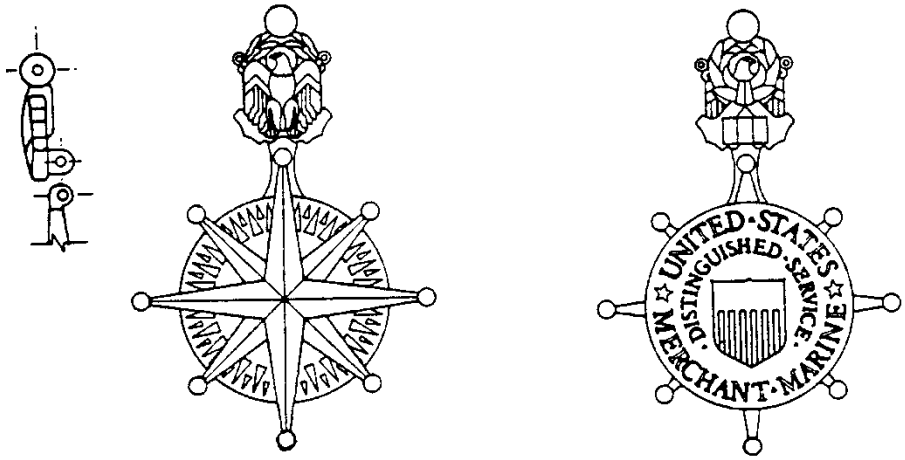

OBVERSE REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
PENDANT:
OBVERSE: Nickel Plated, Silver Plated, Gold Plated, Matte Finish. The Compass Rose shall be Silver Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Standard Metal Finish Chip Number 12. The remainder shall be Gold Plated Matte Finish and shall match TIOH Metal Finish Number 7.
REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Standard Metal Finish Chip Number 8.
SUSPENSION (Device): Gold Plated, Matte Finish and shall match TIOH Standard Metal Finish Chip Number 7.

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 1-7/8 inches (REF)
WIDTH (Overall): 1-11/16 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:53Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point): 0.265 inch ± 0.010 inch
SUSPENSION (DEVICE):
HEIGHT (Overall): 13/16 inch (REF)
WIDTH (Overall): 37/64 inch (REF)
THICKNESS (At thickest point excluding lug): 0.185 inch ± 0.010 inch

DECORATION SET AND CASE: Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type I, Style 1 with a Class 1 pad

SUSPENSION DEVICE:

1. The suspension device shall be secured to the pendant by a hinge and pin joint.

2. The hinge shall be hard soldered to the vertical center line of the suspension device in the location shown.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/326.

4. The specification slash sheet for the lapel button is MIL-DTL-11484/155.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-027)

Civil Agency Coordinating Activity:
DOT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:53Z
Check the source to verify that this is the current version before use.