This document has been approved for public release and sale; its distribution is unlimited.

MIL-C-24404(SHIPS)
1 September 1971
(See 6.5)

MILITARY SPECIFICATION

CONNECTION BOXES, 15 FEET SUBMERSIBLE, FOR DEGAUSSING CABLES

(NAVAL SHIPBOARD USE) GENERAL SPECIFICATION FOR

1. SCOPE

1.1 Scope. This specification covers the requirements for watertight connection boxes for degaussing cables for use on Naval ships.

1.2 Classification. Connection boxes shall be of the watertight type and of the sizes as specified in table I and in the individual detail specification sheet (see 6.2). Symbol numbers refer to the complete connection box assembly.

Table I - Connection box sizes.

Symbol number	Connection box size (terminal)	For C.M. wire sizes
477.1	20	6,500 to 13,090
477.2	20	14,000 to 60,090
478.2	40	6,500 to 13,090
478.3	40	14,000 to 60,090
478.4	10	75,000 to 200,000
479.1	60	6,500 to 13,090
479.2	60	14,000 to 60,090
480.3	80	6,500 to 13,090
480.4	80	14,000 to 60,090
480.5	18	75,000 to 350,000
480.6	20	75,000 to 200,000
480.7	12	157,000 to 413,000

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-698 - Steel, Sheet and Strip, Low-Carbon.
TT-E-489 - Enamel, Alkyd, Gloss (For Exterior and Interior Surfaces).

MILITARY

MIL-R-900 - Rubber Gasket Material, 45 Durometer Hardness, For Moderately Low Temperature Service.
MIL-S-901 - Shock Tests, H. I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements For.
MIL-E-917 - Electric Power Equipment, Basic Requirements (Naval Shipboard Use).
MIL-P-15024 - Plates, Tags and Bands for Identification of Equipment.
MIL-P-15024/5 - Plates, Identification.
MIL-P-15037 - Plastic Sheet, Laminated, Thermosetting, Glass-Cloth, Melamine-Resin.
MIL-I-45208 - Inspection System Requirements.

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:50Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-108 - Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment.
MIL-STD-167 - Mechanical Vibrations of Shipboard Equipment.
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-278 - Fabrication Welding and Inspection; and Casting Inspection and Repair for Machinery, Piping and Pressure Vessels in Ships of the United States Navy.

See Supplement-1 for list of applicable specification sheets.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)
No. 70 - National Electric Code.

(Application for copies should be addressed to National Fire Protection Association, 60 Batterymarch Street, Boston, Massachusetts 02110.)

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
B21 - Naval Brass Rod, Bar, and Shapes.
B98 - Copper-Silicon Alloy Rod, Bar and Shapes.
B140 - Leaded Red Brass (Hardware Bronze) Rod, Bar, and Shapes.
B159 - Phosphor Bronze Wire.

(Application for copies should be addressed to the American Society for Testing and Materials, 916 Race Street, Philadelphia, Pa. 19103.)

AMERICAN IRON AND STEEL INSTIUTUE (AISI)
Steel Products Manual.

(Application for copies should be addressed to the American Iron and Steel Institute, 350 Fifth Avenue, New York, N.Y. 10017.)

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article sample. Prior to beginning production a sample of each size under contract or order shall be inspected as specified in 4.2 (see 6.4).

3.2 Detail specification sheets. The individual connection box requirements shall be as specified herein and in accordance with the applicable detail specification sheets. In the event of any conflict between requirements of this specification and the detail specification sheets, the latter shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials used in the manufacture of connection boxes shall be as specified herein or in the applicable detail specification sheet. When a definite material is not specified, the manufacturer shall use a good quality commercial grade material which is suitable for the intended use.

3.3.1 Metals.

3.3.1.1 Dissimilar metals. When dissimilar metals are used in intimate contact with each other, protection against electrolysis and corrosion shall be provided. Metal plating or metal spraying of dissimilar base metals to provide similar or suitable abutting surfaces are acceptable methods for the alleviation of electrolytic erosion. Before using any other method, a manufacturer shall obtain the approval of the procuring activity. Dissimilar metals are defined in MIL-E-917.

3.3.1.2 Enclosures. The enclosures shall be fabricated of low carbon steel conforming to QQ-S-698 (or alternate materials as approved by the Naval Ship Engineering Center (NAVSEC) or agency concerned for specific applications.)

3.3.2 Rubber compounds. Rubber compounds and compositions shall be in accordance with MIL-R-900.

3.3.3 Stud terminals. Stud terminals shall conform to the following:

(a) Body. Hardware bronze, hexagonal in accordance with ASTM B140, alloy 314, half hard.
(b) Nut. Silicon copper, hexagonal in accordance with ASTM B98, alloy 655 or 661 hard.
(c) Pressure bar. Naval brass in accordance with ASTM B21, alloy 464, hard.
(d) Pin. Corrosion resistant steel, AISI type 316.

3.4 Design and construction. The connection boxes shall conform to the design and construction specified on the detail specification sheets. No deviation in essential details, and materials specified herein and on the applicable detail specification sheet shall be permitted, unless approved by NAVSEC or the procuring agency.

3.4.1 Small miscellaneous hardware. All miscellaneous hardware, such as screws, bolts, nuts and washers shall be of a good commercial grade, suitably protected against corrosion. Self tapping screws or other self tapping devices shall not be used in the assembly of components. When specified on the applicable detail specification sheets the components shall be as shown on figures 1 through 15.

3.4.2 Threads. Threads shall be right hand class 2 in accordance with Handbook H28.

3.4.2.1 Engagement of threaded parts. All threaded parts shall engage sufficiently to enable the connection boxes and interior components to withstand the tests specified in 4.5.4 and 4.5.5, however the minimum engagement shall be three full threads.

3.4.3 Drilling, countersinking and tapping. Drilling, countersinking and tapping shall be done before plating or finish is applied.

3.4.4 Sharp edges. All sharp edges that are accessible shall be given a slight radius and made smooth.

3.4.5 Drain plug. A brass drain plug shall be installed at low point of connection boxes to permit drainage of any condensate which may collect.

3.4.6 Cover securing studs. Cover securing studs shall be welded or brazed to connection box as shown on individual detail specification sheets; one stud shall be installed in an unsymmetrical arrangement to provide for cover polarization.

3.4.7 Stud terminals. Stud terminals shall be as shown on figure 15 and on the individual detail specification sheet.

3.5 Watertight enclosures.

3.5.1 Gaskets. Gaskets shall be 1/2 inch square. Gaskets for enclosures with square corners shall be made in four pieces. Long dimension pieces shall be installed first and shall fit tightly throughout the groove and at the ends. Short dimension pieces shall then be fitted to butt tightly against the free ends of the long pieces. Gasket joints shall be made tight with rubber cement. Gaskets shall not be cemented along the grooves. Gaskets for connection boxes with optional round corners shall be made in one piece. Before shipment, gaskets shall be relieved of pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

3.5.2 Holes for stuffing tubes or box connectors. Holes shall be cut or drilled by the manufacturer only when so specified (see 6.2). These holes shall be smooth and true without any distortion of the connection box.

3.5.3 Stuffing tubes or box connectors shall be furnished only when so specified in the detail specification sheet. Cable entrance holes (stuffing tubes) shall be plugged, by the manufacturer of the enclosure by a suitable rubber plug and compressed by the gland or cap to provide a water-vaporproof seal.

3.5.4 Welding, brazing and similar processes. Welding, brazing and similar processes used in the manufacture of connection boxes shall be in accordance with MIL-STD-278.

3.5.4.1 All steel parts of connection box and cover shall be assembled by welding as specified herein or on detail specification sheets and shall be positioned by jig while welding to insure proper alignment.

3.5.4.2 All projection and spot welding shall be performed by machines having automatic control of current, timing, and pressure to insure proper uniformity of the operation.

3.6 Stress relief. All metals used in the manufacture and assembly shall be suitably treated or heat treated to prevent deterioration or failure due to stresses or other conditions resulting from working, forming, welding and similar processes, during the fabrication process.

3.6.1 The words "stress relieved" shall be on the outside bottom of each complete unit in 1/4 inch letters with ink of a grade similar or equal to Clear Print Opaque, manufactured by Phillips Process Co., Inc., Rochester, New York.

3.7 Electrical details.

3.7.1 Clearances and creepage. Minimum electrical creepage and clearances shall be as required by NFPA No. 70. These clearances are applicable to machined laminated plastic bases or components. Clearances applicable to molded bases or supports shall conform to the requirements of MIL-E-917 providing mold finishes are not disturbed.

3.7.2 Terminal strips. Terminal strip material shall be a glass cloth bonded with melamine resin type GME, in accordance with MIL-P-15037. No other laminated plastic material shall be used for electrical insulation.

3.8 Performance requirements.

3.8.1 Dielectric strength. Connection boxes shall withstand the dielectric strength test specified in 4.5.1.

3.8.2 Insulation resistance. Connection boxes shall withstand the insulation resistance test specified in 4.5.2.

3.8.3 Temperature rise. Connection boxes shall withstand the temperature rise test specified in 4.5.3.

3.8.3 Shock. Connection boxes shall withstand the shock test specified in 4.5.4.

3.8.5 Vibration. Connection boxes shall withstand the vibration test specified in 4.5.5.

3.8.6 Salt spray. Connection boxes shall withstand the salt spray test specified in 4.5.6.

3.8.7 Effectiveness of enclosure tightness. Connection boxes shall withstand the effectiveness of enclosure tightness inspection specified in 4.5.7.

3.9 Identification plates. Plates for identification shall be engraved in accordance with type B of MIL-P-15024 and MIL-P-15024/5. Material for these plates shall be brass.

3.10 Manufacturer's marking. Manufacturer's marking shall appear on the exterior of cover or identification plate. This marking shall be either initials or monogram, and shall be depressed or embossed in the metal to provide permanent identification. This identification shall be that of the prime manufacturer responsible for the final acceptance of the equipment. If the manufacturer makes only the enclosure, his identification marking shall be on the interior of the cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

3.11 Cleaning. Connection boxes shall be furnished thoroughly cleaned of all soldering flux and other corrosive agents. Cleaning agent shall be neutralized after cleaning. Cleaning shall be in accordance with MIL-E-917.

3.12 Painting. Painting shall be in accordance with MIL-E-917 except that the interior of the enclosure, excluding cover, shall be painted white using enamel in accordance with TT-E-489.

3.13 Drawings. Drawings shall consist of manufacturers' drawings, certified by the cognizant Defense Contract Administration Service Office (DCASO) as complying with the requirements of this specification. The certification shall be documented on the drawing as a matter of record. Drawings shall carry manufacturers' numbers and the number of this specification. (Formal approval and validating signatures for manufacturers' drawings will not be required nor will NAVSHIPS drawing numbers be assigned.)

3.13.1 Manufacturers' drawings shall be furnished and shall include the following:

(a) Outline, not necessarily to scale, of the front, side, cross sectional, and top views of the boxes, giving dimensions and other essential details. In the interest of clarity, views in addition to those required may be shown.
(b) List of material.
(c) Descriptive data of the equipment, which shall include the degree of enclosure.
(d) Weight of the equipment and mounting dimensions.
(e) A list of notes and references pertinent to the basic design of the equipment.
(f) A list of notes pertinent to the tests conducted in accordance with this specification.
(g) Title block.

3.13.2 Drawing distribution. The manufacturer, upon being advised that his first article sample has successfully passed the inspection of 4.2 and has been found satisfactory for use, shall immediately place on record a set of prints of the drawing used for manufacturing the parts with the following:

(a) One set for file with the DCAS.
(b) One set for file with NAVSEC, Department of the Navy, Hyattsville, Maryland 20782.
(c) One set for file with the Contracting Officer, Ships Parts Control Center, Mechanicsburg, Pennsylvania, 17055.
(d) One set for file with the Commander, Defense General Supply Center, Richmond, Virginia 23212.

3.14 Workmanship. Workmanship shall be first class in every respect.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection system. The supplier shall provide and maintain an inspection system acceptable to the Government for supplies and services covered by the specification. The inspection system shall be in accordance with MIL-I-45208 (see 6.2 and 6.3).

4.2 First article inspection. The first article shall be subjected to the examination specified in 4.4 and the tests shall be performed in the order listed in 4.5. The manufacturer is cautioned not to start production until a satisfactory report has been approved by NAVSEC. The first article shall not be offered for delivery.

4.3 Quality conformance inspection.

4.3.1 Lot. All connection boxes of identical design and size offered for delivery at one time under one contract shall be considered a lot for purposes of sampling and inspection.

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:50Z
Check the source to verify that this is the current version before use.

4.3.2 Sampling for quality conformance inspection. Sample connection boxes shall be selected at random from each lot in accordance with MIL-STD-105 at inspection level II for the examination and tests specified in 4.4 and 4.5.1 through 4.5.3 and 4.5.7. The acceptable quality level (A.Q.L.) shall be 1.5 percent defective. Any connection box in the sample containing one or more defects shall not be offered for delivery and if the number of defective units in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be cause for rejection.

4.4 Examination. The connection box shall be subjected to a surface examination to ascertain that the requirements of this specification and the applicable detail specification sheet concerning materials, design, construction, dimensions, marking and workmanship have been accomplished.

4.5 Tests.

4.5.1 Dielectric strength. An alternating current (a.c.) root mean square (rms) test voltage of 60 cycle frequency, equal to 1000 volts plus twice the rated voltage (2 X 250V) shall be applied between points of opposite polarity and also between live parts and ground. The test voltage shall be increased from zero at a rate not exceeding 500 volts per second until the specified potential is reached and shall be maintained at that value for 1 minute. The test voltage may be applied instantaneously for acceptance tests at the option of the manufacturer. For production testing, the manufacturer may elect to increase the dielectric test voltage by 20 percent and apply for 1 second, instead of the 1 minute time intervals required by the previous test. The source of test potential shall have a rating of, at least, 1 kilowatt.

4.5.2 Insulation resistance. Insulation resistance of connection box assemblies shall be measured with a 500 volt direct current (d.c.) megometer, between electrical conductors and ground at approximately room temperature 75°F. (25°C.) and at relative humidity of approximately 50 percent. Resistance shall be not less than 200 megohms.

4.5.3 Temperature rise. Each current carrying component shall carry the maximum rated current of the largest conductor size for which it is designed, with no parts showing a temperature rise in excess of 30°C. The test current shall be applied until a stable temperature is obtained; the temperature is considered stable when three successive readings, taken at 5 minute intervals, show no change. The temperature rise is the difference between the stable temperature and the average ambient temperature during the last quarter of the test. Temperature readings may be obtained by the thermocouples or by other standard methods.

4.5.4 Shock test. The connection boxes shall be subjected to the HI shock test as specified in MIL-S-901 for grade A, class I, type A equipment.

4.5.4.1 Definition of failure to perform principal functions shall be as follows:

(a) Breakage of any parts, including mounting bolts.
(b) Appreciable distortion of any parts.
(c) Failure to meet the test of 4.5.7 after completion of HI shock tests.

4.5.4.2 Place at which test shall be conducted. As specified (see 6.2), when shock tested at a Government laboratory, a copy of the applicable manufacturer's drawing shall accompany, or (preferably) precede, the equipment.

4.5.4.3 The number of connection boxes to be shock tested and disposal of shock tested connection boxes shall be as specified (see 6.2).

4.5.5 Vibration test. The equipment shall meet, without failure or disruption of service, the vibration test requirements of type I of MIL-STD-167.

4.5.6 Salt spray test. When specified (see 6.2), salt spray test shall be conducted in accordance with MIL-STD-202, method 101C.

4.5.7 Effectiveness of enclosure tightness. Examination and testing shall be conducted, to determine the effectiveness of enclosure tightness of the connection boxes, in accordance with MIL-STD-108.

4.6 Inspection of preparation for delivery. The packaging, packing and marking shall be inspected for compliance with section 5 of this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.6.)

5.1 Domestic shipment and early equipment installation (see 5.3.1).

5.1.1 Connection boxes.

5.1.1.1 Preservation and packaging. Preservation and packaging which may be the supplier's commercial practice, shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation.

5.1.1.2 Packing. Packing shall be accomplished in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules or other carrier regulations, as applicable to the mode of transportation and may conform to the supplier's commercial practice.

5.1.1.3 Marking. Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the supplier's commercial practice. The information shall include nomenclature, Federal stock number or manufacturer's part number, contract or order number, contractor's name and destination.

5.2 Domestic shipment and storage or overseas shipment. The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 5.3.2 and 6.2).

(5.2.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made.

5.2.2 Equipment destined for overseas shipment, or domestic shipment involving storage of 180 days or more shall be preserved, packaged, packed, and marked in accordance with preparation for delivery instructions included in the contract or order.

5.2.3 Preservation, packaging, packing, and marking. Boxes shall be preserved and packaged level A or C, packed level A or B, and marked in accordance with MIL-E-17555, as specified (see 6.2)).

5.3 Use of polystyrene (loose-fill) material.

5.3.1 For domestic shipment and early equipment installation and level C packaging and packing. Unless otherwise approved by the procuring activity (see 6.2), use of polystyrene (loose-fill) material for domestic shipment and early equipment installation and level C packaging and packing applications such as cushioning, filler and dunnage is prohibited. When approved, unit packages and containers (interior and exterior) shall be marked and labelled as follows:

"CAUTION

Contents cushioned etc with polystyrene (loose-fill) material.
Not to be taken aboard ship.
Remove and discard loose-fill material before shipboard storage.
If required, recushion with cellulosic material bound fiber,
fiberboard or transparent flexible cellular material."

5.3.2 For level A packaging and level A and B packing. Use of polystyrene (loose-fill) material is prohibited for level A packaging and level A and B packing applications such as cushioning, filler and dunnage.

6. NOTES

6.1 Intended use. The connection boxes covered by this specification are intended for use onboard Naval ships for degaussing cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification and applicable specification sheet.
(b) Size required (see 1.2).
(c) If holes for stuffing tubes or box connectors are to be cut or drilled (see 3.5.2).
(d) Quality assurance requirements (see 4.1.1).
(e) Place at which shock test will be conducted (see 4.5.4.2).
(f) Number of boxes to be shock tested and disposal of shock tested boxes (see 4.5.4.3).
(g) Whether salt spray test is required (see 4.5.6).
(h) Levels of preservation, packaging, packing, and marking requirements if other than as specified in 5.1 (see 5.2).
(i) When polystyrene "loose-fill" material is approved (see 5.3.1).
(j) Type and size of terminals.

6.3 Management control system document. The following management control system document should be included on DD Form 1660:

(a) MIL-I-45208 (see 4.1.1).

6.4 First article inspection. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.5 Supersession data. This specification supersedes Drawings 9000-S8106-73142, 9000-S8106-73143, 9000-S8106-73144 and 9000-S8106-73145.

6.6 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in Section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

Preparing activity:
Navy - SH
(Project 1075-N018)

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:50Z
Check the source to verify that this is the current version before use.

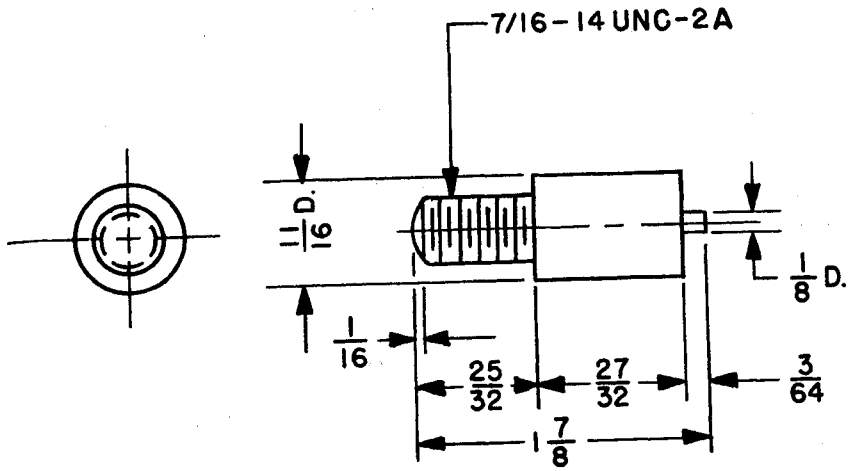


Figure 1 - Cover securing stud.


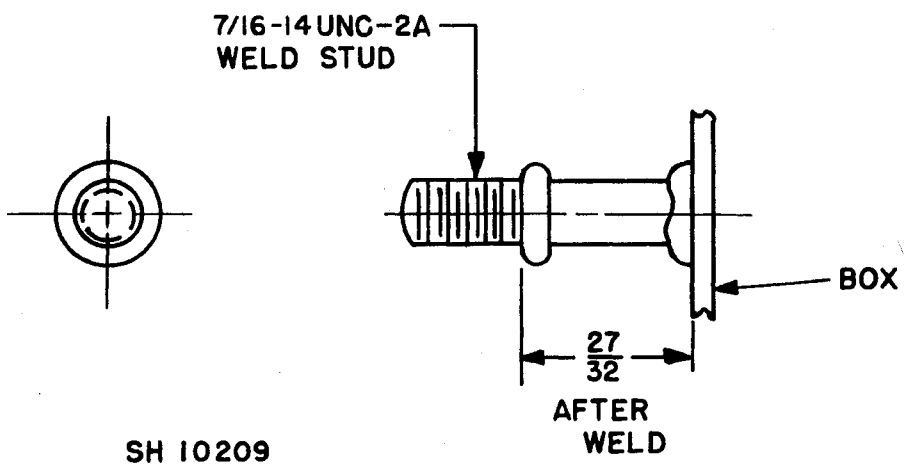



Figure 2 - Optional method for cover securing stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

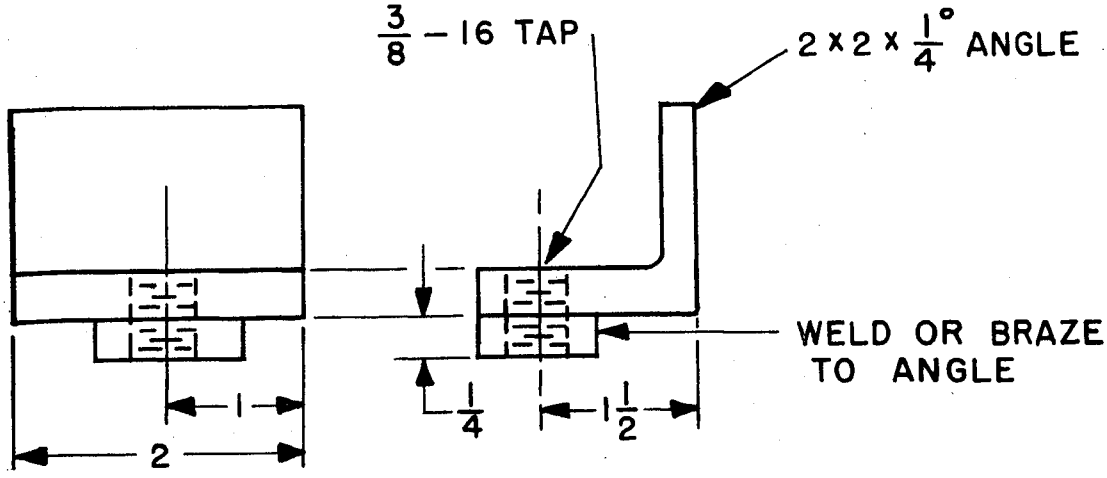

SH 10210


Figure 3 - Terminal strip mounting bracket.

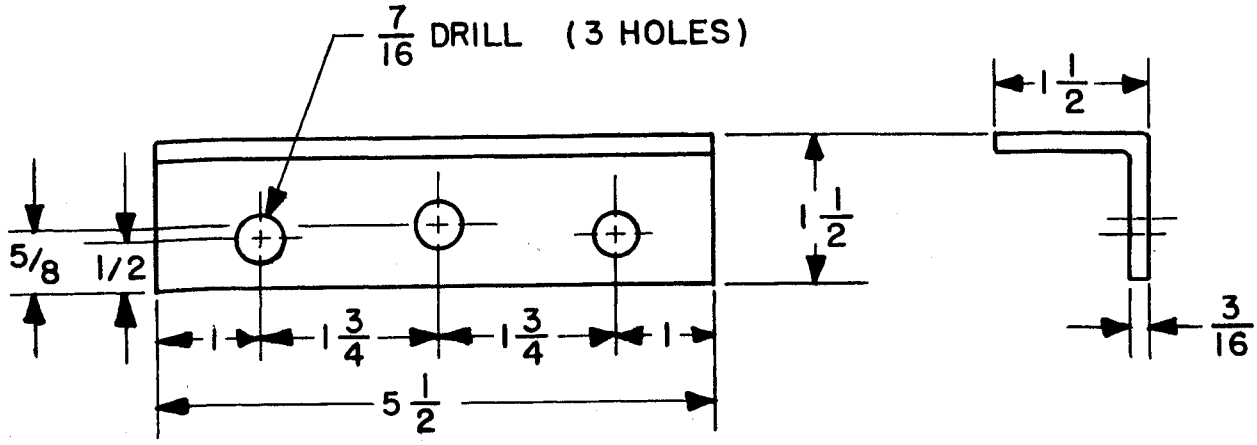

SH 10211


Figure 4 - Terminal strip mounting bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

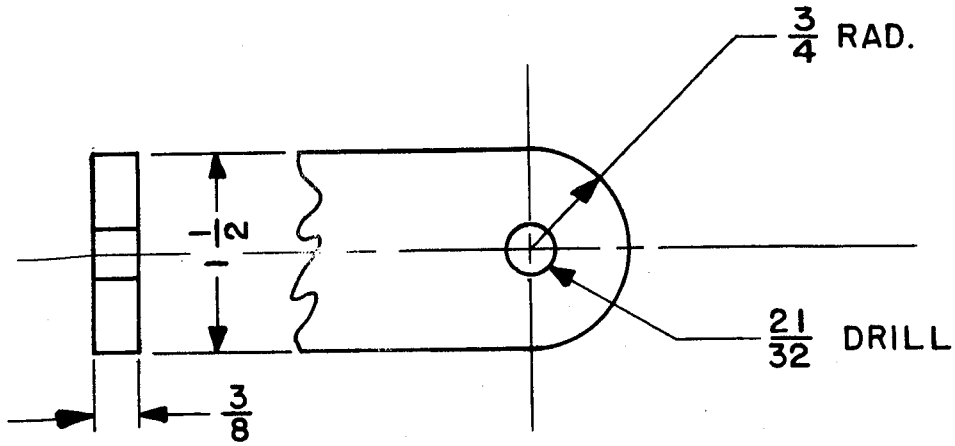

SH 10212

Figure 5 - Mounting strap.

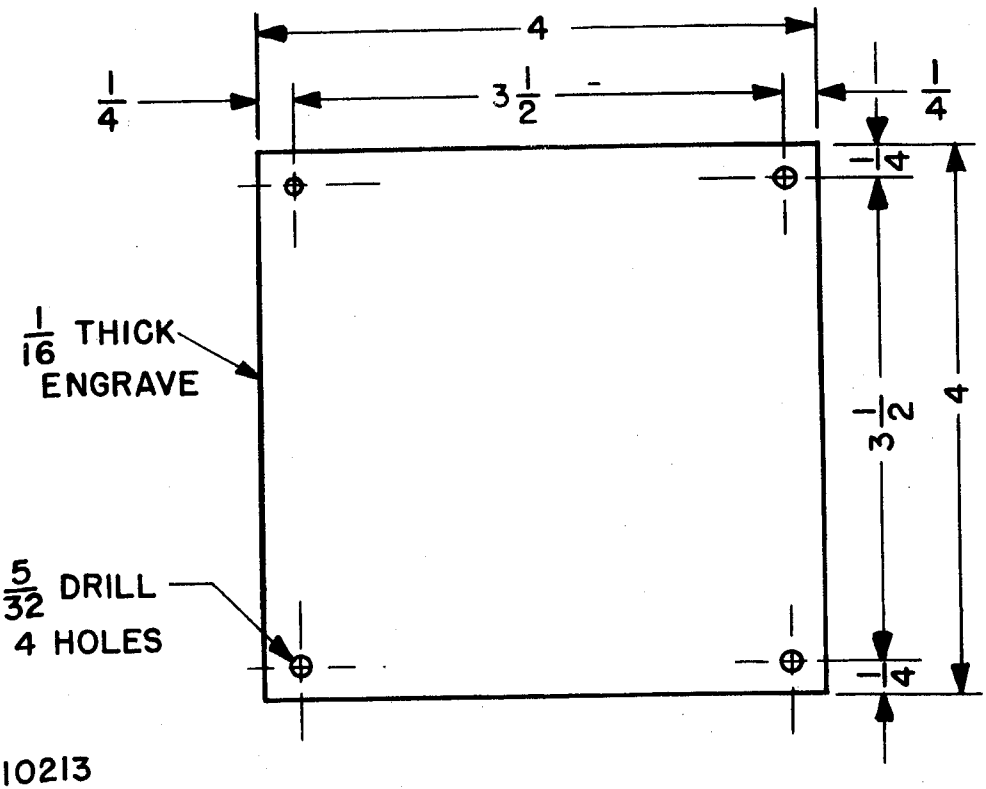

SH 10213

Figure 6 - Identification plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-C-24404, dated 1 Sep 1971 does not include foldouts for pages 13,14 / 17, 18 /19,20 / 23,24 / 25,26 / 27,28 . Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these foldouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.


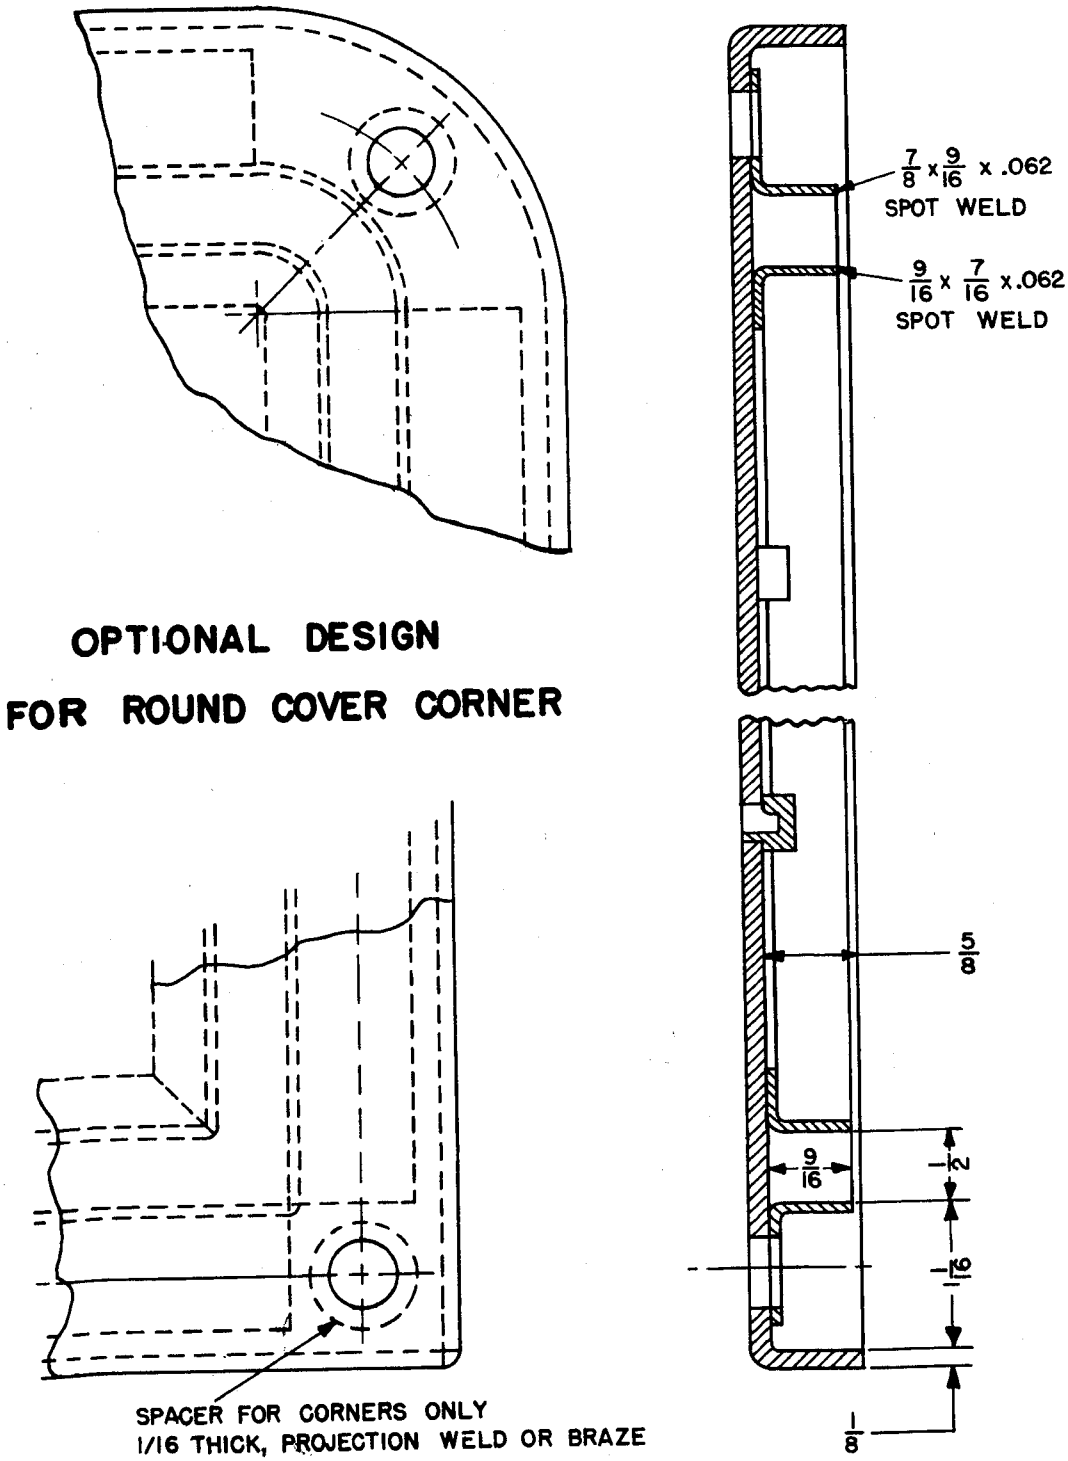


Figure 8 - Cover details.

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

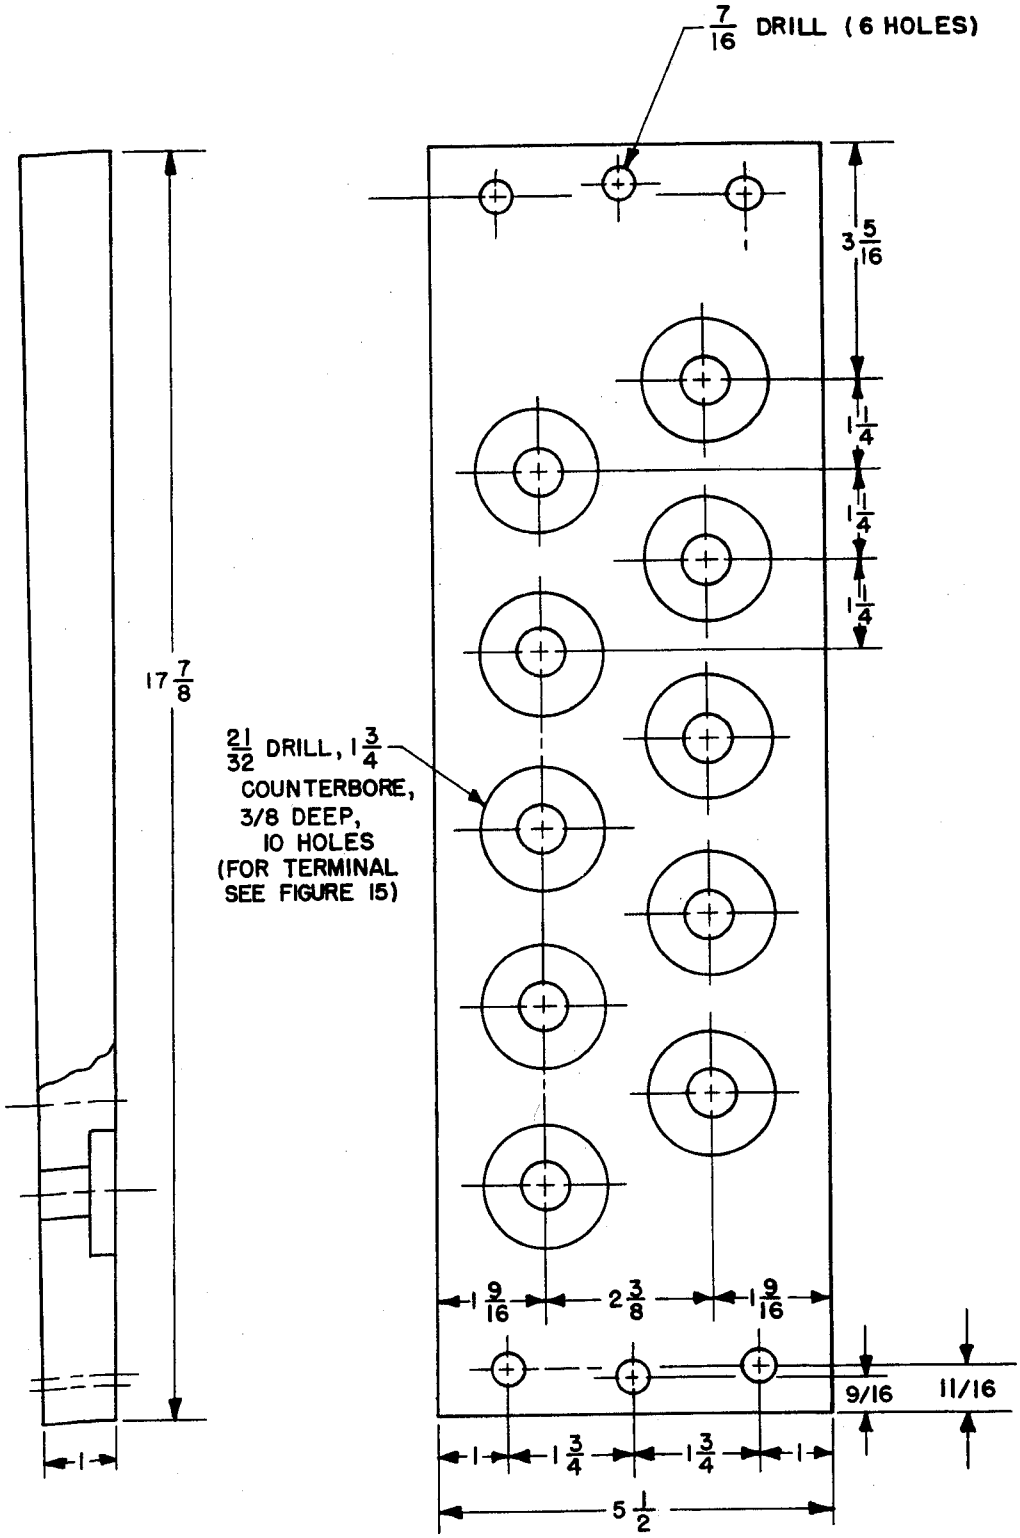

SH 10218

Figure 11 - Terminal strip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

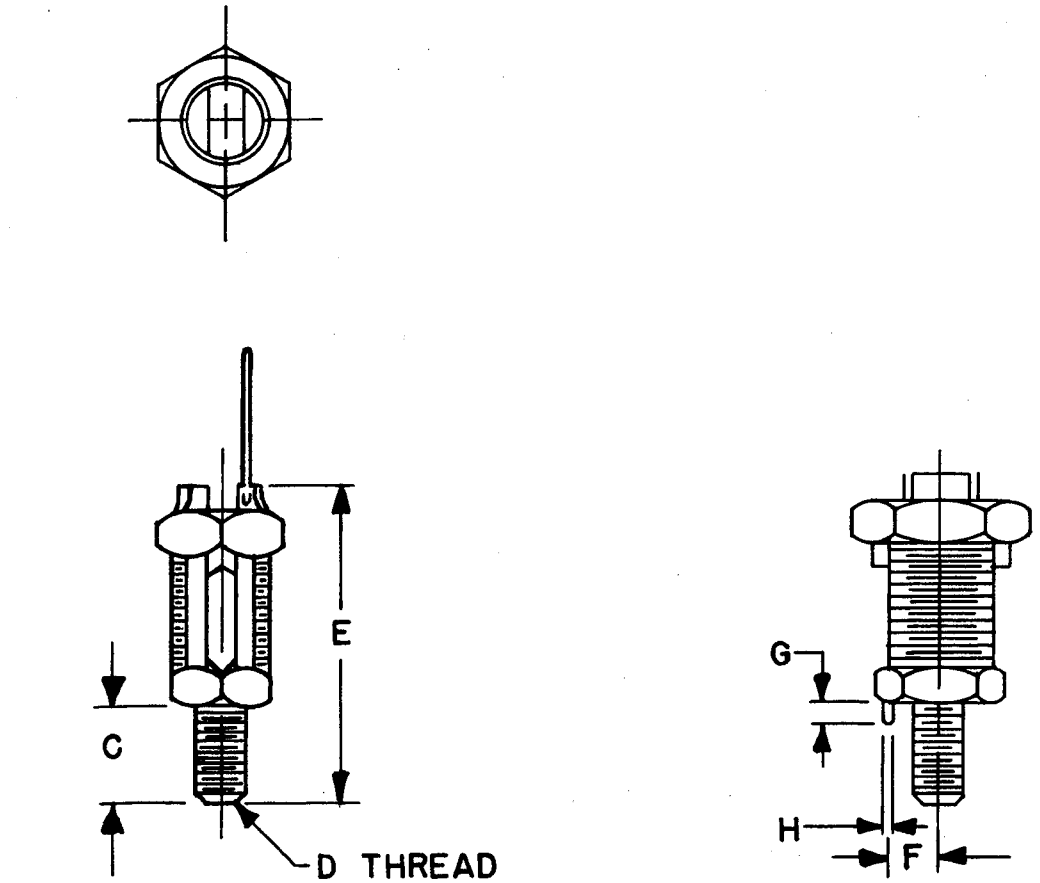


Figure 15 - Stud terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.