INCH-POUND
MIL-DTL-24402/5B(SH)
11 February 2014
SUPERSEDING
MIL-F-24402/5A(SH)
10 February 1992

DETAIL SPECIFICATION SHEET

FILTER INDICATORS, DIFFERENTIAL PRESSURE, HYDRAULIC

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24402.

CLASSIFICATION. Filter differential pressure indicators covered by this specification sheet shall be designated using part or identifying numbers (PINs) as follows:

M	**24402**	**/5**	**-**	**G150D**
Prefix to indicate a military specification	Specification number	Applicable specification sheet		Dash number (see indicator type and mounting flange configuration)

DASH NUMBER. The dash number for indicators consists of a letter designating the indicator type followed by a number representing the range or actuating pressure of the indicator and a letter suffix, when applicable, designating the flange configuration.

Examples: M24402/5-G150D is for a gauge-type indicator with a minimum range of 150 lb/in² differential and a dual-bolt circle, 8-hole mounting flange.

M24402/5-M45 is for a mechanical pop-up indicator with an actuation pressure of 45 lb/in² differential.

INDICATOR TYPE.

GAUGE INDICATORS. Gauge indicators shall be designated by the following dash numbers:

G150 - Gauge shall have a minimum range of 30 to 150 lb/in² differential.

MECHANICAL INDICATORS. Mechanical indicators shall be designated by the following dash numbers:

M45 - Actuation pressure shall be 45±5 lb/in² differential.

M90 - Actuation pressure shall be 90±10 lb/in² differential.

ELECTRICAL INDICATORS. Electrical indicators with mechanical pop-up indicator shall be designated by the following dash numbers:

E45 - Actuation pressure shall be 45±5 lb/in² differential.

E90 - Actuation pressure shall be 90±10 lb/in² differential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:48Z
Check the source to verify that this is the current version before use.

MOUNTING FLANGE CONFIGURATION. The differential pressure indicator mounting flange configuration shall be designated by a suffix as follows:

No suffix - Standard 4-hole flange to mate with figure 1 gland of MIL-DTL-24402.

D - Dual-bolt circle, 8-hole flange to mate with figure 1 gland of MIL-DTL-24402 but also containing four holes of 0.172±0.003-inch diameter equally spaced on a 1.069-inch diameter bolt circle.

The D suffix is included in the part number to identify an indicator suitable for multiple mounting configurations for logistic support.

PART NUMBER CROSS REFERENCE. Table I provides a cross reference between old (MIL-F-24402D and earlier) and new part numbers.

TABLE I. Cross reference of part numbers.

New part numbers	**Old part numbers**	
(Fatigue rated)	**(Fatigue rated)**	**(Non-fatigue rated)**
M24402/5-E90	M24402 Form E-3	M24402 Form E-0
M24402/5-E45	-	-
M24402/5-G150	M24402 Form G-3	M24402 Form G-0
M24402/5-M90	M24402 Form M-3	M24402 Form M-0
M24402/5-M45	-	-

SUBSTITUTION OF ASSEMBLIES. Indicators with new part numbers may be substituted for corresponding indicators with old part numbers as shown in table I. Only indicators with old part numbers that are fatigue rated may be substituted for indicators with new part numbers.

REQUIREMENTS.

a. Configuration. The indicators shall comply with the envelope dimensions shown on figure 1.

(1) Male gland dimensions. The male gland shall comply with the dimensions shown on figure 2.

(2) Seals. The O-rings and backup ring specified on figure 2 shall be supplied already assembled onto the indicator.

(3) Mounting fasteners. The mounting fasteners may be NAS 1351N4H*, where '*' is the length of the fastener in sixteenths of an inch. Length of the fastener shall be selected to provide a thread engagement of between 1¼ and 1½ times the diameter of the fastener. Fastener torque values shall be as specified (see 6.2 of MIL-DTL-24402).

b. Maximum rated operating pressure. The indicators shall have a rated operating pressure of 3,000 lb/in².

c. Surge lockout pressure. For mechanical and electrical indicators. The minimum surge lockout differential pressure shall be 15 lb/in² greater than the nominal actuation differential pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:48Z
Check the source to verify that this is the current version before use.

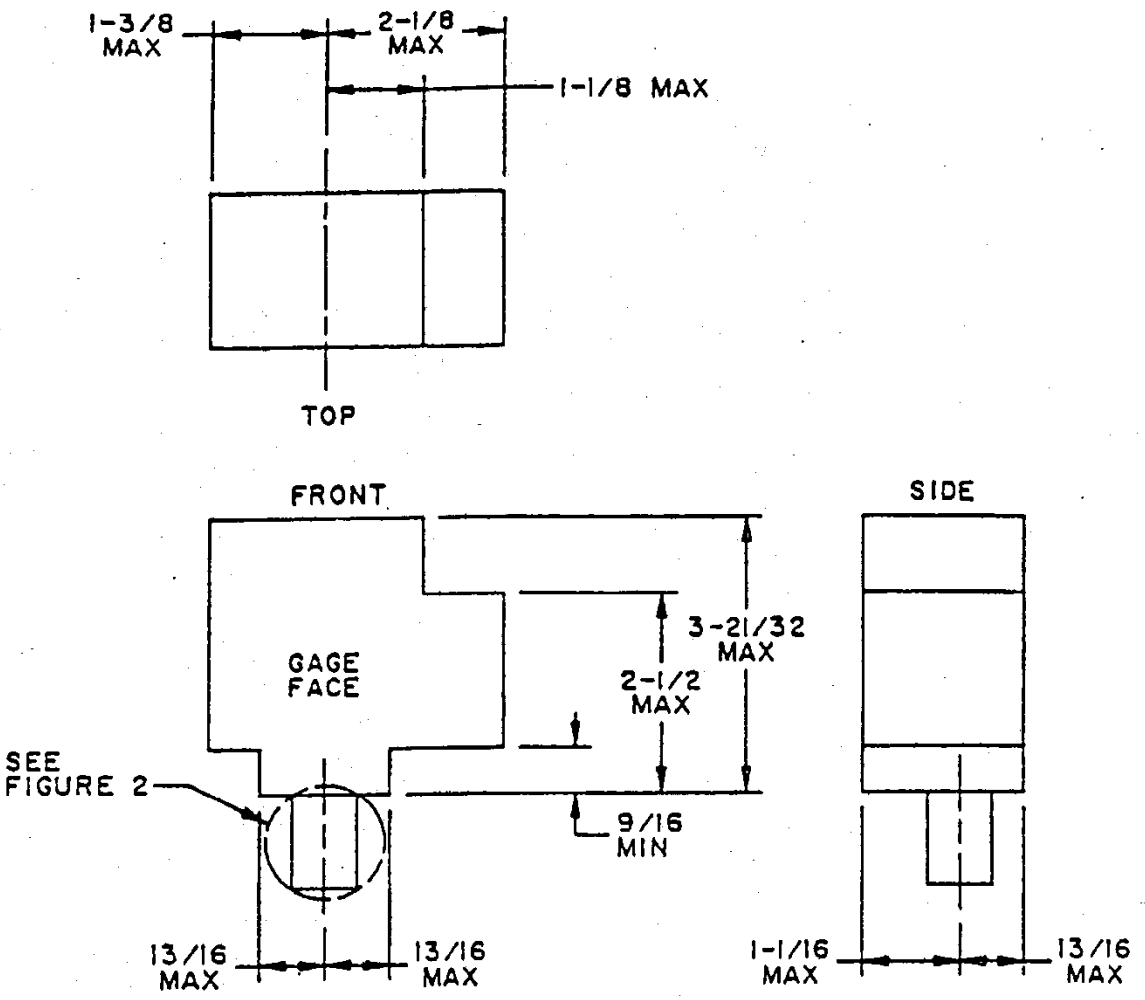


FIGURE 1. Pressure indicator envelope dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:48Z
Check the source to verify that this is the current version before use.

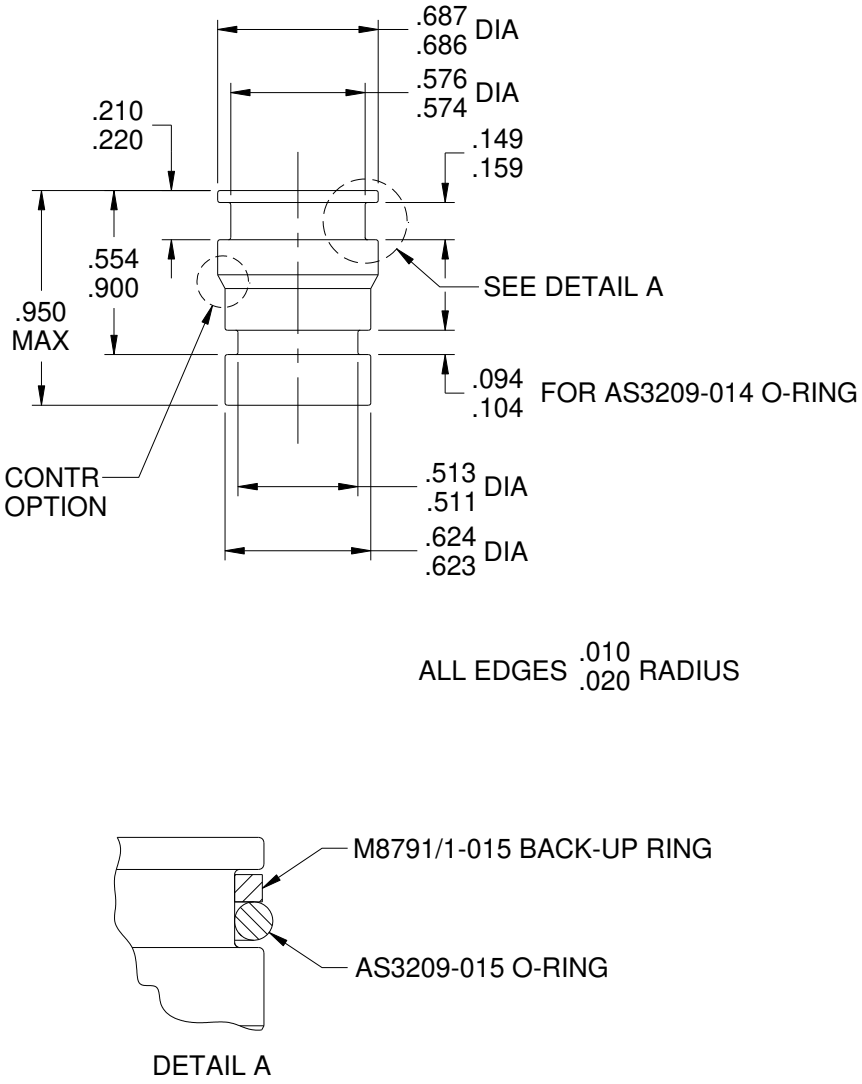


FIGURE 2. Male gland dimensions.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 4330-2013-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:48Z
Check the source to verify that this is the current version before use.