INCH-POUND
MIL-P-24395/1B(SH)
23 February 1993
SUPERSEDING
MIL-P-24395/1A(SH)
10 October 1988

MILITARY SPECIFICATION SHEET

PANEL, GROUND DETECTOR, 120 VOLTS (SYMBOL 1005.1) AND 450 VOLTS (SYMBOL 1005.2) ALTERNATING CURRENT, THREE PHASE, 60 OR 400 HERTZ, DRIPPROOF


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-P-24395(SHIPS).

AMSC N/A FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:45Z
Check the source to verify that this is the current version before use.

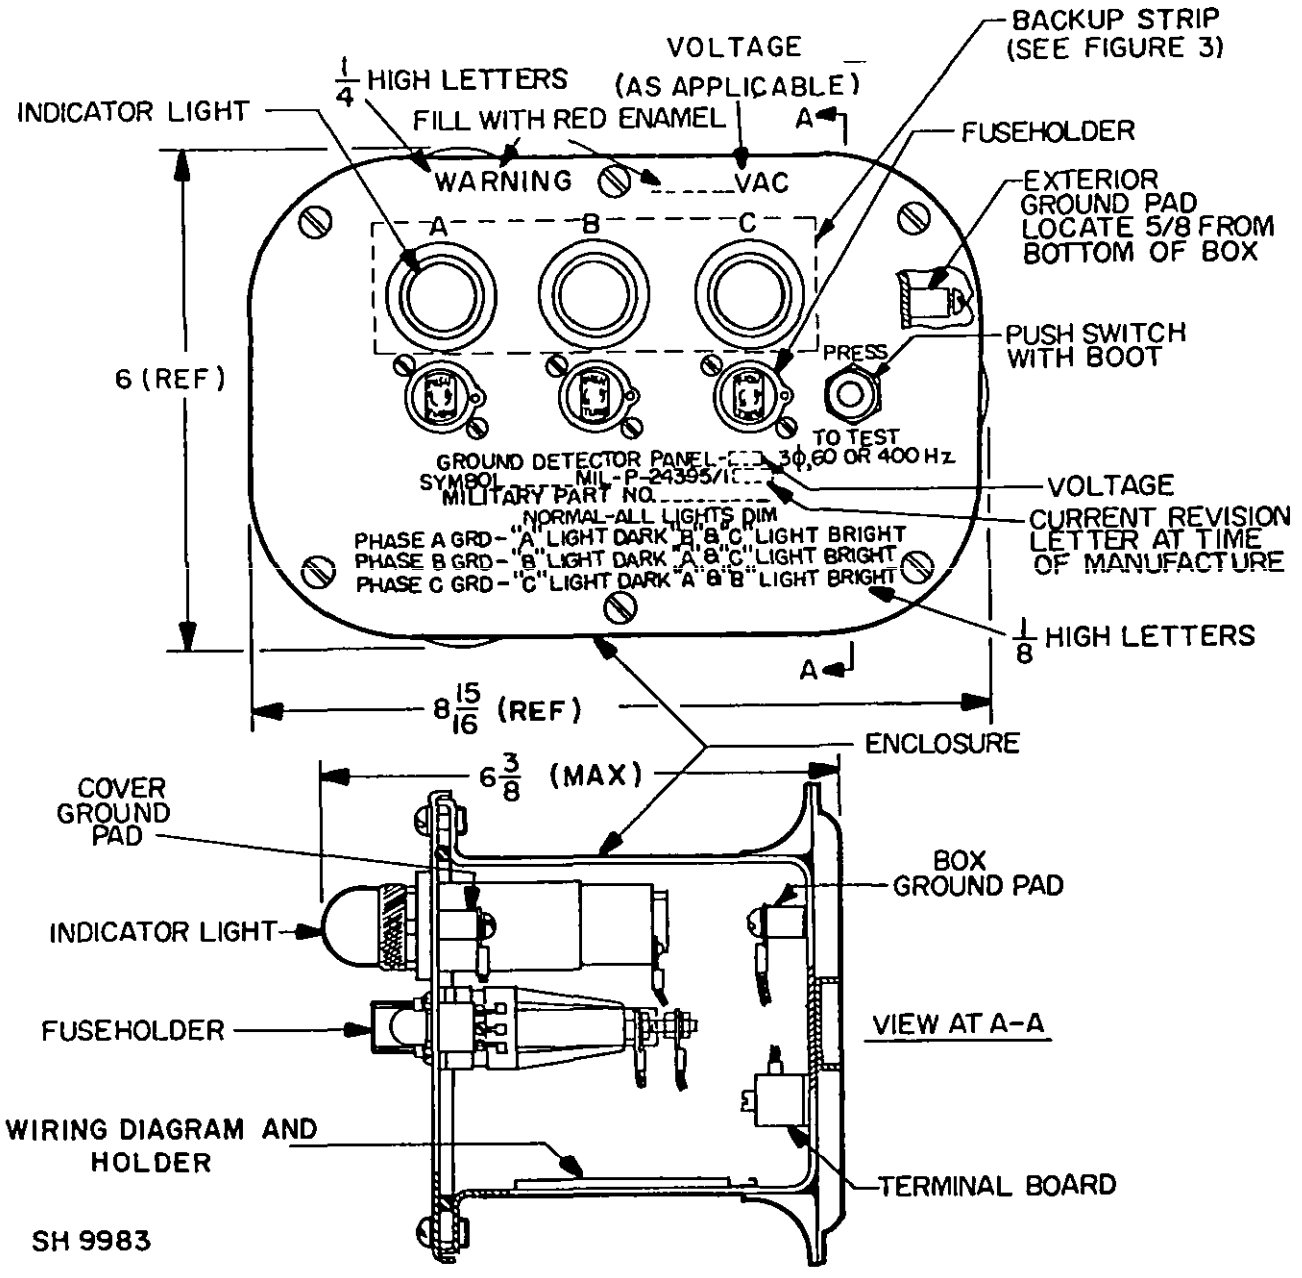

Notes:

1. Unless otherwise specified, all dimensions are in inches. Tolerances are plus or minus 1/64 for fractions and plus or minus 0.005 for decimals.
2. Installing activity: Keep face of ground pads free of paint.

FIGURE 1. Ground detector panel.

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:45Z
Check the source to verify that this is the current version before use.

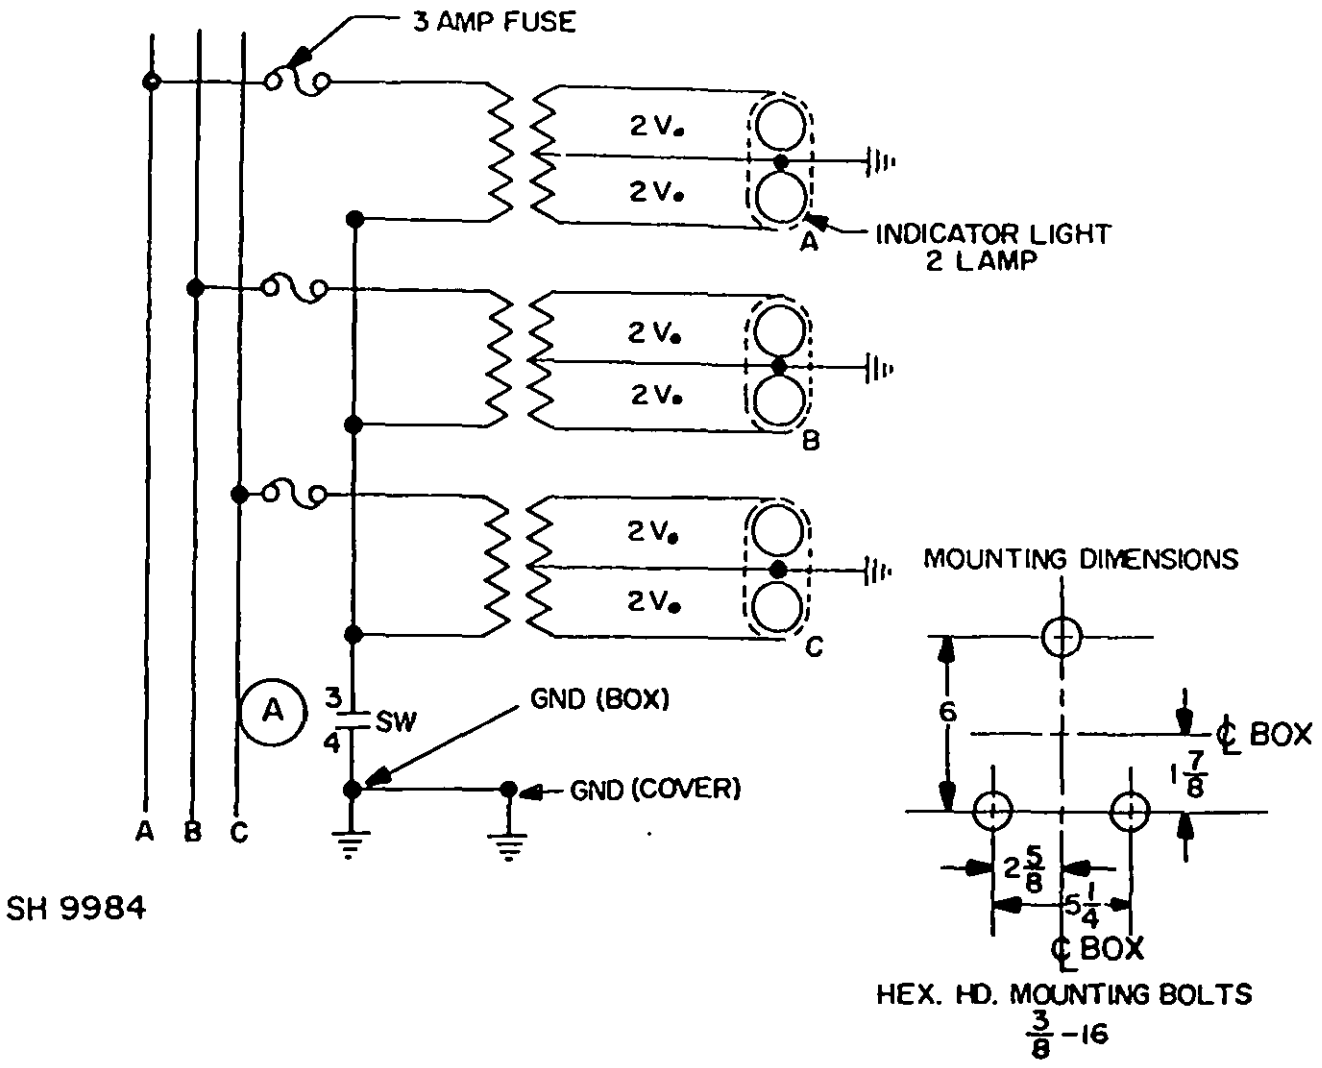


FIGURE 2. Wiring diagram for ac ground detector panel.

Ⓐ denotes changes

TABLE I. Parts for one unit.

Symbol no.	Military part no.	Voltage application	Fuse holder
1005.1	M24395/1-001	120 volt ac, 3 phase	MIL-F-19207/2 type FHL11U
1005.2	M24395/1-002	450 volt ac, 3 phase	MIL-F-19207/3 type FHL12U

Source: https://assist.dla.mil -- Downloaded: 20261-19T21:45Z
Check the source to verify that this is the current version before use.

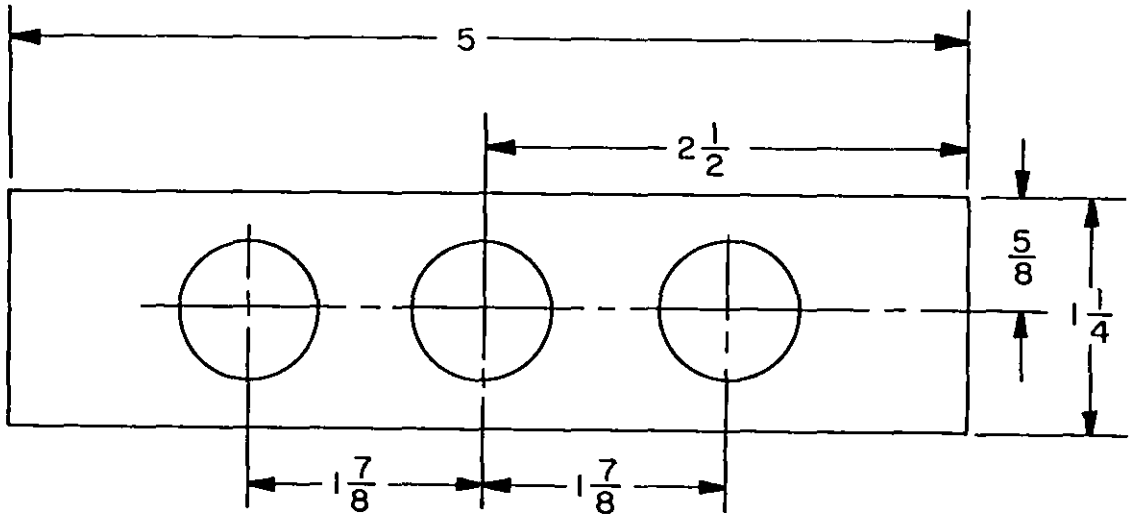


FIGURE (3)
BACKUP STRIP (BRASS) 3/32 THICK

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Enclosure: Shall conform to MIL-E-24142/4.

Push switch:

For 120 volts: Type specified in MIL-S-8805/20, with boot specified in MIL-B-5423/7.

For 450 volts: Controls Company of America, control switch division no. D20/W2, or equal, with boot specified in MIL-B-5423/7.

Indicator light:

Housing: Type LH98/3 for 120 volts and type LH98/4 for 450 volts, 60 or 400 Hz, of MIL-L-3661/65.
Lenses: Type LC40CN3 of MIL-L-3661/54.
Lamp: Incandescent, T-1-3/4, midget, screw base in accordance with MS15612.

Fuseholder: As specified in table I.

Fuses: Type F03A250V3A for 120 volts and type F60C500V3A for 450 volts in accordance with MIL-F-15160/3 and MIL-F-15160/60, respectively.

Terminal board: Type 9TB4 as specified in MIL-T-55164/15.

Interior wiring: B-16 in accordance with MIL-W-16878/14.

Degree of enclosure: Dripproof.

Part or Identifying Number (PIN): The PIN shall consist of the basic number of this specification sheet and a dash number taken from table I.

Example of PIN: M24395/1-001.

Superseding data: The PIN M24395/1-001 supersedes symbol no. 1005 of Drawing 815-1197222.

Preparing activity:
Navy - SH
(Project 6110-N374

Source: https://assist.dla.mil -- Downloaded: 20261O-19T21:45Z
Check the source to verify that this is the current version before use.