INCH-POUND

MIL-DTL-28840/10C
26 April 2007
SUPERSEDING
MIL-C-28840/10B(EC)
26 May 1981

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS, RECEPTACLE, WALL MOUNTING, CLASSES D AND DS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

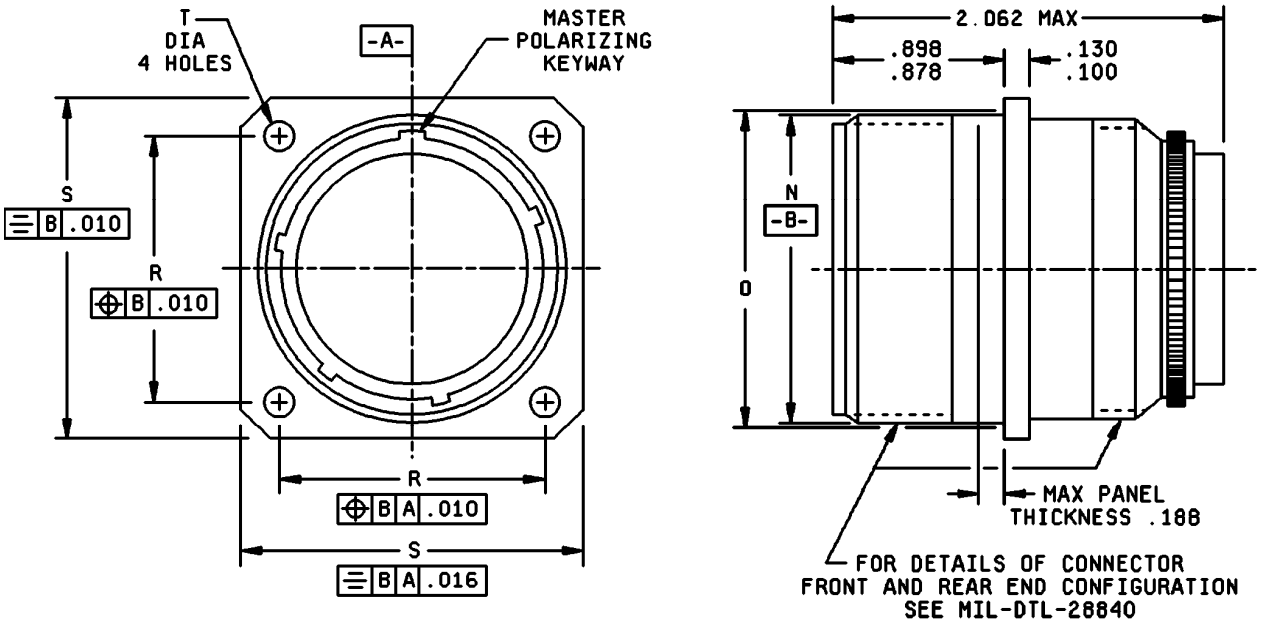

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	.25	.100	2.54	.188	4.78	.898	22.81
.016	.41	.130	3.30	.878	22.30	2.062	52.37

FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

Designator 1/	N dia max	O reference mounting hole	R T.P. centerline to centerline	S	T	For insert arrangements, see MIL-STD-1698
A (11)	.750 (10.05)	.812 (20.62)	.750 (19.05)	1.043 (26.49) 1.003 (25.48)	.130 (3.30) .115 (2.92)	Section 90
B (13)	.875 (22.22)	.937 (23.80)	.843 (21.41)	1.158 (29.41) 1.118 (28.40)		Section 10
C (15)	1.062 (26.97)	1.124 (28.55)	.968 (24.59)	1.278 (32.46) 1.238 (31.45)		Section 20
D (17)	1.125 (28.58)	1.187 (30.15)	1.015 (25.78)	1.403 (35.64) 1.363 (34.62)		Section 30
E (19)	1.312 (33.32)	1.374 (34.90)	1.140 (28.96)	1.528 (38.81) 1.488 (37.80)		Section 40
F (23)	1.500 (38.10)	1.562 (39.67)	1.281 (32.54)	1.738 (44.15) 1.698 (43.13)		Section 50
G (25)	1.625 (41.28)	1.687 (42.85)	1.392 (35.36)	1.838 (46.69) 1.798 (45.67)	.157 (3.99) .142 (3.61)	Section 60
H (29)	1.812 (46.02)	1.874 (47.60)	1.568 (39.83)	2.158 (54.81) 2.118 (53.80)		Section 70
J (33)	2.000 (50.80)	2.062 (52.37)	1.734 (44.04)	2.348 (59.64) 2.308 (58.62)	.183 (4.65) .168 (4.27)	Section 80

NOTES:

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating
5. Designator of backshell size within each shell size.

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.
Insert Arrangements: See the section of MIL-STD-1698 corresponding to the desired shell size.
Shell polarization: 1 thru 6, key position
Marking: Mark Part or Identifying number (PIN) on the shell.
Mating counterpart: Plug connectors specified in MIL-DTL-28840/16, through /19, /26, /28 and /29.
Installation and removal tools: As specified in MIL-I-81969/33 and /34.
A backshell shall be used to meet moisture and water pressure requirements

PIN example:

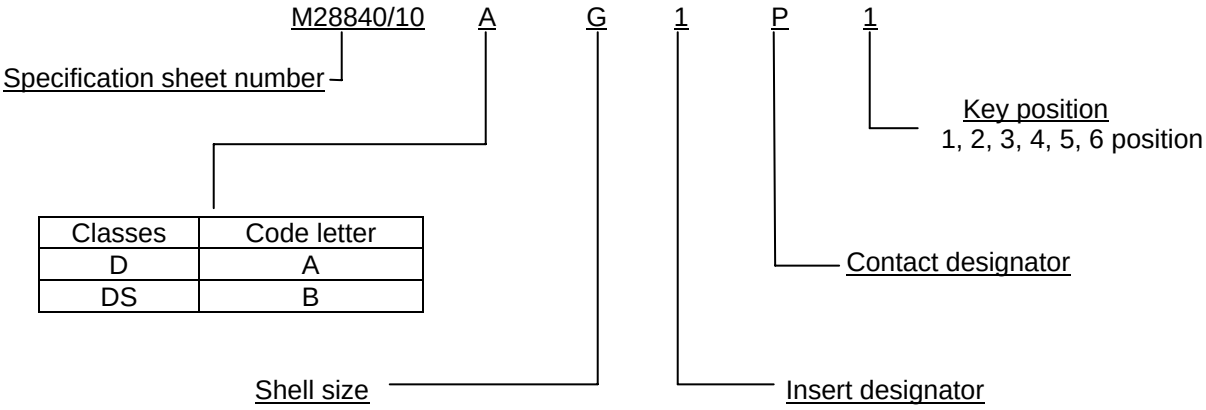

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16
MIL-DTL-28840/17
MIL-DTL-28840/18
MIL-DTL-28840/19
MIL-DTL-28840/26
MIL-DTL-28840/28
MIL-DTL-28840/29
MIL-I-81969/33
MIL-I-81969/34
MIL-STD-1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Navy - OS, SH

(Project 5935–2005-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.