INCH-POUND

MIL-C-28840/3C(ES)
18 April 1994
SUPERSEDING
MIL-C-28840/3B(EC)
9 February 1993

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CLAMPS, STRAIN RELIEF, 45°, OPEN FOR ELECTRICAL CONNECTORS

This specification is approved for use by the Space and Naval Warfare Systems Command, Department of Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28840.

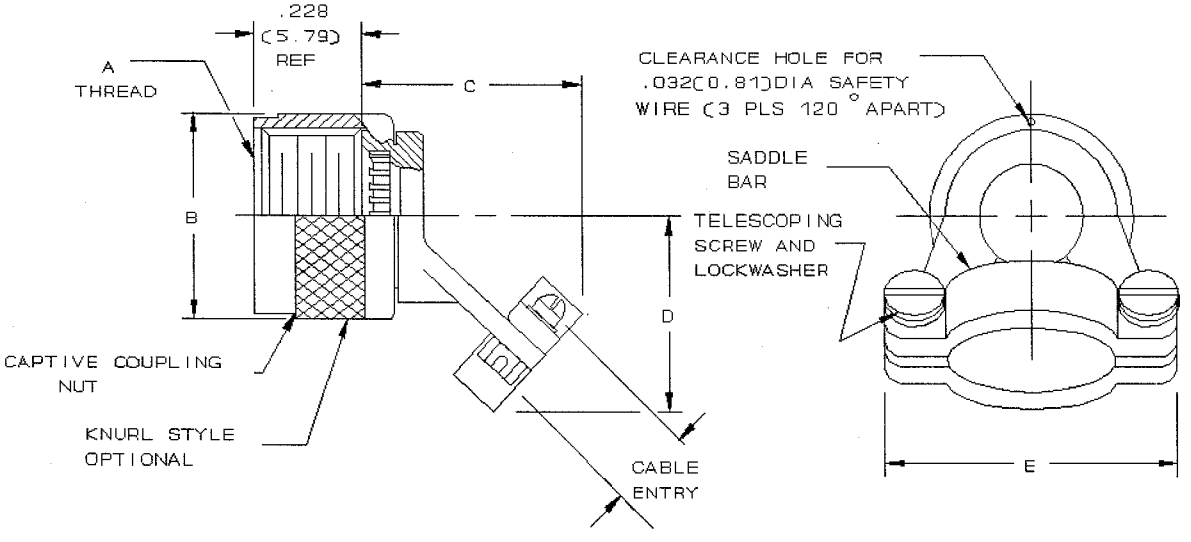


FIGURE 1. Dimensions and configurations.

Ⓒ denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261-20T19:32Z
Check the source to verify that this is the current version before use.

Designator (see note 3)	A thread class 2B	B max dia	C max closed	D max	E max	Screw size ref.	Cable entry	
							Min	Max
A (11)	.750-20 UNEF	1.028 (26.11)	1.650 (23.60)	.929 (23.60)	.903 (22.94)	.114-40	.177 (4.50)	.286 (7.26)
B (13)	.875-20 UNEF	1.141 (28.98)	1.650 (23.60)	.929 (23.60)	.977 (24.82)	.114-40	.177 (4.50)	.286 (7.26)
C (15)	1.000-20 UNEF	1.263 (32.08)	1.765 (44.60)	1.056 (26.82)	1.151 (29.24)	.114-40	.250 (6.35)	.416 (10.57)
D (17)	1.125-18 UNEF	1.387 (35.23)	1.874 (47.60)	1.233 (31.32)	1.281 (32.54)	.114-40	.291 (7.39)	.476 (12.09)
E (19)	1.250-18 UNEF	1.513 (38.43)	1.918 (48.72)	1.296 (32.92)	1.406 (35.71)	.114-40	.348 (8.84)	.626 (15.90)
F (23)	1.438-18 UNEF	1.703 (43.51)	1.962 (49.83)	1.358 (34.49)	1.576 (40.03)	.134-32	.429 (10.90)	.831 (21.11)
G (25)	1.562-18 UNEF	1.825 (46.35)	2.006 (50.95)	1.420 (36.07)	1.666 (42.32)	.134-32	.523 (13.28)	.956 (24.28)
H (29)	1.875-16 UN	2.143 (54.43)	2.301 (58.45)	1.634 (41.50)	2.046 (51.97)	.134-32	.643 (16.33)	1.081 (27.46)
J (33)	2.062-16 UNS	2.329 (59.16)	2.389 (60.68)	1.859 (47.22)	2.209 (56.11)	.162-32	.704 (17.88)	1.187 (30.15)

NOTES:
1. Dimensions are in inches. Dimensions apply after plating.
2. Metric equivalents are given for general information only.
3. Shell sizes are provided within parentheses for information and are not a part of the designator.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-28840, figure 7.

Material and finish: See table I.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:32Z
Check the source to verify that this is the current version before use.


TABLE I. Material and finish.

Material and finish designator	Material	Finish
W	Aluminum alloy in accordance with QQ-A-225, QQ-A-591, or QQ-A-601	Cadmium plate, olive drab over electroless nickel
D	Corrosion resistant steel in accordance with QQ-S-763, Class 316	Cadmium plate, black 1/

1/ The screws and washers shall be passivated in accordance with QQ-P-35.

Marking: The strain relief clamp shall be identified with the manufacturer's name or trademark and the Part or Identifying Number (PIN).

Part or Identifying Number (PIN) example:

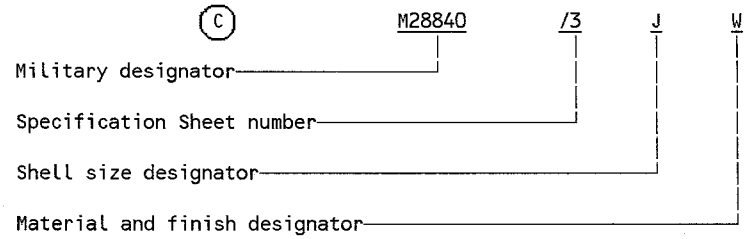

QUALIFICATION: One sample in each shell size for which qualification is desired shall be tested in accordance with MIL-C-28840, table V, group 5.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

CONCLUDING MATERIAL

Custodian:
DLA - ES
Navy - EC

Review activity:
Navy - SH

User activities:
Navy - OS, YD

Preparing activity:
DLA - ES

(Project 5935-D519)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:32Z
Check the source to verify that this is the current version before use.