MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, METAL CONDUIT FOR EMI SHIELDING

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840.

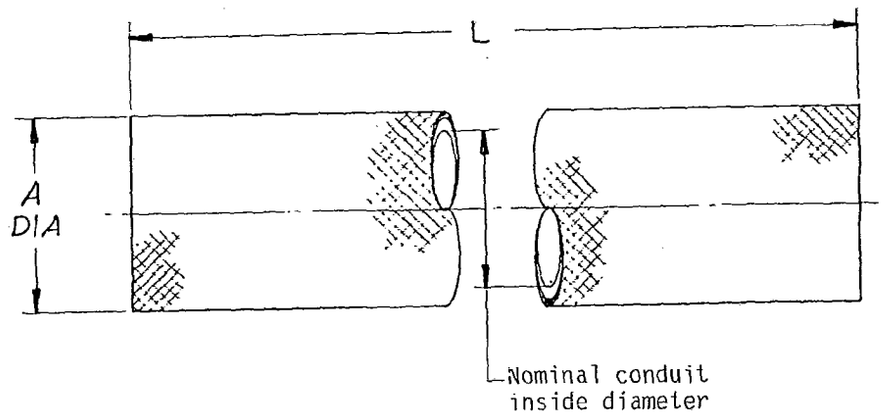

FIGURE 1. Configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:32Z
Check the source to verify that this is the current version before use.

TABLE I

SIZE	NOMINAL CONDUIT I.D.	A DIA. ± .010 (0.25)	L
03	.375 (9.52)	.525 (13.34)	50 ft. MAX
04	.500 (12.70)	.650 (16.51)	
05	.625 (15.87)	.765 (19.43)	
06	.750 (19.05)	.925 (23.50)	
08	1.00 (25.40)	1.210 (30.73)	
10	1.25 (31.75)	1.455 (36.96)	
12	1.500 (38.10)	1.725 (43.82)	
16	2.000 (50.80)	2.200 (55.88)	

NOTES:

1. Dimensions are in inches
2. Millimeters are in parentheses
3. Metric equivalents (to the nearest .01mm) are given for general information only and are based upon 1 inch= 25.4mm
4. Material Conduit: Type C: Brass Foil
   Braid: Low Phospherous Bronze Wire
   Insulator Jacket: Neoprene

   Material Conduit: Type E: Nickel Iron Foil
   Braid: Tinned Coated Copper
   Insulator Jacket: Neoprene
5. Ordering data should specify length and tolerance in length.

EXAMPLE OF PART NO. M28840/4 10 AC

M28840/4 — Basic Part No.
10 — Size
AC — Type Designator

A: Plain
B: Insulator Jacket
C: Brass Conduit
E: Nickel-Iron Conduit

Preparing activity
NAVY-EC
(Project 5935-N092-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:32Z
Check the source to verify that this is the current version before use.