INCH-POUND

MIL-DTL-28840/6C
20 April 2004
SUPERSEDING
MIL-C-28840/6B(EC)
4 January 1983

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.


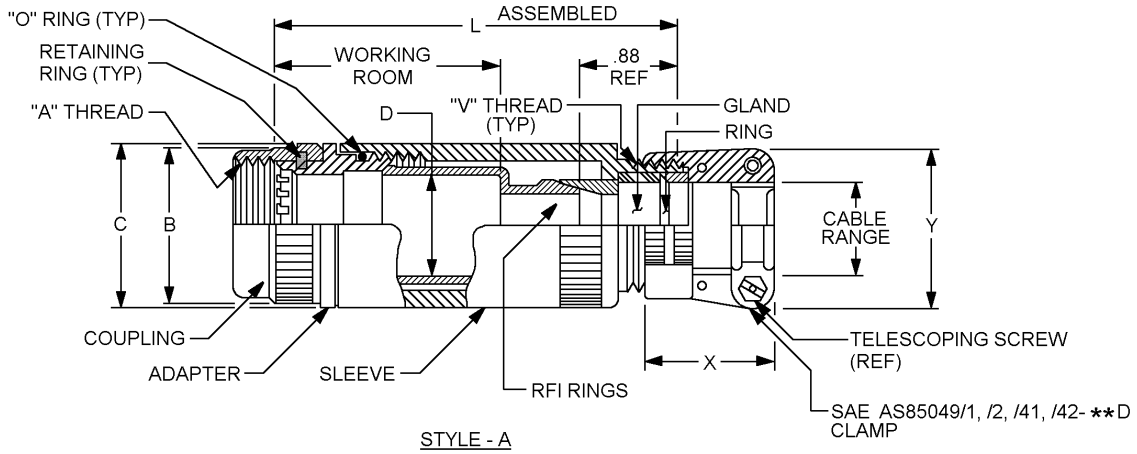


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

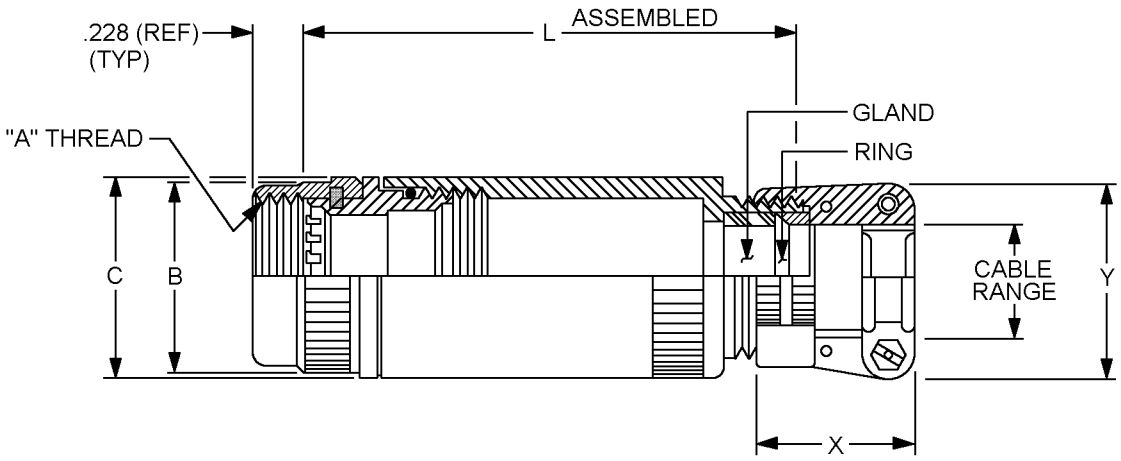

STYLE - B

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

DASH NO.	Designator 1/	A thread class 2B	B max dia	C max dia	D min dia	Cable range	
						Max	Min
01	A (11)	.750-20 UNEF	1.028 (26.11)	1.156 (29.36)	.750 (19.05)	.312 (7.92)	.188 (4.77)
02	B (13)	.875-20 UNEF	1.141 (28.98)	1.156 (29.36)	.750 (19.05)	.312 (7.92)	.188 (4.77)
03						.438 (11.12)	.281 (7.14)
04	C (15)	1.00-20 UNEF	1.263 (32.08)	1.281 (32.54)	.875 (22.23)	.312 (7.92)	.188 (4.77)
05						.438 (11.12)	.281 (7.14)
06						.562 (14.27)	.344(8.74)
07				1.406 (35.71)	1.000 (25.40)	.750 (19.05)	.438(11.12)
08	D (17)	1.125-18UNEF	1.387 (35.23)			.625 (15.87)	.375(15.87)
09						.750(19.05)	.375(9.52)
10				1.531 (38.89)	1.125 (28.58)	.938 (23.82)	.438(11.12)
11	E (19)	1.250-18 UNEF	1.513 (38.43)			.625(15.87)	.438 11.12)
12						.938(23.82)	.625 15.87)
13	F (23)	1.438-18 UNEF	1.703 (45.51)	1.656 (42.06)	1.250 (31.75)	.750 (19.05)	.375 (9.52)
14						.938(23.82)	.625(15.87)
15				1.781 (45.24)	1.375 (34.93)	1.188 (30.17)	.625(15.87)
16			1.825 (46.35)			.938 (23.82)	.812(20.62)
17	G (25)	1.562-18 UNEF				1.188 (30.17)	.875(22.23)
18						1.250 (31.75)	1.19 (30.2)
19				2.156 (54.76)	1.750 (44.45)	1.380 (35.05)	1.000(25.4)
20			2.143 (54.43)			1.188 (30.17)	1.63 (41.4)
21	H (29)	1.875-16 UNS				1.380 (38.05)	1.44 (36.6)
22			2.329 (59.16)	2.281 (57.94)	1.875 (47.63)	1.380 (35.05)	1.63 (41.4)
23	J (33)	2.062-16 UNS				1.625(41.28)	1.53 (41.4)
24			1.028 (26.11)	1.156 (29.36)	.750 (19.05)	.438 (11.12)	2.13 (54.1)
25	A (11)	.750-30 UNEF		1.281 (32.54)	.875 (22.22)	.562 (14.27)	.63 (16.00)
26	B (13)	.875-30 UNEF	1.141 (28.98)			.562 (14.27)	.344 (8.74)
27				1.406 (35.71)	1.000 (25.4)	.625 (15.87)	.375 (9.52)
28	C (15)	1.000-20 UNEF	1.263 (32.08)				

See note at end of figure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

FIGURE 1. Dimensions and configurations - Continued.

Dash no.	Designator (see note 1)	L ± .12 (± 3.05)	Working room ref.	V thread	X max dia	Y max dia
01	A (11)	3.62 (91.95)	2.00 (50.80)	.625-24 UNEF		.038 (23.82)
02	B (13)			.625-24 UNEF		1.125 (23.82)
03				.750-20 UNEF		
04	C (15)			.625-24 UNEF		.938 (23.82)
05				.750-20 UNEF		1.125 (28.57)
06				.875-20 UNEF		1.312 (33.32)
07		4.12 (104.65)	2.50 (63.50)	1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)
08	D (17)			1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)
09				1.188-19 UNEF	1.312 (33.32)	1.593 (40.62)
10				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
11	E(19)			1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)
12				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
13	F (23)	4.62 (117.35)	3.00 (76.20)	1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)
14				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
15				1.750-18 UNS	1.593 (40.46)	2.003 (53.16)
16	G (25)			1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
17		5.12 (130.05)	3.50 (88.90)	1.750-18 UNS	1.593 (40.46)	2.093 (53.16)
18				1.750-18 UNS		2.093 (53.16)
19				2.000-18 UNS	1.625 (41.28)	2.343 (59.51)
20	H (29)			1.750-18 INS	1.593 (40.46)	2.093 (53.16)
21				2.000-18 UNS	1.625 (41.28)	2.343 (59.51)
22	J (33)			2.000-18 UNS		
23				2.250-16 UNS	1.900 (48.26)	2.750 (69.85)
24	A (11)	3.62 (91.95)	2.00 (50.80)	.750-20 UNEF	1.281 (32.54)	1.125 (28.57)
25				.875-20 UNEF		1.312 (33.32)
26	B (13)					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

27		4.12 (104.65)	2.50 (63.50)	1.000-20 UNEF		
28	C (15)					

NOTES:
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only.
4. Dimensions apply after plating.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS

Dimensions and configurations: See figure 1.


Interface dimensions shall be in accordance with MIL-DTL-28840.

Material: Shall be aluminum alloy in accordance with SAE-AMS-QQ-A-225, ASTM B85, ASTM B108, or ASTM B26/B26M. Corrosion resistant steel shall be in accordance with SAE-AMS-QQ-S-763, class 316.

Finish: Aluminum components shall be cadmium plate, olive drab over electroless nickel.
Corrosion resistant steel components shall be cadmium plate, black.
The screws and washers shall be passivate in accordance with SAE-AMS-QQ-P-35.

Marking: The backshell shall be identified with the manufacturer's name or trade mark and the Part or Identifying Number (PIN).

PIN example:

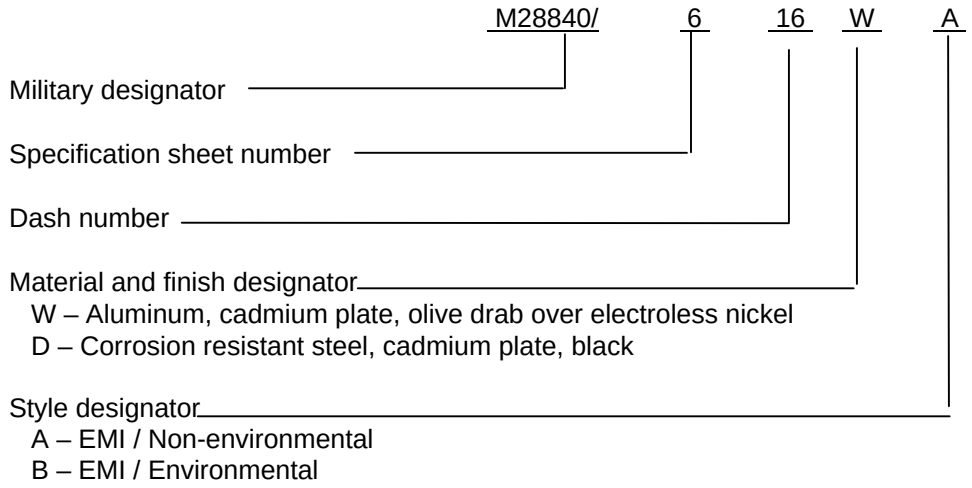

Qualification: Two samples in each shell size for which qualification is desired, shall be tested in accordance with MIL-DTL-28840.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

Reference documents. In addition to MIL-DTL-28840, this document references the following:

ASTM B26/B26M	SAE-AMS-QQ-S-763	SAE AS85049/1
ASTM B85	SAE-AMS-QQ-A-225	SAE AS85049/2
ASTM B108	SAE-AMS-QQ-P-35	SAE AS85049/41
		SAE AS85049/42

CONCLUDING MATERIAL

Custodians:
Navy – EC
DLA – CC

Preparing activity:
DLA – CC

(Project 5935–4416–005)

Review activities:
Navy – OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.