INCH-POUND

MIL-DTL-28840/6D
23 October 2009
SUPERSEDING
MIL-DTL-28840/6C
20 April 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.


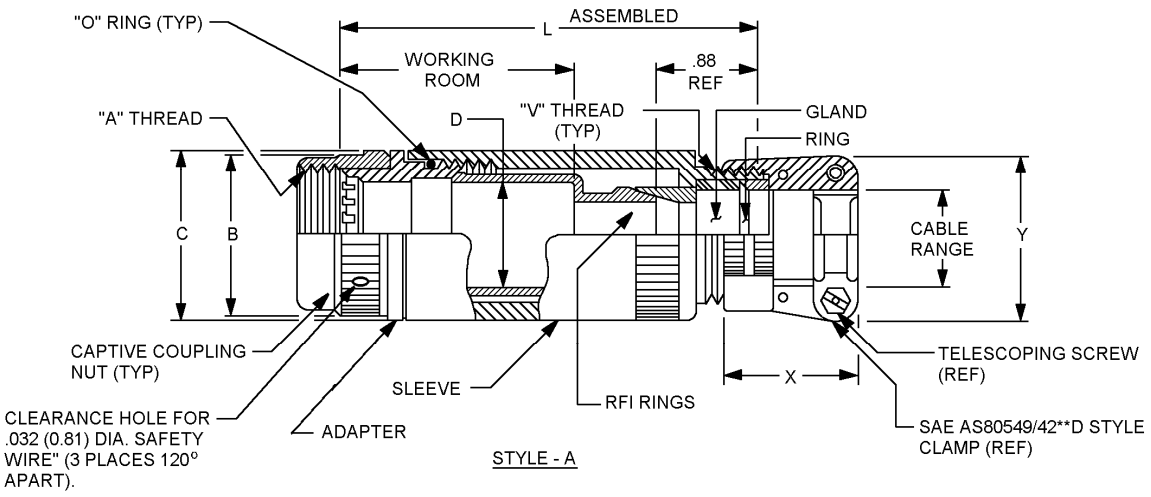


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

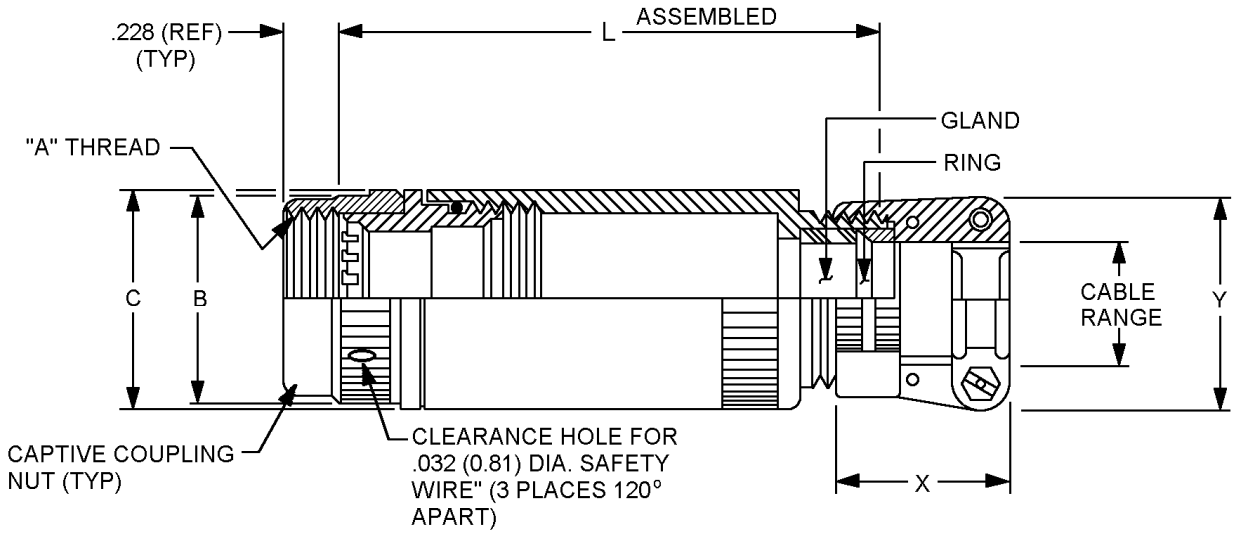

STYLE - B

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

DASH NO.	Designator (see note 1)	A thread class 2B	B max dia	C max dia	D min dia	Cable range	
						Max	Min
01	A (11)	.750-20 UNEF	1.028 (26.11)	1.156 (29.36)	.750 (19.05)	.312 (7.92)	.188 (4.77)
02	B (13)	.875-20 UNEF	1.141 (28.98)	1.156 (29.36)	.750 (19.05)	.312 (7.92)	.188 (4.77)
03						.438 (11.12)	.281 (7.14)
04	C (15)	1.00-20 UNEF	1.263 (32.08)	1.281 (32.54)	.875 (22.23)	.312 (7.92)	.188 (4.77)
05						.438 (11.12)	.281 (7.14)
06						.562 (14.27)	.344(8.74)
07				1.406 (35.71)	1.000 (25.40)	.750 (19.05)	.438(11.12)
08	D (17)	1.125-18UNEF	1.387 (35.23)			.625 (15.87)	.675(15.88)
09						.750(19.05)	.438(11.12)
10				1.531 (38.89)	1.125 (28.58)	.938 (23.82)	.625(15.88)
11	E (19)	1.250-18 UNEF	1.513 (38.43)			.625(15.87)	.375 (9.53)
12						.938(23.82)	.625 15.87)
13	F (23)	1.438-18 UNEF	1.703 (45.51)	1.656 (42.06)	1.250 (31.75)	.750 (19.05)	.438(11.12)
14						.938(23.82)	.625(15.87)
15				1.781 (45.24)	1.375 (34.93)	1.188 (30.17)	.812 (20.62)
16	G (25)	1.562-18 UNEF	1.825 (46.35)			.938 (23.82)	.625 (15.88)
17						1.188 (30.17)	.812 (20.62)
18						1.250 (31.75)	.875 (22.23)
19				2.156 (54.76)	1.750 (44.45)	1.380 (35.05)	1.000(25.4)
20	H (29)	1.875-16 UNS	2.143 (54.43)			1.188 (30.17)	.812 (20.62)
21						1.380 (38.05)	1.000(25.4)
22	J (33)	2.062-16 UNS	2.329 (59.16)	2.281 (57.94)	1.875 (47.63)	1.380 (35.05)	1.000(25.4)
23						1.625(41.28)	1.250 (25.4)
24	A (11)	.750-20 UNEF	1.028 (26.11)	1.156 (29.36)	.750 (19.05)	.438 (11.12)	.281 (7.14)
25				1.281 (32.54)	.875 (22.22)	.562 (14.27)	.344 (8.74)
26	B (13)	.875-20 UNEF	1.141 (28.98)			.562 (14.27)	.344 (8.74)
27				1.406 (35.71)	1.000 (25.4)	.625 (15.87)	.375 (9.52)
28	C (15)	1.000-20 UNEF	1.263 (32.08)				

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

Dash no.	Designator (see note 1)	L ± .12 (± 3.05)	Working room ref.	V thread	X max dia	Y ref
01	A (11)	3.62 (91.95)	2.00 (50.80)	.625-24 UNEF	1.281 (32.53)	.938 (23.82)
02	B (13)			.625-24 UNEF		.938 (23.82)
03				.750-20 UNEF		1.125 (28.57)
04	C (15)			.625-24 UNEF		.938 (23.82)
05				.750-20 UNEF		1.125 (28.57)
06				.875-20 UNEF		1.312 (33.32)
07		4.12 (104.65)	2.50 (63.50)	1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)
08	D (17)			1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)
09				1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)
10				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
11	E(19)			1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)
12				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
13	F (23)	4.62 (117.35)	3.00 (76.20)	1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)
14				1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
15				1.750-18 UNS	1.593 (40.46)	2.003 (53.16)
16	G (25)			1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)
17		5.12 (130.05)	3.50 (88.90)	1.750-18 UNS	1.593 (40.46)	2.093 (53.16)
18				1.750-18 UNS		2.093 (53.16)
19				2.000-18 UNS	1.625 (41.28)	2.343 (59.51)
20	H (29)			1.750-18 INS	1.593 (40.46)	2.093 (53.16)
21				2.000-18 UNS	1.625 (41.28)	2.343 (59.51)
22	J (33)			2.000-18 UNS		
23				2.250-16 UNS	1.900 (48.26)	2.750 (69.85)
24	A (11)	3.62 (91.95)	2.00 (50.80)	.750-20 UNEF	1.281 (32.54)	1.125 (28.57)
25				.875-20 UNEF		1.312 (33.32)
26	B (13)					
27		4.12 (104.65)	2.50 (63.50)	1.000-20 UNEF		
28	C (15)					

NOTES:

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Interface dimensions shall be in accordance with MIL-DTL-28840.

Material: Aluminum alloy in accordance with ASTM B85/B85M, ASTM B26/B26M, or ASTM B108/B108M or ASTM B209 or ASTM B211 or ASTM B221. Corrosion resistant steel in accordance with ASTM A276, ASTM A473, or ASTM A580/A580M, class 316.

Finish: Finish: Aluminum components finish shall be in accordance with MIL-DTL-28840.

Corrosion resistant steel components shall be in accordance with MIL-DTL-28840.
The screws and washers shall be passivate in accordance with SAE-AMS2700, type 2.

Marking: The backshell shall be identified with the manufacturer's name or trade mark and the Part or Identifying Number (PIN).

PIN example:

M28840/ 6 16 W A

Military designator

Specification sheet number

Dash number

Material and finish designator
- W - Aluminum, cadmium plate, olive drab over electroless nickel
- D - Corrosion resistant steel, cadmium plate, black
- F - Wrought aluminum, pure electrodeposited aluminum – non-reflective
- L - Wrought aluminum, Nickel Fluorocarbon Polymer – non-reflective
- S - Wrought aluminum, zinc nickel – non-reflective

Style designator
- A – EMI/ Environmental
- B – Environmental

Qualification: Two samples in each shell size for which qualification is desired, shall be tested in accordance with MIL-DTL-28840.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

ASTM A276	ASTM B209
ASTM A473	ASTM B211
ASTM A580/A580M	ASTM B221
ASTM B26/B26M	SAE-AMS2700
ASTM B85/B85M	
ASTM B108/B108M	

CONCLUDING MATERIAL

Custodians:
Navy – EC
DLA – CC

Preparing activity:
DLA – CC

(Project 5935–2007-218)

Review activities:
Navy – OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:33Z
Check the source to verify that this is the current version before use.